




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS


DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			VEE	28-09-10	JAG	28-09-10	XXX	12-10-10

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

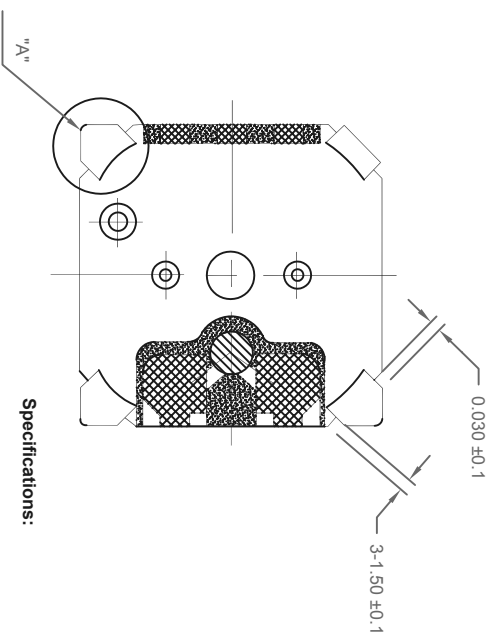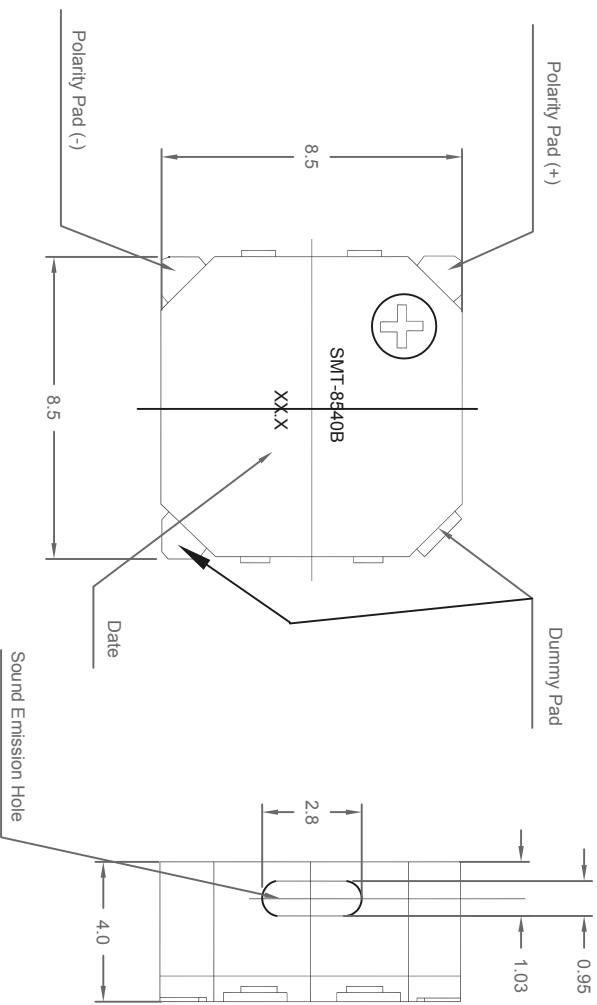

Specifications:

1. Rated voltage : 3.6V
2. Operating voltage : 2.5 to 4.5V
3. Maximum rated current : 80mA
4. Coil resistance : 16 ±2.4W
5. Coil impedance : .40W
6. Minimum sound pressure level : 95dB/10cm
7. Resonant frequency : 300Hz.
8. Case material/color : LCP 6130/black
9. Operating temperature : -30 to +70°C
10. Store temperature : -40 to +85°C
11. Weight : 0.4g

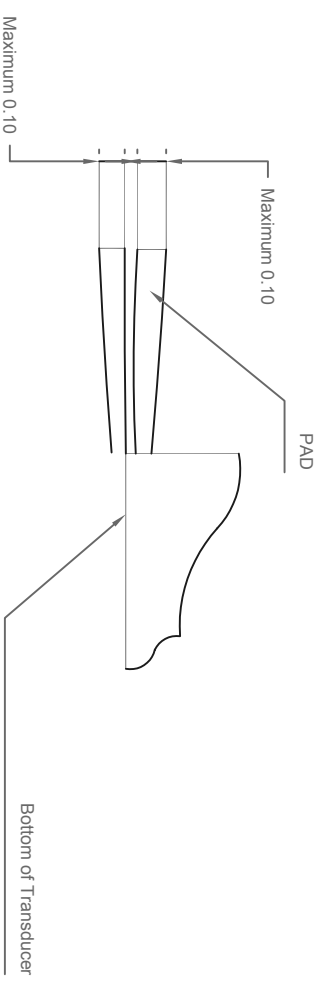

Dimensions : Inches(Millimetres)

Part Number Table

Description	Part Number
Magnetic Transducer	MCSMT-8540B-K4083

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

VEE

DATE:

28-09-10

CHECKED BY:

JAG

DATE:

28-09-10

APPROVED BY:

XXX

DATE:

12-10-10

DRAWING TITLE:

Magnetic Transducer

SIZE:

A

ELECTRONIC FILE

25R0977

REV

A

SCALE:

NTS

U.O.M.:

Millimeters

SHEET:

1 OF 1

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.