

FO-55111-A

4




3

2

1

HONEYWELL PART NUMBER
4SX87-T
PRODUCT CODE VDF0998

REV	DOCUMENT	CHANGED BY	CHECK
5	0038447	SS 28MAR08	BLR

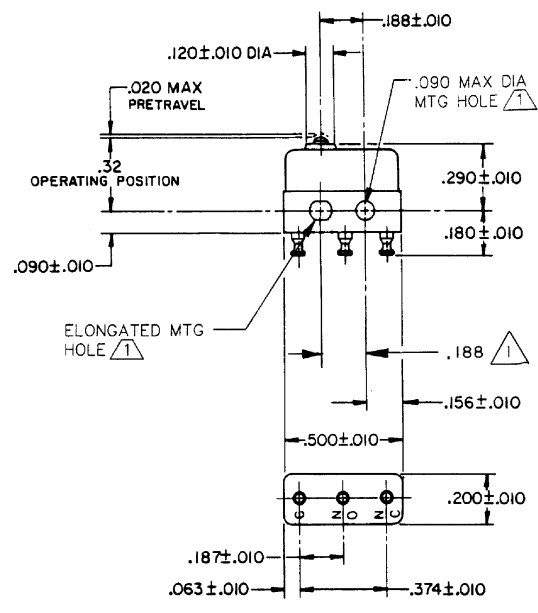

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 400° F

RELEASE NO.	PR-11892
REPLACES	X77139-SX

CHARACTERISTICS
OPERATING FORCE - - - - 5 OZ MAX
RELEASE FORCE - - - - 1 OZ MIN
DIFFERENTIAL TRAVEL - - .0025-.0050
OVERTRAVEL - - - - .004 MIN

ELECTRICAL DATA
CONTACT ARRANGEMENT S P D T
28 VOLTS DC RATING
SEA LEVEL 50,000 FT
INDUCTIVE 4 AMP 2.5 AMP
RESISTIVE 7 AMP 7 AMP
MAXIMUM INRUSH 24 AMP
APPROVALS KEMA CE 7A 250V~ T125 5E4 UL CSA 7A 250 VAC

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE .X ±
ONE PLACE .XX ±
TWO PLACE .XXX ±
THREE PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	SPK	06FEB08
CHECK	RJ	06FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

<b>Honeywell</b>			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	4SX87-T	5
SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1

4

3

2

1