

**MICRO SWITCH**  
a Honeywell Division

FED. MFG. CODE 91929

**SWITCH-BASIC**


CATALOG LISTING

V7-5F23D8-636-1

CW-C5003

CATALOG LISTING  
V7-5F23D8-636-1  
PAGE 1 OF 1  
ISSUE M  
3

X111217-V7  
REPLACES  
RELEASE NO. PR-23778  
CHECK

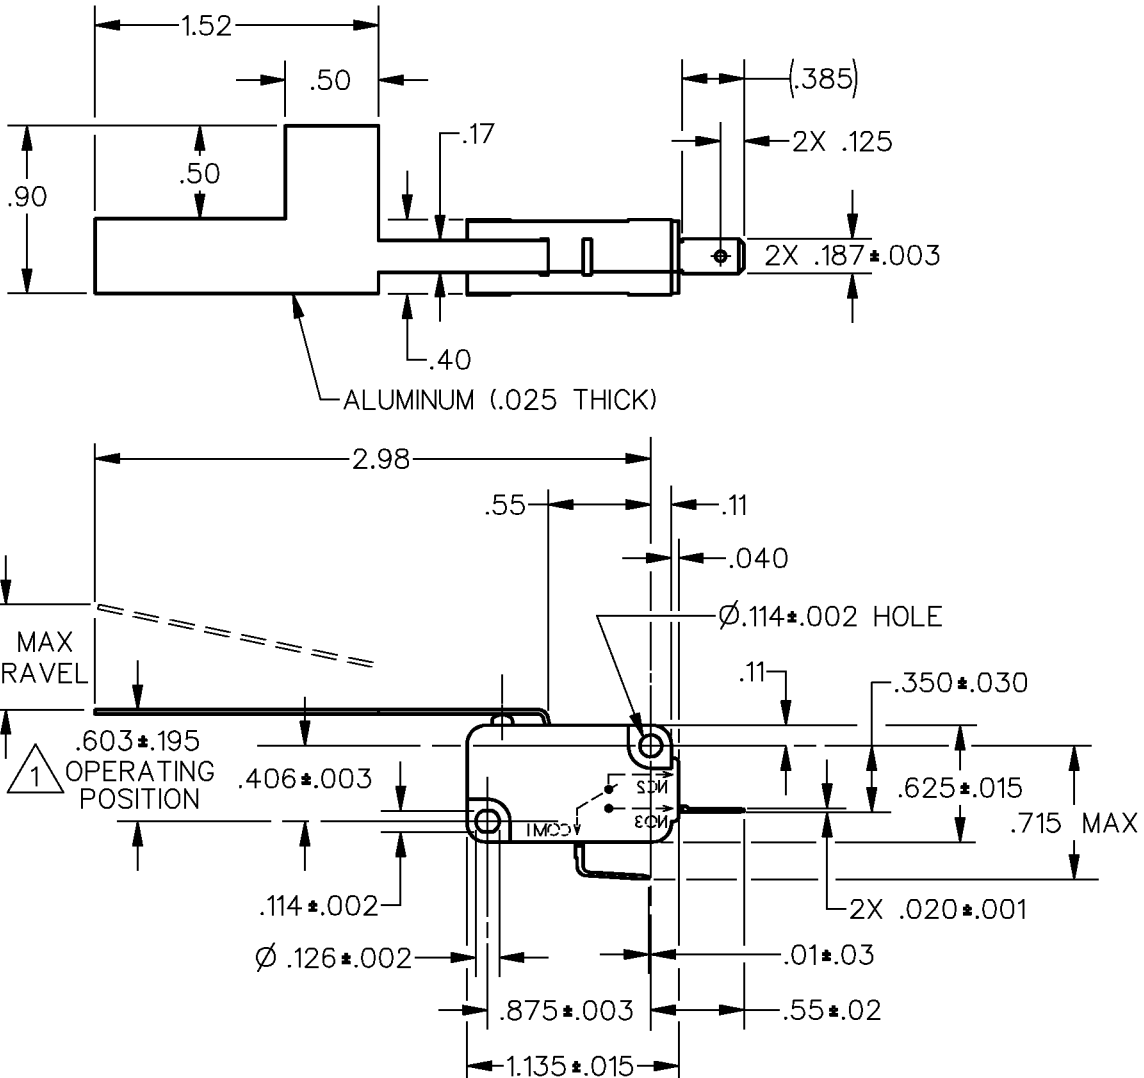


NOTES

- 1 ALL CHARACTERISTICS TAKEN WITH SWITCH MOUNTING SURFACE HORIZONTAL
- 2 - THE MASS OF THE LEVER MAY PREVENT PLUNGER FROM RETURNING THE LEVER TO FREE POSITION
- 3 - CAUTION: OVERTRAVEL FORCE ON LEVER MUST NOT RESULT IN AN OVERTRAVEL FORCE ON PLUNGER EXCEEDING ONE OUNCE
- 4 - SWITCH MATERIAL WILL WITHSTAND TEMPERATURE OF 150°C

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 2 GRAM MAX	CONTACT ARRANGEMENT S P N O	<b>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</b>	
DIFFERENTIAL TRAVEL — — — .126 MAX	L163 3A 125, 250, 277 VAC 1/10HP 250 VAC	ONE PLACE (.0) ±.030	
OVERTRAVEL — — — .241 MIN		TWO PLACE (.00) ±.015	
RELEASE TRAVEL — — — .066 MIN		THREE PLACE (.000) ±.005	
		ANGLES ±	
		WEIGHT	



REVISIONS

A	CO-94495	TSM	3 MAR 99
B	0011276	PM	16 FEB 05

DDM/CAD  
DRAWN  
T S M  
9 JUL 98  
CHECK  
J A F  
5 FEB 99  
CHECK