



Micro Commercial Components

Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

# TIP120

## NPN Epitaxial Darlington Transistors

### Features

- Low collector-emitter saturation voltage
- Amplifier applications -emitter shunt resistors
- TO-220 compact package
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

Maximum Ratings @ Ta=25°C Unless Otherwise Specified

Symbol	Rating	Rating	Unit
V <sub>CEO</sub>	Collector-Emitter Voltage	60	V
V <sub>CBO</sub>	Collector-Base Voltage	60	V
V <sub>EBO</sub>	Emitter-Base Voltage	5.0	V
I <sub>CP</sub>	Peak Collector Current	8.0	A
I <sub>C</sub>	Collector Current	5.0	A
P <sub>C</sub>	Collector power dissipation(Tc=25°C)	65	W
T <sub>J</sub>	Junction Temperature	-55 to +150	°C
T <sub>STG</sub>	Storage Temperature	-55 to +150	°C
R <sub>thJC</sub>	Thermal Resistance, Junction to case	1.92	°C/W
R <sub>thJA</sub>	Thermal Resistance, Junction to ambient	62.5	°C/W

Electrical Characteristics @ 25°C Unless Otherwise Specified


Symbol	Parameter	Min	Max	Units
OFF CHARACTERISTICS				
V <sub>(BR)CEO</sub>	Collector-Emitter Breakdown Voltage (I <sub>C</sub> =100mA, I <sub>B</sub> =0)	60	---	Vdc
I <sub>CBO</sub>	Collector-Base Cutoff Current (V <sub>CB</sub> =60Vdc, I <sub>E</sub> =0)	---	0.2	mA
I <sub>EBO</sub>	Emitter-Base Cutoff Current (V <sub>EB</sub> =5.0Vdc, I <sub>C</sub> =0)	---	2.0	mA
I <sub>CEO</sub>	Collector-Emitter Cutoff Current (V <sub>CE</sub> =30Vdc, I <sub>B</sub> =0)	---	0.5	mA

### ON CHARACTERISTICS

h <sub>FE-1</sub>	Forward Current Transfer Ratio (I <sub>C</sub> =0.5A, V <sub>CE</sub> =3.0Vdc)	1000	---	
h <sub>FE-2</sub>	Forward Current Transfer Ratio (I <sub>C</sub> =3.0A, V <sub>CE</sub> =3.0Vdc)	1000	---	
V <sub>CE(sat)-1</sub>	Collector-Emitter Saturation Voltage (I <sub>C</sub> =3.0A, I <sub>B</sub> =12mA)	---	2.0	Vdc
V <sub>CE(sat)-2</sub>	Collector-Emitter Saturation Voltage (I <sub>C</sub> =5.0A, I <sub>B</sub> =20mA)	---	4.0	Vdc
V <sub>BE(on)</sub>	Base-Emitter On Voltage (I <sub>C</sub> =3.0A, V <sub>CE</sub> =3.0A)	---	2.5	Vdc

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

### TO-220

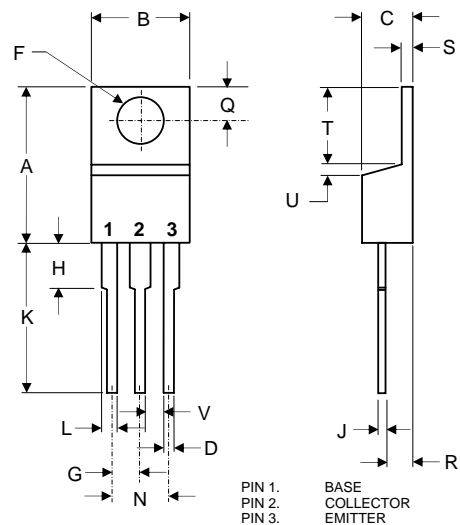

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.140	.190	3.56	4.82	
D	.020	.045	0.51	1.14	
F	.139	.161	3.53	4.09	∅
G	.190	.110	2.29	2.79	
H	---	.250	---	6.35	
J	.012	.025	0.30	0.64	
K	.500	.580	12.70	14.73	
L	.045	.060	1.14	1.52	
N	.190	.210	4.83	5.33	
Q	.100	.135	2.54	3.43	
R	.080	.115	2.04	2.92	
S	.045	.055	1.14	1.39	
T	.230	.270	5.84	6.86	
U	-----	.050	-----	1.27	
V	.045	-----	1.15	-----	



Micro Commercial Components

## Ordering Information

Device	Packing
(Part Number)-BP	Bulk;1Kpcs/Box

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*APPLICATIONS DISCLAIMER\*\*\***

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.

---

[www.mccsemi.com](http://www.mccsemi.com)