
Wall Mount, Slanted, White

0601- VANDAL RESISTANT SPEAKER ASSEMBLIES



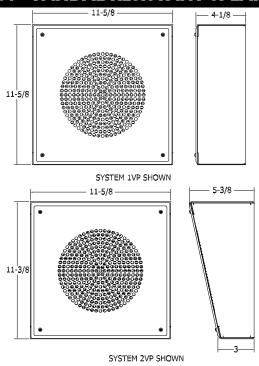

SYSTEM 2VP SHOWN

GENERAL DESCRIPTION

The Quam SYSTEM 1VP is a square format, vandal-resistant loudspeaker system.

The Quam SYSTEM 2VP is a slanted format, vandal-resistant loudspeaker system.

Both versions are a complete loudspeaker assembly, with 8" frame loudspeaker, 25/70.7V universal transformer, 16 gage square steel enclosure and baffle with #8-32 'pin-in-torx' hardware. Both versions are supplied with three (3) steel interwoven security screens mounted between the baffle and the loudspeaker. Finish: White baked epoxy hybrid.

INTENDED USE

Both variants: Protected outdoor or indoor environments SYSTEM 1VP: Vertical or horizontal surface mount SYSTEM 2VP: Vertical surface mount, downward firing Program Material: Signal tones, voice and music

SYSTEM COMPONENTS

Loudspeaker	8C10PAOT
Transformer	TBLU-5W, 25 and 70.7V, 5 taps
	at -3 dB levels
Enclosure	
SYSTEM 1VP	SE1WVP
SYSTEM 2VP	SE2WVP
Baffle	BS8VP

AUDIO SPECIFICATIONS

AUDIO SI ECII ICATIONS	
Speaker Size	8" frame
Average Sensitivity	94 dB SPL, 1W/ 1M
Loudspeaker Power	20W RMS, EIA 426A Standard
Rating	
Calculated Maximum	104dB SPL, 5W/ 1M
System Output	
Magnet Type,	BeFe Ceramic, 10 oz. Nominal
Weight	
Frequency Response	60Hz - 17 kHz EIA 462A Standard
Nominal	100° Included Angle,
Coverage Angle	-6 dB / 2 kHz, Half space
Audio Connection	7" color-coded pigtails, pre-cut

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at: www.guamspeakers.com



Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637 Phone: (800) NEED NOW Fax: (888) NEED NOW (800) 633 - 3669 (888) 633 - 3669

E-Mail: neednow@gnc.com www.quamspeakers.com







TSYSTEM1VP_SYSTEM2VP_11FE08