


QK10A Series

Crossflow Blower


467...1100mm x Ø 92mm

- AC blower with single phase motor. 90° or 180° air flow. Ball bearings and terminals. Max ambient temperature of 40 C.
- Wide, even air flow distribution. "V" shaped guide vane suppresses noise.
- Fan propeller of aluminium and air duct housing of sheet steel.
- Rotational direction CW looking at rotor.
- UL, CSA, VDE approvals on some models. Please contact application engineering

Part Number	Curve	CFM @ 0	VAC	Hertz	Power (W)	dBA	Max Amb. Temp. C	Bearing Type	Features	Capacitor (µF)	Wgt. (lbs)
QK10A-2/111589	4	940	115	50/60	580	86	40	Ball	Leads	30	20.0
QK10A-4/110756	1	410	230	50/60	85	68	40	Ball	Leads	2	10.0
QK10A-2/210955	2	900	230	60	150	66	40	Ball	Leads	3	21.0
QK10A-4/120844	3	950	230	60	670	86	40	Ball	Leads	8	22.0

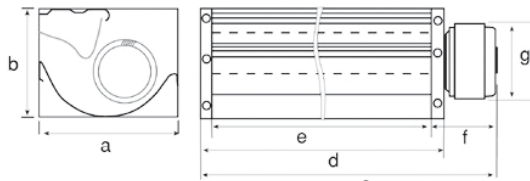

PART NUMBER	a	b	c	d	e	f	g
.../110756	7.87 (200)	6.89 (175)	19.21 (488)	16.51 (420)	14.88 (378)	3.39 (86)	3.62 (92)
.../120844	7.87 (200)	6.89 (175)	43.31 (1100)	40.16 (1020)	38.58 (980)	4.09 (104)	3.62 (92)
.../210955	7.87 (200)	6.89 (175)	25.39 (645)	20.47 (520)	18.89 (480)	5.71 (145)	5.39 (137)
.../111589	7.87 (200)	6.89 (175)	25.39 (645)	20.47 (520)	18.90 (480)	5.71 (145)	5.39 (137)

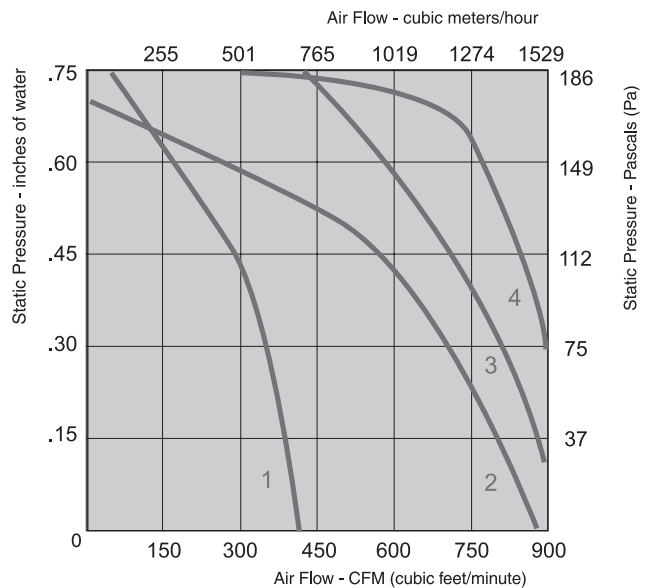

e-mail: sales@us.ebmpapst.com - TEL: 860-674-1515 - FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2004 © ebm-papst Inc. reserves the right to change any specifications or data without notice