## **BRUSHLESS DC FANS**

# F17HA

#### **IFEATURES**


- Low noise, 7 dB (A) type by the correct application of hydrodynamic design of impeller and frame
- Light weight (approx. 2.3 g)



#### **STRUCTURE**

- Cover, Frame and impeller Modified SUS, LCP and ABS/PBT alloy
- Bearing 1 sleeve bearing

#### PART NUMBER DESIGNATION

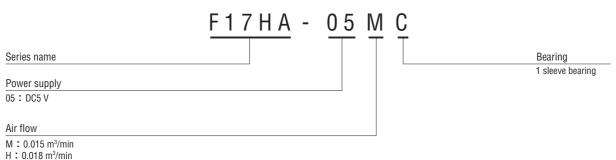

#### **ILIST OF PART NUMBERS**

Power supply	Part number	
DC5 V	F17HA-05MC	
	F17HA-05HC	


\* Verify the above part numbers when placing orders.

### STANDARD SPECIFICATIONS

Item	F17HA-05MC	F17HA-05HC
Rated voltage	DC5 V	
Voltage range	4.5 ~ 5.5 V	
Rated current	0.03 A	0.06 A
Rotating speed	8000 min <sup>-1</sup>	11000 min <sup>-1</sup>
Air flow	0.015 m³/min	0.018 m³/min
Static pressure	10.0 Pa	17.0 Pa
Noise	7 dB (A)	15 dB (A)
Net weight	Approx. 2.3 g	

 $<sup>\</sup>fint \figures$  Figures in the table are typical values under rated operating condition.

#### ■AIR FLOW PERFORMANCE CURVES

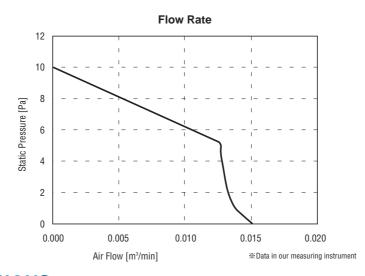

#### **IOUTLINE DIMENSIONS**

(Unit: mm)

