

"High Frequency Ceramic Solutions"

200 MHz EMI Filter Array

P/N 0200FA18A0200

Detail Specification: 02/05/04

Page 1 of 2

General Specifications

Part Number	0200FA18A0200
Cut Off Frequency (Mhz)	200
20 dB min. Attenuation (Mhz)	800 - 1200
10 dB min. Attenuation (Mhz)	1500 - 3000

Power Capacity	0.5 Watts max.
Impedance	50 Ω
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Reel Quantity	3,000

Mechanical Dimensions

	In	mm	
L	0.126 ± 0.008	3.20 ± 0.20	
W	0.063 ± 0.008	1.60 ± 0.20	
T	0.035 ± 0.008	0.90 ± 0.20	
a	0.014 ± 0.008	0.35 ± 0.20	
b	0.024 ± 0.006	0.60 ± 0.15	
c	0.012 +.004/-0.008	0.30 +0.1/-0.2	
p	0.031 ± 0.004	0.80 ± 0.10	
Unit: mm			

Terminal Configuration


No.	Function	No.	Function	No.	Function
1	IN1	5	GND	9	OUT1
2	IN2	6	OUT4	10	GND
3	IN3	7	OUT3		
4	IN4	8	OUT2		

Mounting Considerations

Mount these devices with brown mark facing up.

Line width should be designed to provide 50Ω impedance matching characteristics.

Units: mm

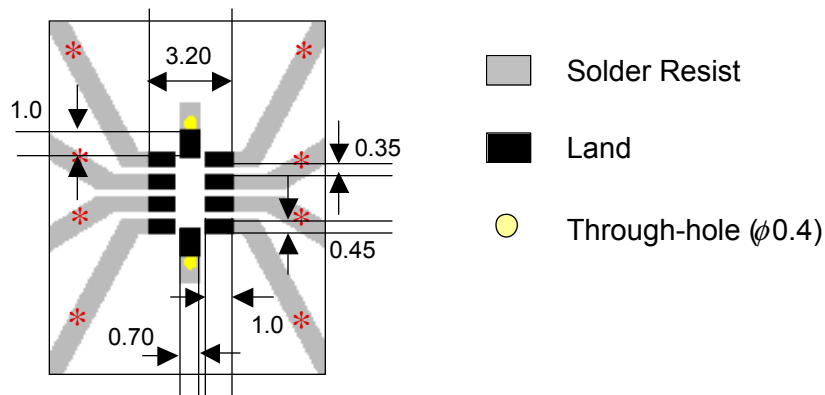

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

931 Via Alondra • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2003 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


200 MHz EMI Filter Array

P/N 0200FA18A0200

Detail Specification: 02/05/04

Page 2 of 2

Typical Electrical Performance (T=25°C)

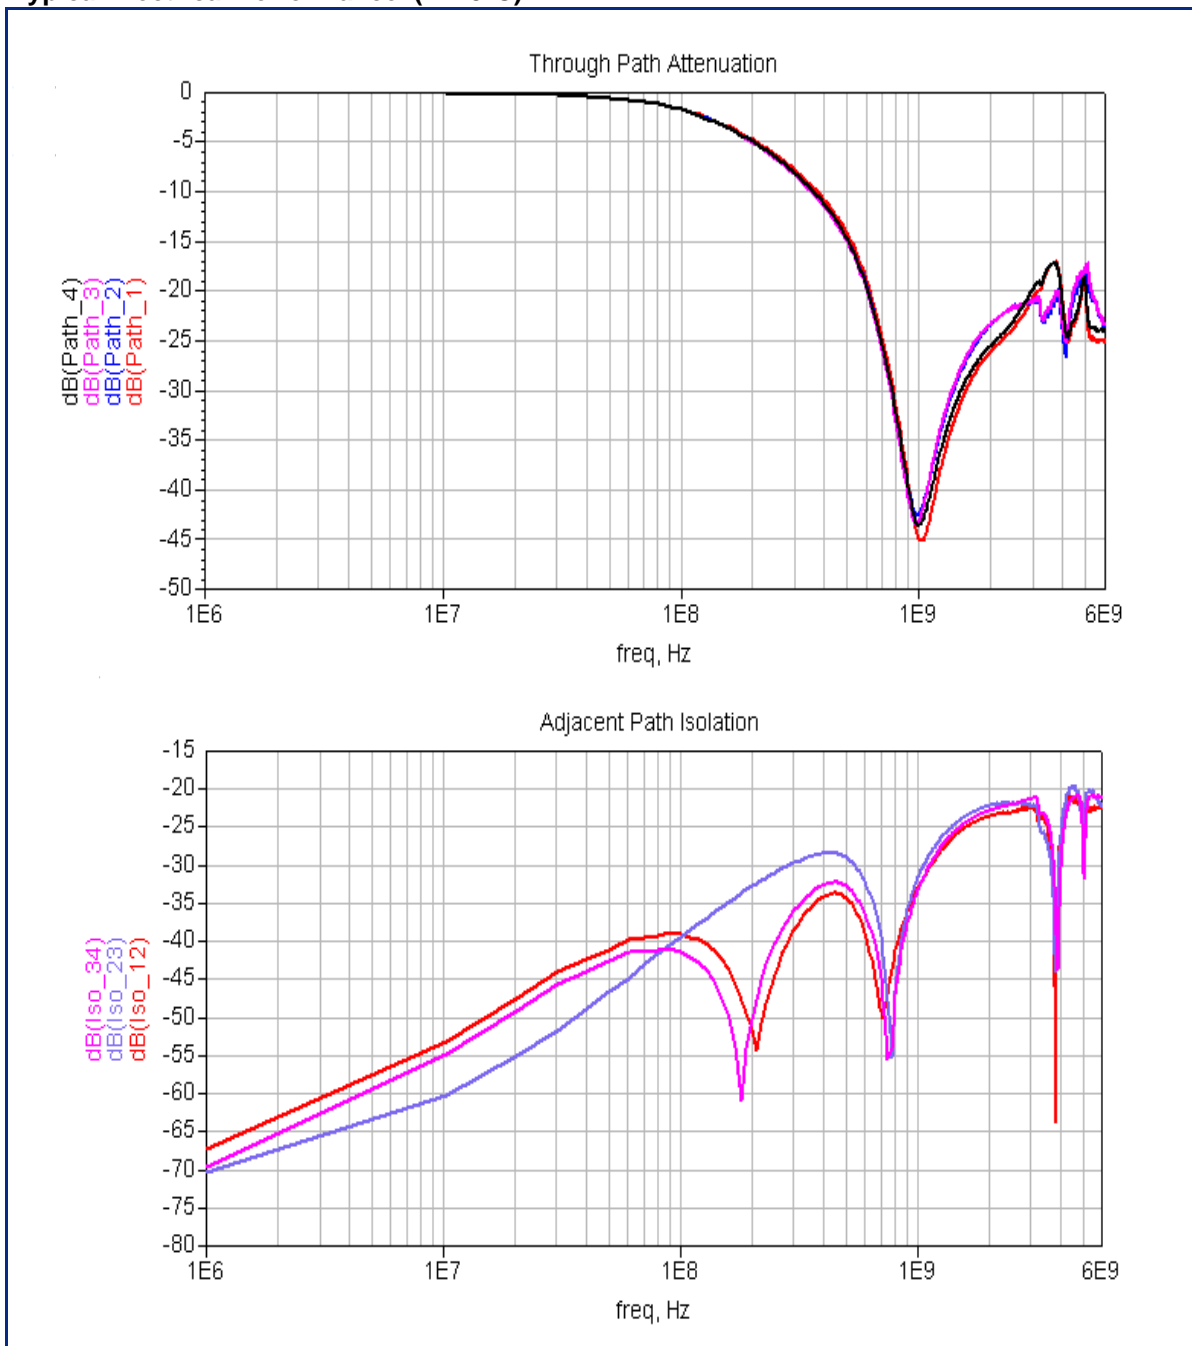

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

931 Via Alondra • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2003 Johanson Technology, Inc. All Rights Reserved