
REV. Status

REVISION 09/01/99 TS

Common Mode Coil

- A. Electrical Specifications (@25°C)
 - 1. Rated Voltage; 250VAC 50/60Hz
 - 2. Rated Current; 2A AC
 - 3. Common Mode Inductance (@ 1KHz); 3mH MIN
 - 4. DC Resistance; (each winding) $0.20\hat{\Omega}$ MAX
 - 6. Insulation Resistance; 100M $\!\Omega\!$ MIN at 500VDC Winding to Winding, Winding to Core
 - 7. HiPot test; AC 2.0KV 1 minute Winding to Winding, Winding to Core

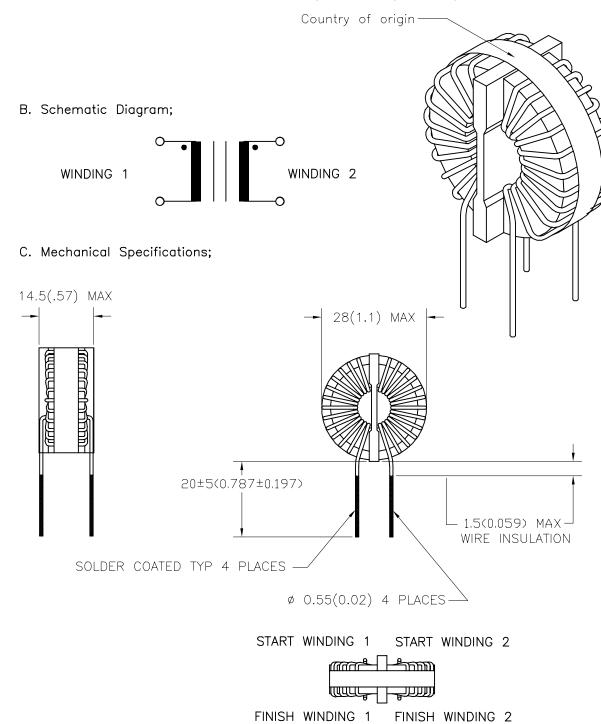

PREPARED BY:

D. Rund

ENGINEER: DWG CONTROL NO. REV P-A4-12223
T. Shiozawa ACAD\MISCX\A4122231.DWG - COMMON MODE

QUALITY CONTROL: CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 PRIOR NOTICE

DIM: mm(III

CMT-02203
MODEL SPECIFICATION

DIM: mm(In) SCL: 1/1 SH: 1 OF

D. Kelley
APPROVED:
D. Kelley

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.