
REV. Status REVISION -09/01/99 TS

Common Mode Coil

- A. Electrical Specifications (@25°C)
 - 1. Rated Voltage; 250VAC 50/60Hz
 - 2. Rated Current; 1A AC
 - 3. Common Mode Inductance (@ 1KHz); 7mH MIN
 - 4. DC Resistance; (each winding) 0.50Ω MAX
 - 6. Insulation Resistance; $100M\Omega$ MIN at 500VDC Winding to Winding, Winding to Core
 - 7. HiPot test; AC 2.0KV 1 minute Winding to Winding, Winding to Core

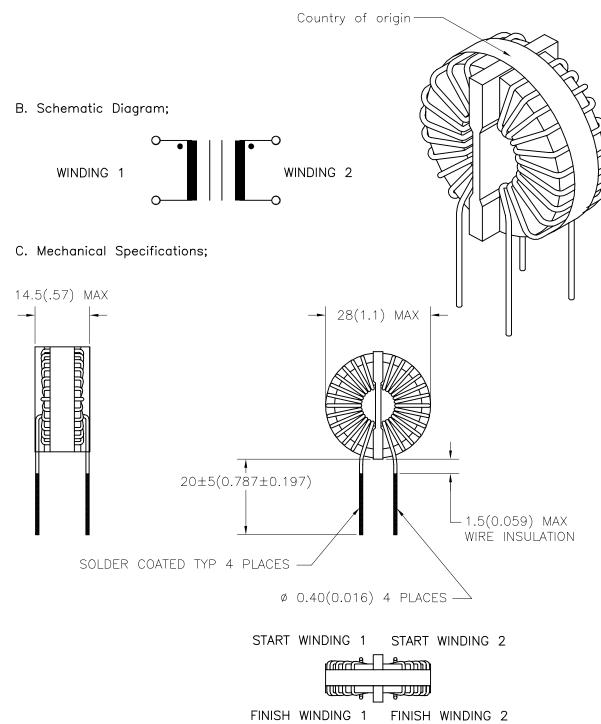

PREPARED BY:

D. Rund ENGINEER:

DWG CONTROL NO. REV COIL P-A4-12222

COMMON MODE CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE TAMURA CORPORATION OF AMERICA CMT-02107

MODEL SPECIFICATION

DIM: mm(In) SCL: 1/1

D. Kelley

T. Shiozawa QUALITY CONTROL:

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

ACAD\MISCX\A4122221.DWG