

REV. Status REVISION -8/30/99 TS

Common Mode Coil


- A. Electrical Specifications (@25°C)
  - 1. Rated Voltage; 250V AC 50/60Hz
  - 2. Rated Current; 3A AC
  - 3. Common Mode Inductance (@ 1KHz); 5mH MIN


  - 4. DC Resistance; (each winding)  $0.15\Omega$  MAX 6. Insulation Resistance;  $100M\Omega$  MIN at 500VDC Winding to Winding, Winding to Core
  - 7. HiPot test; AC 2.0KV 1 minute Winding to Winding, Winding to Core






C. Mechanical Specifications;

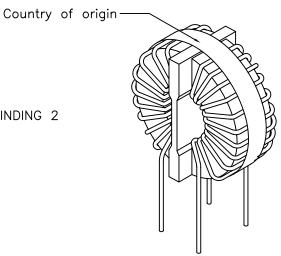

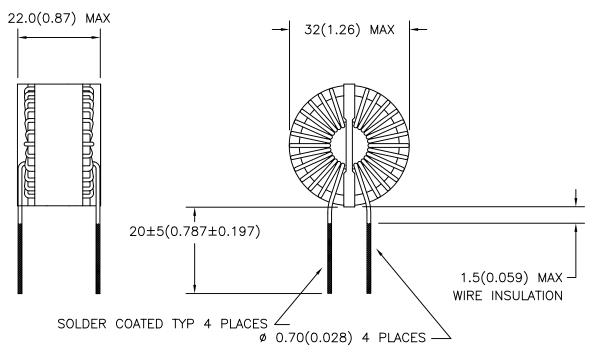

START WINDING 1 START WINDING 2



FINISH WINDING 1 FINISH WINDING 2

PREPARED BY:

D. Kelley

Rund **ENGINEER:** DWG CONTROL NO. REV COIL P-A4-12217 CMT-03305 COMMON MODE Shiozawa ACAD\MISCX\A41122171.DWG CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 QUALITY CONTROL: MODEL SPECIFICATION DIM: mm(In) SCL: 1/1 PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

Downloaded from Elcodis.com electronic components distributor