


# HZ1206C202R-10



**UNCONTROLLED DOCUMENT**

**PHYSICAL DIMENSIONS:**

A	3.20 [.126]	± 0.20 [.008]
B	1.60 [.063]	± 0.20 [.008]
C	1.10 [.043]	± 0.20 [.008]
D	0.51 [.020]	± 0.25 [.010]

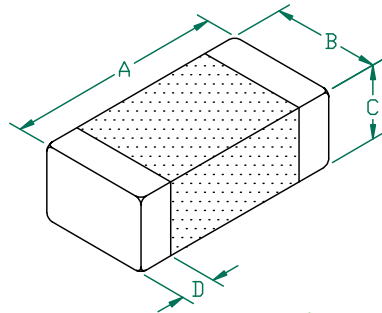


ELECTRICAL CHARACTERISTICS:			
Z @ 30MHz ( Ω )		DCR ( Ω )	Rated Current
Nominal	2000		
Minimum	1500		
Maximum	2500	0.50	300 mA

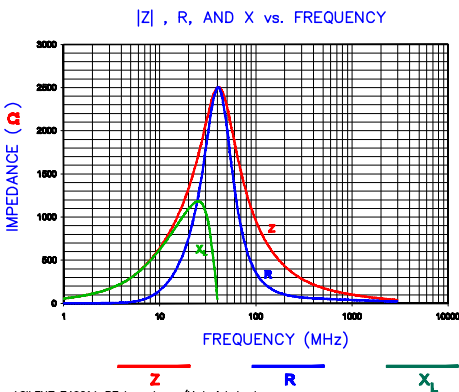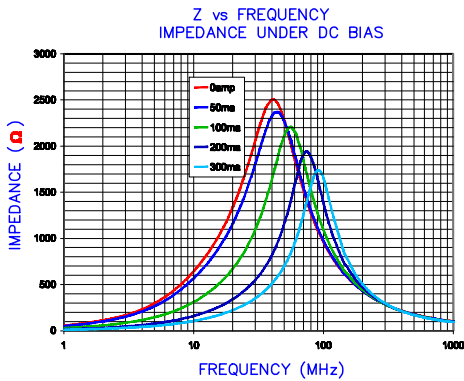


- NOTES: UNLESS OTHERWISE SPECIFIED
1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 3000 PCS/REEL.
  2. TERMINATION FINISH IS 100% TIN.
  3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

**LAND PATTERNS FOR REFLOW SOLDERING**



(For wave soldering, add 0.762 [.030] to this dimension)

**RECOMMENDED SOLDERING CONDITIONS**

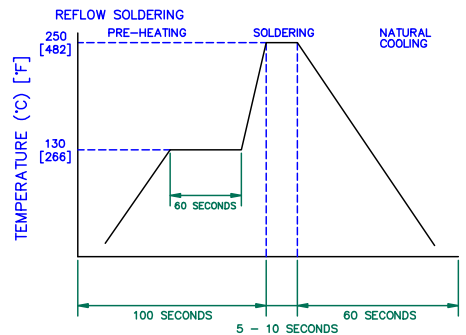

DIMENSIONS ARE IN mm [INCHES]		This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.	
		<b>Laird TECHNOLOGIES</b>	
PROJECT/PART NUMBER: HZ1206C202R-10		REV B	PART TYPE: CO-FIRE
DATE: 04/03/04		DRAWN BY: TMB	
SCALE: NTS	SHEET: 2 of 2		
REV A	DESCRIPTION ORIGINAL DRAFT	DATE 04/03/04	INT TMB
CAD # HZ1206C202R-10-B		TOOL # -	

AGILENT E4991A RF Impedance/Material Analyzer  
HP 16194A Test Fixture. TEST REF. 3228