


# LI0201B121R-10

**UNCONTROLLED DOCUMENT**



**PHYSICAL DIMENSIONS:**

A	0.60 [.024]	+	0.03 [.001]
B	0.30 [.012]	+	0.03 [.001]
C	0.30 [.012]	+	0.03 [.001]
D	0.15 [.006]	+	0.05 [.002]



**ELECTRICAL CHARACTERISTICS:**


Z @ 100MHz ( $\Omega$ )	DCR ( $\Omega$ )	Rated Current
Nominal	120	
Minimum	90	
Maximum	150	200 mA

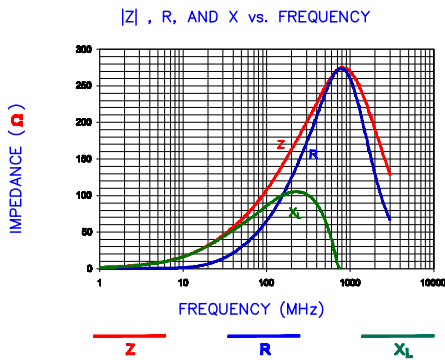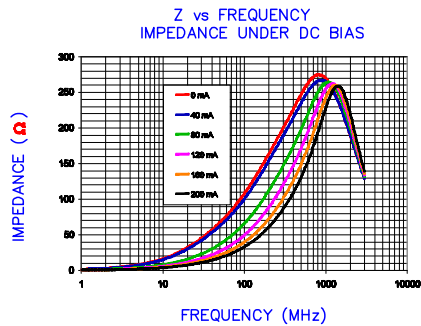


NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 15,000 PCS/REEL, PAPER TAPE.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

**LAND PATTERNS FOR REFLOW SOLDERING**

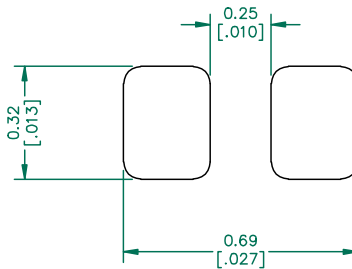

**RECOMMENDED SOLDERING CONDITIONS**

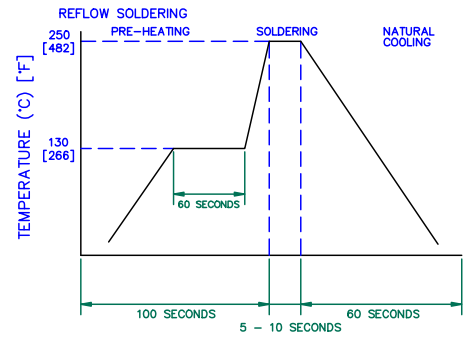

DIMENSIONS ARE IN mm [INCHES].

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.



PROJECT/PART NUMBER: <b>LI0201B121R-10</b>				REV: <b>C</b>	PART TYPE: <b>CO-FIRE</b>	DRAWN BY: <b>JRK</b>
<b>C</b>	CORRECT DCR VALUE ADD TEST REF.	09/04/08	JRK	DATE: 07/07/08	SCALE: NTS	SHEET: 2 of 2
<b>B</b>	ADD CURVES	08/20/08	JRK			
<b>A</b>	ORIGINAL DRAFT	07/07/08	JRK			
REV	DESCRIPTION	DATE	INT	CAD # LI0201B121R-10-C	TOOL # -	



AGILENT E4991A RF Impedance/Material Analyzer  
AGILENT 16196C Test Fixture. Test Ref. 6274