




SCALE DRAWING 1:1

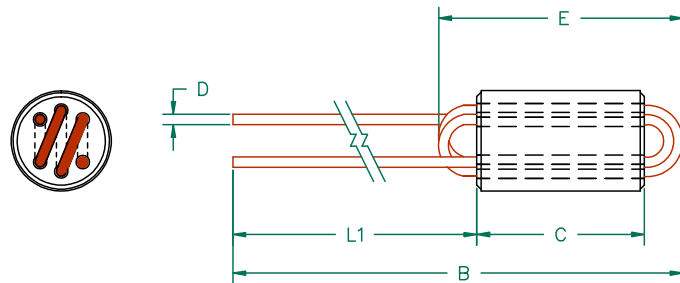

ELECTRICAL TESTING

TEST:	Z	Z
FREQUENCY	25 MHz	100 MHz
NOMINAL	605 Ω	998 Ω
MINIMUM	454 Ω	749 Ω
MAXIMUM	-	-

UNCONTROLLED DOCUMENT

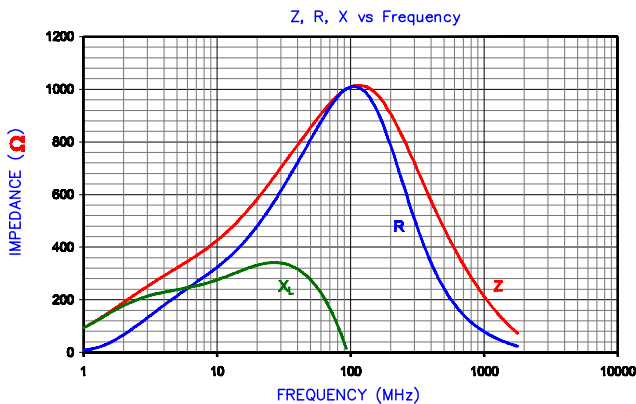

AGILENT E4991A RF Impedance/Material Analyzer
HP 16194A Test Fixture

NOTES:

1. WIRE: 3 TURNS, COPPER 24 AWG 0.51 [.020] DIA.
2. PLATING: 100% TIN $5\mu \pm 2\mu$ [200 $\mu\text{in} \pm 80\mu\text{in}$]
3. REF. STEWARD CORE P/N 28C0236-000.
4. LEADS:
A. LEADS SOLDERABILITY CONFORMS TO MIL-STD-202F, METHOD 208F.
5. WEIGHT/1000 1.22 kgs. 2.7 lbs.

DIMENSIONS:

A	6.00 [.236]	+	0.20 [.008]
B	50.53 [1.990]	+	3.18 [.125]
C	10.0 [.394]	+	0.25 [.010]
D	24 AWG TCW	+	-
E	14.61 [.575]	+	TYP.
L1	38.1 [1.50]	+	3.18 [.125]

DIMENSIONS ARE IN mm (INCHES).				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.	
K	UPDATE COMPANY LOGO	12/16/08	JRK	PROJECT/PART NUMBER: 28C0236-OEW-10	REV K
J	REMOVE MAX. Z SPEC @ 100 MHZ	04/26/07	JRK		
H	UPDATE COMPANY LOGO	04/16/07	JRK		
G	CHG A DIMS. & TOLS. ADD ROHS SYMB.	02/20/07	JRK		
F	CORRECT NOTE 5	07/07/05	JRK		
E	CHG P/N TO -10, REVISE NOTES 2&5	10/07/03	JRK		
D	UPDATE PRINT FORMAT, UPDATE TOLS ADD Z, R, XL CURVE, UPDATE NOTES	01/11/02	JRK	07/08/93	SCALE: -
C	UPDATE PRINT FORMAT	10/24/97	DTR	07/08/93	MATERIAL: NiZn Ferrite
REV	DESCRIPTION	DATE	INT	28C0236-OEW-10-K	TOOL # C0236



DRAWN BY: JAZ

PART TYPE: MULTI-TURN AXIAL BEAD

MATERIAL: NiZn Ferrite