


**Steward**

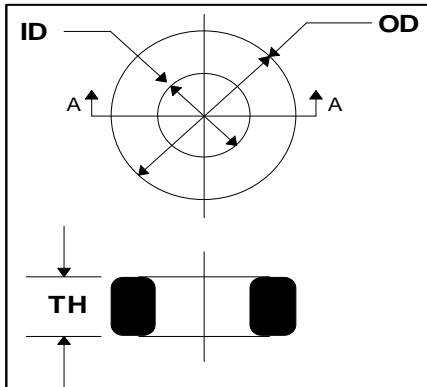

**CORE DIMENSIONS**

UNCOATED CORE		<b>35T0231-000</b>			
	MM	INCHES		MM	INCHES
OD	<b>5.84</b>	(.230)	±	.15	(.006)
ID	<b>3.05</b>	(.120)	±	.13	(.005)
TH	<b>1.52</b>	(.060)	±	.13	(.005)
SINGLE PARYLENE COATING		<b>35T0231-00P</b>			
OD	<b>5.87</b>	(.231)	±	.15	(.006)
ID	<b>3.02</b>	(.119)	±	.13	(.005)
TH	<b>1.55</b>	(.061)	±	.13	(.005)

WEIGHT / K 0.32 LBS  
 INITIAL PERMEABILITY **5000**

**ELECTRICAL SPECIFICATION**

	MIN (μH)	MIN TOL.	NOM (μH)	MAX (μH)	MAX TOL.	FREQ. (kHz)	VOLT. (V)	TURNS
L	.793	(-20%)	.991	1.190	(+20%)	100	≤ .00046	1
Q	10	-	-	-	-	100	≤ .00046	1

**COATING SPECIFICATIONS**

TYPE	Max. Coating (mils.)	Min. DLB VAC	TEST FORCE (LB)
PARYLENE	0.5	1000	0.30

NOTES:



Rev	Description	Date	INT
A	Original Draft	7/11/1995	JBE
B	REVISE PRINT	7/11/1995	JBE
C	UPDATE PRINT FORMAT	7/11/1995	JBE
D	TRANSFER TO LOTUS NOTES	11/19/1997	IS
E	RE-ACTIVATE PRINT REMOVE Q SPECS CHANGE PART NUMBER	10/5/2005	JRK
F	Revised Template	6/1/2006	WMM

Date: 6/1/2006	DWG # 35T0231-00P-F	Rev:
Drawn By: WMM	Title # 35T0231-00P	F

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

**UNCONTROLLED DOCUMENT**