


CHAMFER
DETAIL A
(N.T.S.)

**UNCONTROLLED
DOCUMENT**

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	149 Ω	287 Ω	406 Ω
Minimum	- Ω	230 Ω	- Ω

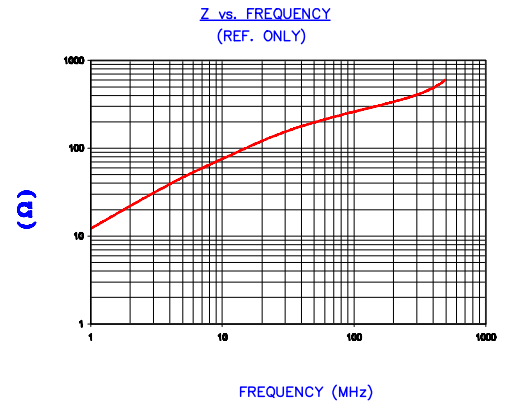


FERRITE CORE DIMENSIONS (SPEC): mm [in]



A	14.27 [.562]	±	0.25 [.010]
B	7.26 [.286]	±	0.15 [.006]
C	28.57 [1.125]	±	0.78 [.030]

WEIGHT/1000 16.75 kgs 36.92 lbs.

SCALE DRAWING 1:1



28B0563-200

DIMENSIONS ARE IN MM [INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
H	UPDATE MIN Z SPEC AND COMPANY LOGO	06/04/07	JRK	 			
G	CHANGE MIN Z SPEC @100MHZ	09/18/06	JRK				
F	UPDATE MIN Z SPEC @100 Mhz ADD REF #	03/05/04	JRK				
E	UPDATE FORMAT, Z SPECS ADD CURVE REM COATING SPECS, CHG P/N	05/23/03	JRK				
D	UPDATE PRINT FORMAT ADD DETAILS UPDATE WGT	03/01/02	JRK				
C	P/N WAS 200 ADD COATING SPECS	01/08/99	BAC	PROJECT/PART NUMBER:	REV	DRAWN BY:	
B	UPDATED P/N FOR NEW CATALOG	12/01/95	JBE	28B0563-200	H	DJB	
REV	DESCRIPTION	DATE	INT	DATE:	SCALE:	MATERIAL:	
				11/20/90	2 : 1	Ni Zn Ferrite	
				CAD #	TOOL #		
				28B0563-200-H	B0563		