


SECTION A-A


SEE DETAIL "A"



DETAIL "A"
CHAMFER
SCALE 6:1

UNCONTROLLED DOCUMENT

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	124 Ω	242 Ω	390 Ω
Minimum	- Ω	194 Ω	- Ω

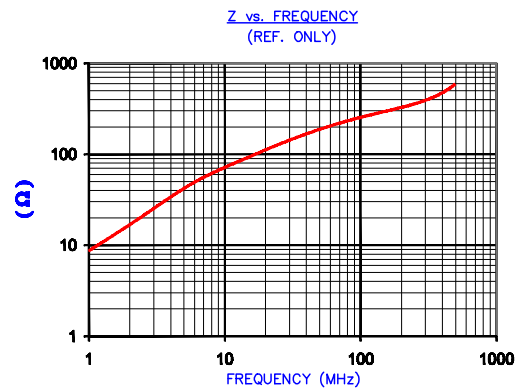


AGILENT E4991A Impedance/Material Analyzer
HP 16082A-Test Fixture REF 3148

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	17.42 [.686]	±	0.36 [.014]
B	9.53 [.375]	±	0.20 [.008]
C	28.58 [1.125]	±	0.76 [.030]

WEIGHT/1000 23.50 kgs [51.80 Lbs]

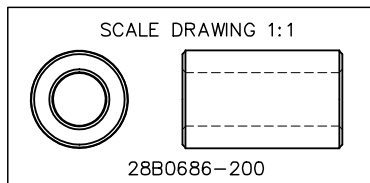

DIMENSIONS ARE IN mm [INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
K	UPDATE Z SPEC AND COMPANY LOGO	06/12/07	JRK				
J	UPDATE Z SPEC @100MHz MIN	09/22/06	JRK				
H	UPDATE Z SPEC @100MHz ADD REF #	06/17/04	TMB				
G	CHANGE PRINT FORMAT, Z SPEC FORMAT & P/N TO -200 REMOVE COATING DIMS	05/23/03	TMB				
F	UPDATE PRINT FORMAT FOR ELECTRONIC DBASE ADD DETAIL "A" REV. WEIGHT/K	02/19/01	TMB				
E	UPDATED Z SPECS	04/17/97	BAC	PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
D	UPDATE P/N PRINT	04/22/96	BAC	28B0686-200	K	FERRITE CORE	DJB
C	CHANGE ELECT. SPECS FOR CATALOG	02/23/96	BAC	DATE:	SCALE:	MATERIAL:	
REV	DESCRIPTION	DATE	INT	07/03/90	2 : 1	NiZn Ferrite	
				CAD #	TOOL #		
				28B0686-200-K	B0686		