


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	100 Ω	280 Ω	590 Ω
Minimum	- Ω	224 Ω	- Ω

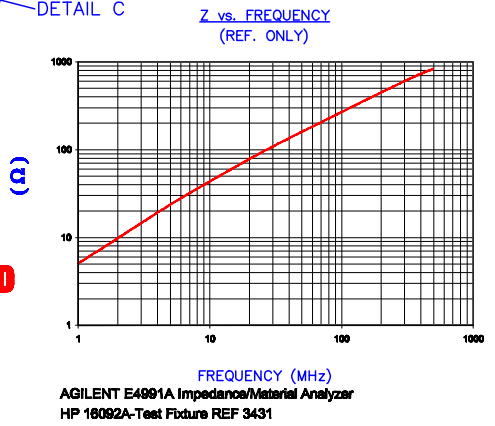

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	63.50 [2.500]	+ 1.27 [.050]
B	52.07 [2.050]	+ 1.02 [.040]
C	28.58 [1.125]	+ 0.64 [.025]
D	6.35 [.250]	+ 0.25 [.010]
E	0.84 [.033]	+ 0.25 [.010]
F	7.62 [.300]	+ 0.18 [.007]
G	31.75 [1.250]	+ 0.76 [.030]
H	2.74 [.108]	+ 0.25 [.010]
J	1.02 [.040]	+ 0.25 [.010]

WEIGHT/1000 50.13 kgs 110.53 Lbs

NOTES:

1. ADD ONE METAL CLIP FOR SHIPPING.
2. METAL CLIP SPECIFICATION: ASSE017-2.
3. INCLUDES ONE CORE AND ONE CLIP.
4. PART WEIGHT IS FOR ONE CORE.
5. USE FERRITE CORE STEWARD P/N 28S2001-000.

DIMENSIONS ARE IN mm[INCHES]				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
G	UPDATE NOTES ADD TEST REF NUMBER	08/11/05	JRK				
F	UPDATE FORMAT & Z SPECS REMOVE NOTE 1 ADD Z CURVE	07/09/03	JRK				
E	ADD NOTE # 3	01/23/02	JRK				
D	UPDATE PRINT FORMAT ADD DETAILS, UPDATE Z SPECS	09/28/01	JRK				
C	UPDATE P/N FOR NEW CATALOG	09/27/95	JBE				
B	UPDATE	11/02/94	JBE	PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
A	ORIGINAL DRAFT	11/02/94	JBE	28S2001-0M0	G	ONZ SPLIT FERRITE CORE	JBE
REV	DESCRIPTION	DATE	INT	DATE:	SCALE:	MATERIAL:	
				11/02/94	1.5 : 1	NiZnFERRITE	
				CAD #	TOOL #		
				28S2001-0M0-G	S2001		