


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	100 Ω	280 Ω	600 Ω
Minimum	- Ω	224 Ω	- Ω

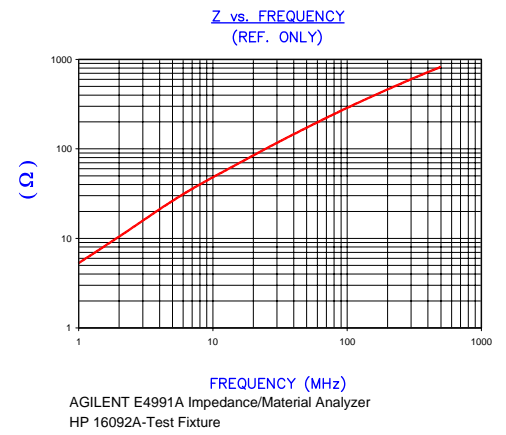

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	76.20 [3.000]	+	1.52 [.060]
B	65.28 [2.570]	+	1.27 [.050]
C	28.58 [1.125]	+	0.64 [.025]
D	6.35 [.250]	+	0.25 [.010]
E	0.84 [.033]	+	0.25 [.010]
F	7.62 [.300]	+	0.18 [.007]

WEIGHT/1000 52.16 kgs\_115\_Lbs\_

**UNCONTROLLED DOCUMENT**

NOTES:

1. REFERENCE STEWARD CORE P/N 28S2011-000.
2. ADD METAL CLIPS FOR SHIPPING P/N ASSE017-2.

DIMENSIONS ARE IN mm[INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
				<b>Steward</b>			
PROJECT/PART NUMBER:		REV	PART TYPE:	DRAWN BY:			
28S2011-0M0		B	CNZ SPLIT FERRITE CORE	JRK			
REV	DESCRIPTION	DATE	INT	DATE:	SCALE:	MATERIAL:	
B	UPDATE FORMAT & Z SPECS ADD CURVE	07/08/03	JRK	02/01/02	1.5 : 1		
A	ORIGINAL DRAFT	02/01/02	JRK	CAD #	TOOL #		
				28S2011-0M0-B	S2011		STEWARD 28