



CORE DIMENSIONS:

A	20.50 [.807]	±	0.30 [.012]
B	9.85 [.388]	±	0.15 [.006]
C	37.50 [1.476]	±	0.55 [.022]
D	9.55 [.376]	±	0.15 [.006]





IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	160 Ω	348 Ω	514 Ω
Minimum	- Ω	278 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

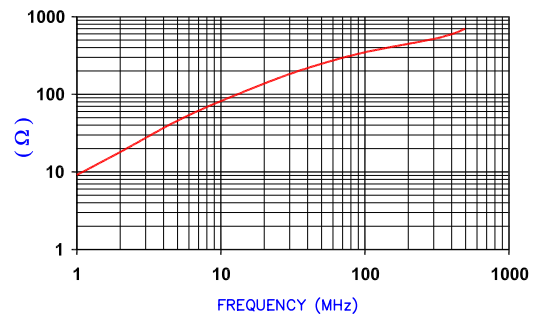

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture. TEST REF. 5452



CASE DIMENSIONS:

A	24.82 [.977]	±	Ref.
B	10.00 [.394]	±	Ref.
C	55.91 [2.201]	±	Ref.
D	-	±	-
E	6.50 [.256]	±	Ref.

UNCONTROLLED DOCUMENT

NOTES:

1. ASSEMBLED PART #: 28A0807-0A2
2. CASE COLOR: BLACK-0A2.
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CASE MATERIAL: Halogen Free Nylon

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.	
E	UPDATED NOTE 3	09/15/10	JUN	PROJECT/PART NUMBER:	28A0807-0A2
D	UPDATE COMPANY LOGO ADD NOTES 3 AND 4	01/26/09	JRK	REV	E
C	UPDATE 100MHz MINIMUM VALUE	07/16/07	TMB	PART TYPE:	FERRITE SNAP-ON
B	UPDATE COMPANY LOGO	04/18/07	TMB	DRAWN BY:	TMB
A	ORIGINAL DRAFT	11/01/06	TMB	DATE:	11/01/06
REV	DESCRIPTION	DATE	INT	CAD #	28A0807-0A2-E
				SCALE:	1:1
				MATERIAL:	NiZn Ferrite
				TOOL #	-

