
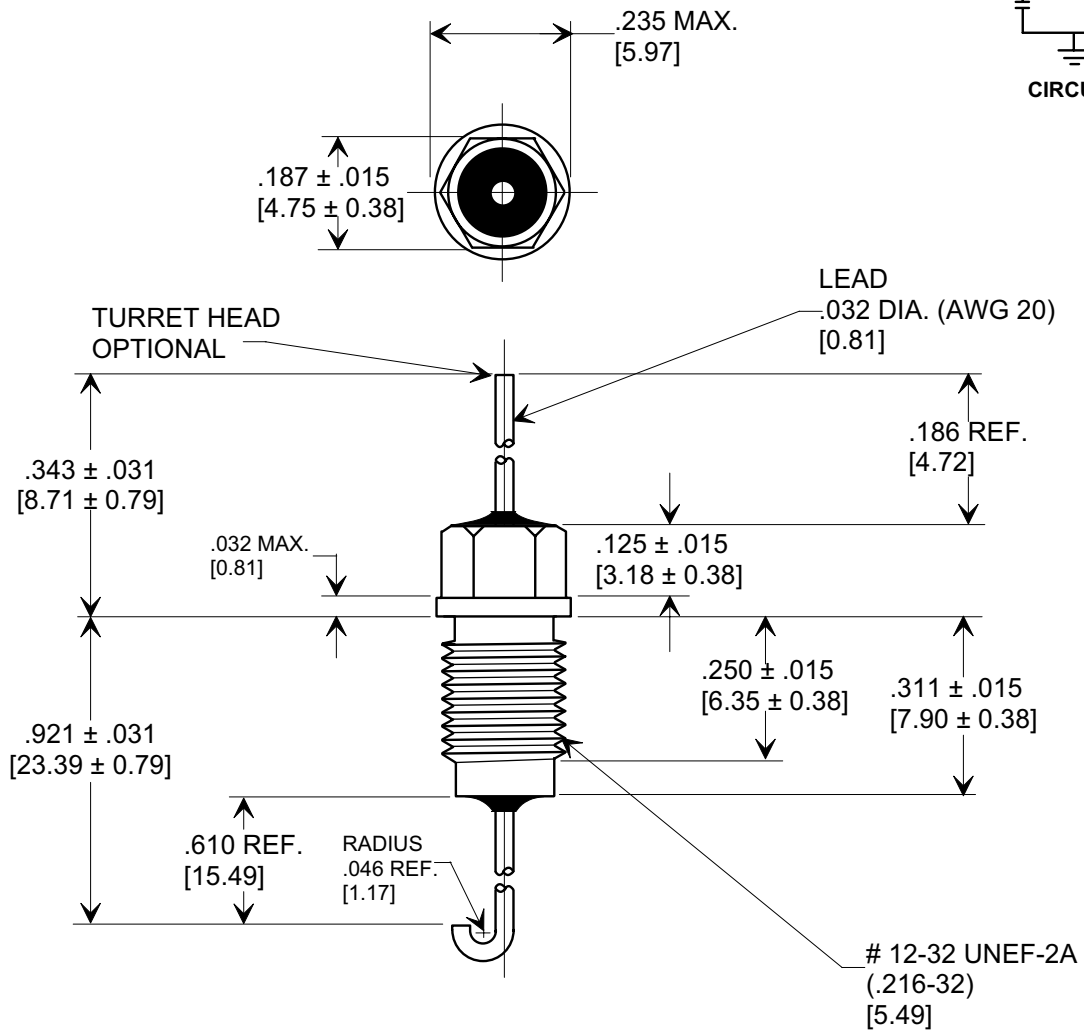



MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



| MIN. CAP. | + 125 °C WORKING VOLTAGE | I.R. MIN. @ 100 VDC | DWV | CURRENT | MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220 | | | | |
|-----------|--------------------------|---------------------|---------|---------|---|--------|--------|-------|--------|
| | | | | | 5 MHz | 20 MHz | 50 MHz | 1 GHz | 10 GHz |
| 25,000 pF | 100 VDC | 10 GΩ | 250 VDC | 10 A | 15 | 60 | 60 | 65 | 65 |

| | | | | | | | |
|---------------------------------|--------------------------|-------------------------------|--------------------------------------|-----------------------------------|--|-------------------------------------|------------------------|
| X-2015 Rev-0 | REVISION RECORD | | | | --TOLERANCES-- Unless Otherwise Specified | Title | |
| | Original Release C.O. | WAS SK 7096-003-S EC. 6-14-93 | 0 | 930528-2 | | EMI FILTER MIL 15733/61-0012 | |
| | DWG. REVISED EC. 5-25-94 | 1 | 940217-3 | NAILHEAD RMVD. 5-1-96 | DECIMAL ± // // | Drawn L.E. 06-03-02 | Scale 3 X |
| | 2 | 960409-5 | RDN TO COMPUTER FORMAT L.E. 06-03-02 | 3 | 20020528-3-05 | ANGLES ± // // | Approved T.C. 06-03-02 |
| REVISED DIM .610. S.M. 08-30-05 | 4 | 20020529-3-01 | | TUSONIX TUCSON, ARIZONA | A | 4253-501 | |