

**SAFETY ORGANIZATION(S):**

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED                   UL 1283  
 CSA CERTIFIED                CSA 22.2, NO.0,0.4,8  
 VDE APPROVED                 VDE 565-3  
 SEV APPROVED                 SEV 1055/TP1977/5.1.1

**OPERATING SPECIFICATIONS:**

LINE VOLTAGE/CURRENT: 10 AMP, 120/250 VAC  
                                   8 AMP./40°C, 250 VAC  
 LINE FREQUENCY: 50-60Hz  
 MAX. CASE RISE @ RATED CURRENT: 40°C  
 MAX. LEAKAGE CURRENT, EACH: .25 mA AT 120V 60Hz  
 LINE TO GROUND: .4 mA at 250V 50Hz  
 OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, I<sub>r</sub>  
 IN AN AMBIENT, T<sub>a</sub>, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I<sub>o</sub>, IS AS FOLLOWS:

$$I_o = I_r \sqrt{\frac{85 - T_a}{45}}$$

**RELIABILITY SPECIFICATIONS:**

STORAGE TEMPERATURE: -40°C TO +85°C  
 HUMIDITY: 21 DAYS @ 40°C 95% RH  
 CURRENT OVERLOAD TEST: 6 TIMES RATED CURRENT FOR 8 SECONDS

**TEST SPECIFICATIONS:**

INDUCTANCE: 14.26 mH NOMINAL  
 CAPACITANCE: (MEASURED @ 1 KHz, 0.25VAC MAX., 25°C±1°C)  
 LINE TO GROUND: .0056µF ±20%  
 LINE TO LINE: .811µF ±20%  
 DISCHARGE RESISTOR: 330KΩ

LINE/GROUND AND LINE/LINE INSULATION RESISTANCE:  
 6000MΩ (MIN) AT 100VDC, 20°C AND 50% RH.


**RECOMMENDED RECEIVING INSPECTION HIPOT:**

LINES TO GROUND: 2250 VDC FOR 1 MINUTE  
 LINE TO LINE: 1450 VDC FOR 1 MINUTE

**FILTER APPROVAL:**

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

.250 X .187 SLOT  
 EITHER OR BOTH ENDS  
 AND/OR  
 0.187±.010DIA  
 (2)

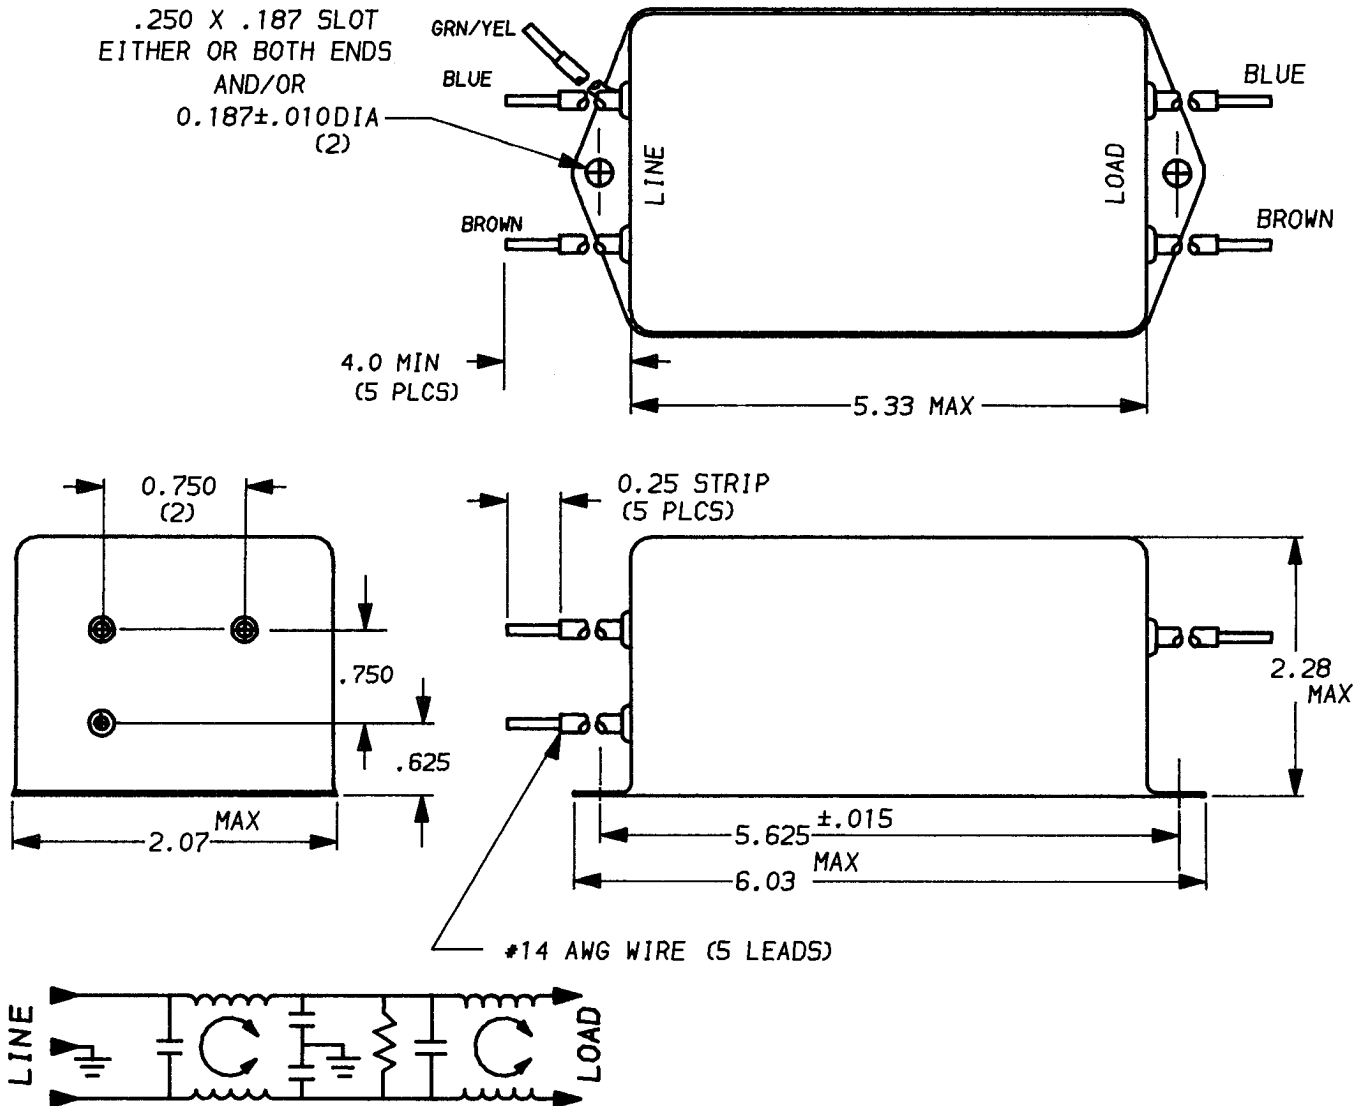

50Ω - 50Ω (MINIMUM) INSERTION LOSS

FREQUENCY MHz	.01	.04	.05	.06	.15	.5	5.0	10	20	30	/	/
COMMON dB	1	1	10	18	58	65	65	60	38	25	/	/
DIFF. dB	1	2	3	3	30	65	65	65	35	35	/	/

UNLESS OTHERWISE SPECIFIED, TOLERANCE TO BE ±.025  
 MATERIAL & FINISH: AS SUPPLIED  
 This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM'S prior written consent.

**corcom**  
 LIBERTYVILLE, IL 60048  
**POWER LINE FILTER**  
 DATE: 12-13-94 CATALOG NO.  
 APPROV. *MM* **10EP3.06**  
 CAD NO. **10EP3.06**

ECN #11131