

C. J. [Signature] / 10-15-92
 APPROVED BY/DATE
 REV. 2

SAFETY ORGANIZATION(S):
 THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET.

UL RECOGNIZED
 CSA CERTIFIED
 VDE APPROVED
 UL 1283
 CSA 22.2, NO. 0, 0, 4, 8
 VDE 565-3

OPERATING SPECIFICATIONS:
 LINE VOLTAGE/CURRENT:

10 AMP., 120/250 VAC
 8 AMP./40°C, 250VAC
 50-60Hz
 1.25mA @ 120V 60Hz
 2.10mA @ 250V 50Hz
 -10°C TO +40°C @ RATED CURRENT, I_R

IN AN AMBIENT, T_a, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_o, IS AS FOLLOWS:

$$I_o = I_r \sqrt{\frac{95 - T_a}{45}}$$

RELIABILITY SPECIFICATIONS:
 STORAGE TEMPERATURE:
 HUMIDITY,
 CURRENT OVERLOAD TEST:
TEST SPECIFICATIONS:
 INDUCTANCE:
 CAPACITANCE, MEASURED @ 1 KHz, 0.25 VAC MAX., 25°C ±1°C
 LINE TO GROUND,
 LINE TO LINE,
 DISCHARGE RESISTOR,
 LINE/GROUND AND LINE/LINE
 INSULATION RESISTANCE
 (W/O DISCHARGE RESISTOR)

1.7.83 mH NOMINAL
 N 7.89 mH NOMINAL
 .0155µF ±20%
 1.15 µF ±20%
 270KΩ
 5000 MΩ (MIN) AT 100 VDC
 20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOUT:
 LINES TO GROUND,
 LINE TO LINE,
 2250 VDC FOR 1 MINUTE
 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:
 THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

TOLERANCE EXCEPT AS NOTED
 DECIMAL, .XXX .XX .X
 ANGLES
 METRIC, ± .025 ± .1°




MATERIAL:
 AS SUPPLIED

FINISH:



POWER LINE FILTER

SCALE: NTS DATE: 8-5-90 DSCG. NO.:
 50% OF CFM ORIGINAL 10VN1.02
 50% OF CFM REV.

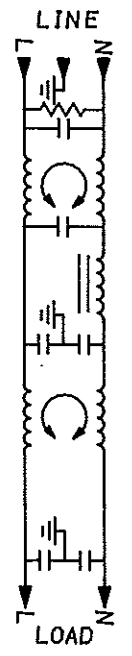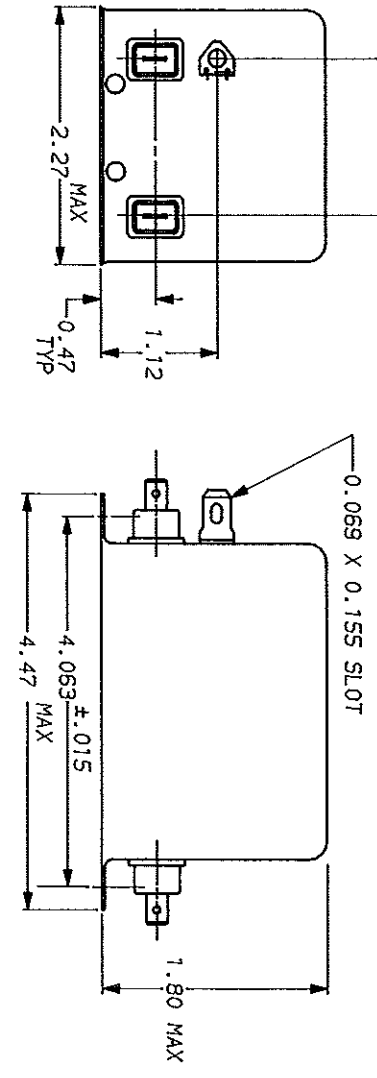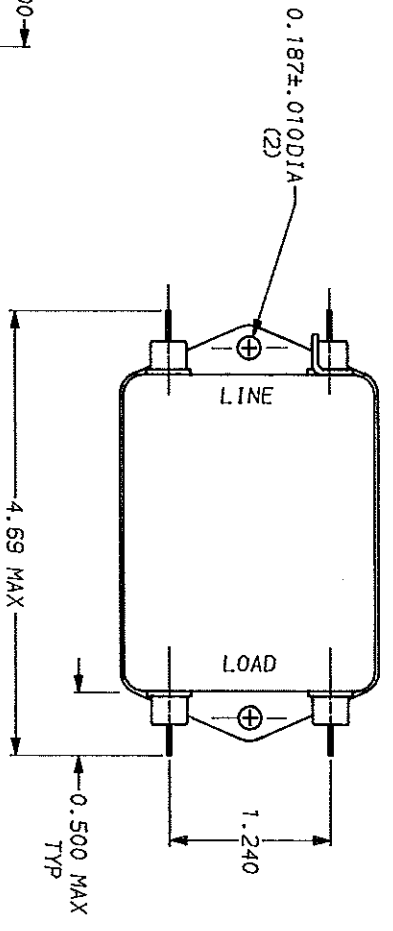

50p - 50p (MINIMUM) INSERTION LOSS

FREQUENCY MHZ	01	03	04	05	1	15	5	10	20	30	
COMMON dB	8	8	8	8	44	55	75	70	70	60	55
DIFF. dB	8	8	8	8	35	45	72	70	72	75	70

This document is property to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.