


SHEET 1 OF 1

ECN #	APPRVD.	DATE	REV.
/			

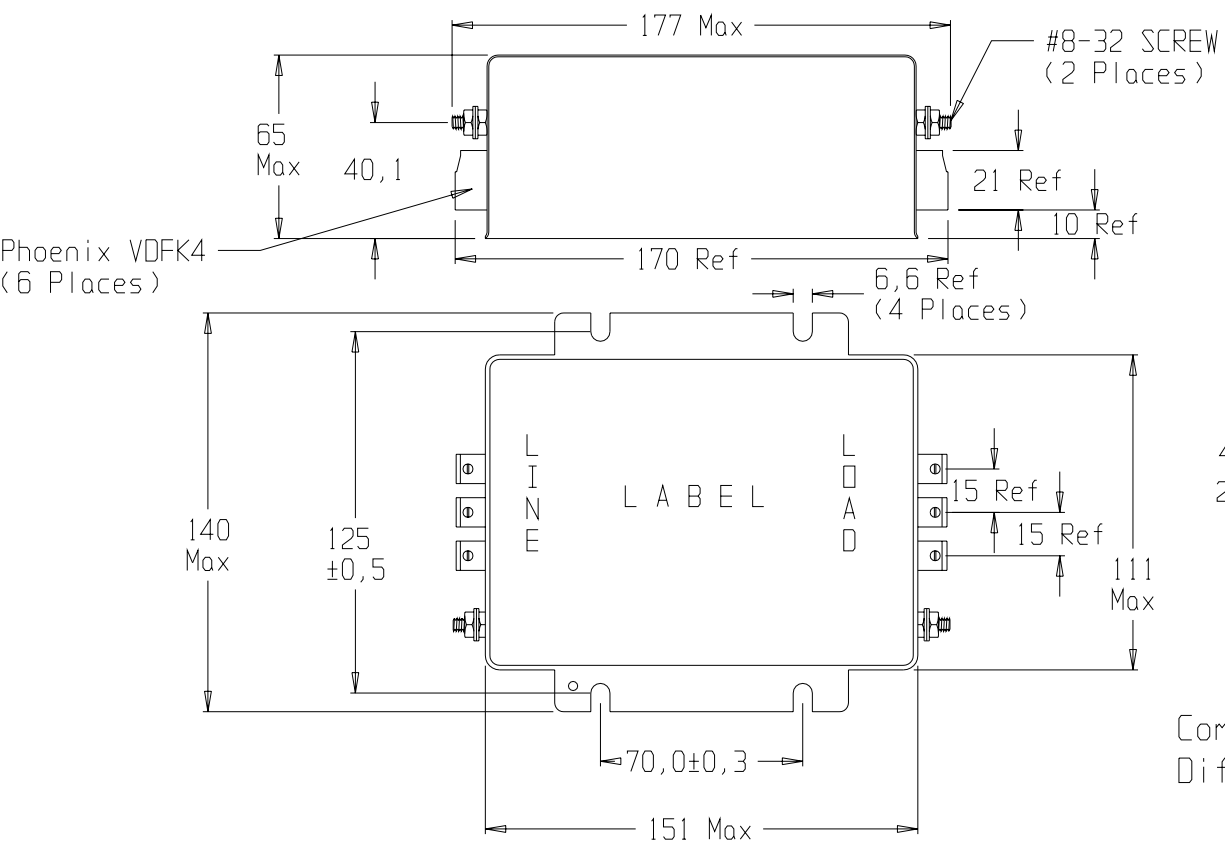


SPECIFICATION

12Amp /40°C 50-60Hz  
 440VAC Phase to Phase  
 250VAC Phase to Neutral/Gnd

ATTENUATION


Comm.Mode - 70dBµV at 100kHz  
 Dif.Mode - 70dBµV at 100kHz

EQUIVALENT SCHEMATIC MEASURED AT 1kHz

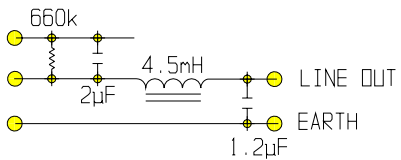

Max. Leakage current at 10% unsymmetrical mains, each Line to Ground:

2,3mA at 120V 60Hz  
 4,0mA at 250V 50Hz



This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM'S order or prior written consent.



RFI FILTER

CAD FILE:	cde\prt\cd\F7739		
SCALE:	.45:1	DATE:	2-12-96
DRW. BY:	MS	ORIG:	MS
		DRG. NO.	12FCD10
		REV.	00