

XDSL SPLITTER FILTER MODULE




- POTS Central Office Splitter for standard ADSL applications
- Complies with option A of ETSI specification TS 101-952-1-1
- Part of a standard series which has footprint compatibility
- ADSL2+ compatible
- Low profile version of B8049: 12.5 mm height
- NL version: RoHS-6 compliant

Electrical Specifications @ 25°C

PARAMETER	FREQUENCY	
POTS Impedance	100Hz to 4kHz	270Ω + 750Ω / 150nF
POTS Insertion Loss	1kHz	-1.0dB MAX
POTS Insertion Loss Distortion relative to 1 kHz	200Hz to 4kHz	-1.0dB MAX
	300Hz to 2kHz	-14dB MIN
POTS Return Loss	2kHz to 3.4kHz	-12dB MIN
	3.4kHz to 4kHz	-8dB MIN
POTS Group Delay	200Hz to 4kHz	200μs MAX
	100Hz to 4kHz	-46dB MIN
Longitudinal Balance	4kHz to 30kHz	-25dB MIN
	30kHz to 1.1MHz	-45dB MIN
	1.1MHz to 3.0MHz	-30dB MIN
	3.0MHz to 5.0MHz	-20dB MIN
ADSL Insertion Loss	32kHz to 2.2MHz	-55dB MIN
DC Current		100mA MAX
Total DC Resistance		40Ω MAX
Line Side Impedance	40kHz to 2.2MHz	1.0kΩ MIN


Mechanical

B8049E/ B8049ENL

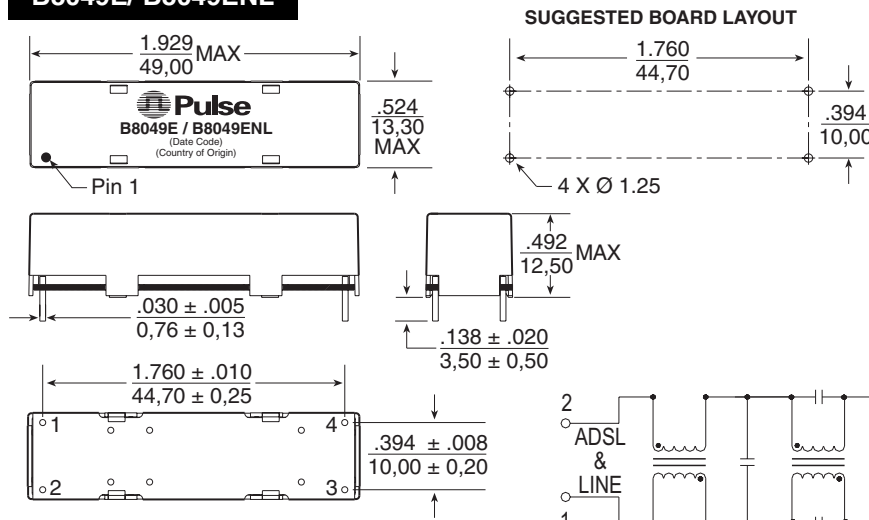

Weight11 grams
 Tray35/tray
 Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Unless otherwise specified,
 all tolerances are $\pm \frac{.010}{0,25}$

Schematic



For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
 San Diego, CA 92128
 U.S.A.
www.pulseeng.com

Tel: 858 674 8100
 Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
 D-71083 Herrenberg
 Germany

Tel: 49 7032 7806 0
 Fax: 49 7032 7806 12

Pulse China Headquarters

B402, Shenzhen
 Tech-Innovation International
 Tenth Kejian Rd.
 High-Tech Industrial Park
 Nanshan District, Shenzhen
 China

Tel: 86 755 33966678
 Fax: 86 755 33966700

Pulse North China

Room 1503
 XinYin Building
 No. 888 YiShan Rd.
 Shanghai 200233
 China

Tel: 86 21 54643211/2
 Fax: 86 21 54643210

Pulse South Asia

150 Kampong Ampat
 #07-01/02
 KA Centre
 Singapore 368324

Tel: 65 6287 8998
 Fax: 65 6280 0080

Pulse North Asia

No. 26
 Kao Ching Rd.
 Yang Mei Chen
 Taoyuan Hsien
 Taiwan, R. O. C.

Tel: 886 3 4641811
 Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2007. Pulse Engineering, Inc. All rights reserved.

www.pulseeng.com

B882.E (8/07)