

RTCN SERIES

Filter Exclusively for Secondary Side Three-Phase Inverter with Many Current Variations




FEATURES

- 6 to 300A wide range lineup.
- Small due to L1, light and thin.
- Low-profile design.
- Self-tightening screws and an open/close type cover make wiring work easier.
- Terminal block cover included for safety.
- Compliant with RoHS directives.


SAFETY STANDARDS

UL1283	File No. E62388 (UP to 150A)
EN60939	Licence Ref. No. SE/07115-5 (Up to 60A)
	SE/07115-4 (80A to)

PRODUCT IDENTIFICATION

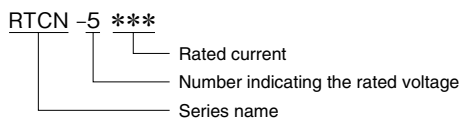

CIRCUIT DIAGRAM

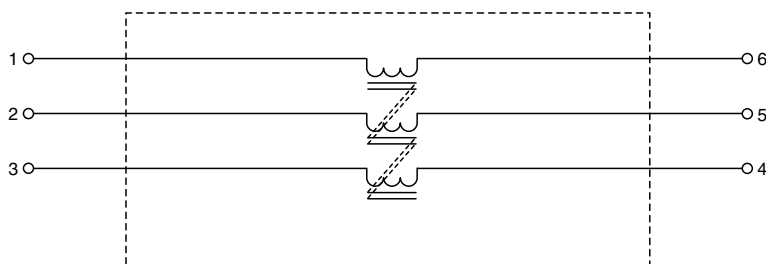


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

ELECTRICAL CHARACTERISTICS


Part No.	Rated voltage (AC/DC)	Rated current (AC/DC)	Withstand voltage	Insulation resistance	Leakage current	Operating temperature range	With derating over	DC resistance (mΩ)	Attenuation frequency range (MHz)	
									Common mode	
									at 10dB	at 5dB
RTCN-5006	500V	6A	AC.2500V 60s [Between line to ground]	100MΩ min. [DC.500V/ 1min.]	-	-25 to +85°C	50°C	145 max.	0.1 to 5	-
RTCN-5010		10A						60 max.	0.1 to 5	-
RTCN-5020		20A						25 max.	0.1 to 5	-
RTCN-5030		30A						13 max.	0.2 to 4	-
RTCN-5040		40A						10 max.	0.2 to 3	-
RTCN-5050		50A						7 max.	-	0.2 to 3
RTCN-5060		60A						5 max.	-	0.2 to 3
RTCN-5080		80A						5 max.	-	0.1 to 3
RTCN-5100		100A						4 max.	-	0.1 to 3
RTCN-5150		150A						3 max.	-	0.1 to 3
RTCN-5200		200A						4 max.	-	-
RTCN-5250		250A						3 max.	-	-
RTCN-5300		300A						2 max.	-	-

DERATINGS

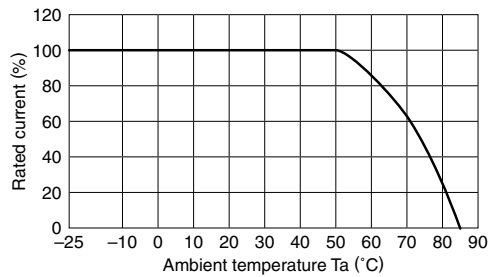


■ SHAPES AND DIMENSIONS


RTCN-5006/5010

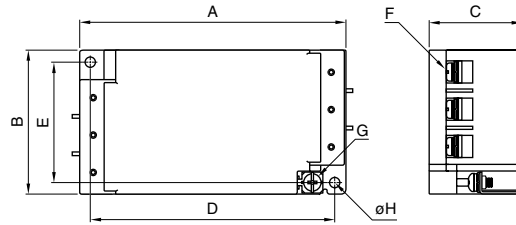

RTCN-5020/5030/5040/5050/5060

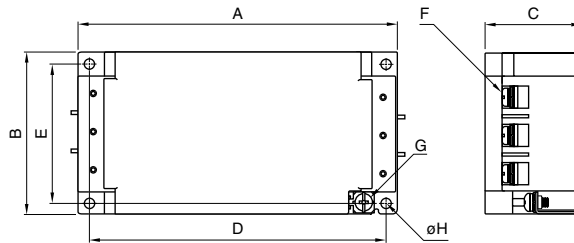

RTCN-5080/5100/5150/5200/5250/5300

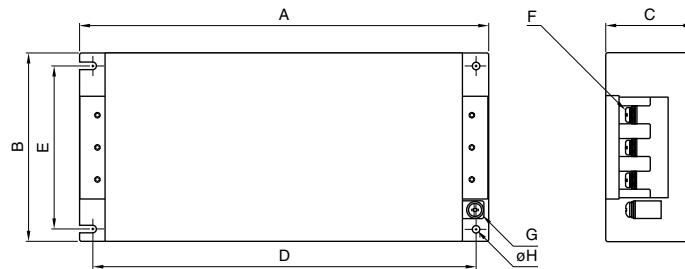


Dimensions in mm


Part No.	A	B	C	D	E	F	G	øH	Recommended clamping torque
RTCN-5006	120	63	42	110	53	M4	M4	4.5	M4 : 1.27N · m M5 : 2.5N · m M6 : 4.8N · m M8 : 7.64N · m M10 : 11.8N · m
RTCN-5010									
RTCN-5020	140	70	42	130	60	M4	M4		
RTCN-5030									
RTCN-5040									
RTCN-5050	170	90	54	160	80	M5	M4		
RTCN-5060									
RTCN-5080	267	161	85	247	135	M8	M6	6.5	
RTCN-5100									
RTCN-5150	290	190	88	270	164	M8	M6	6.5	
RTCN-5200									
RTCN-5250	390	195	103	370	169	M10	M8	6.5	
RTCN-5300									

■ ATTENUATION vs. FREQUENCY CHARACTERISTICS


RTCN-5006

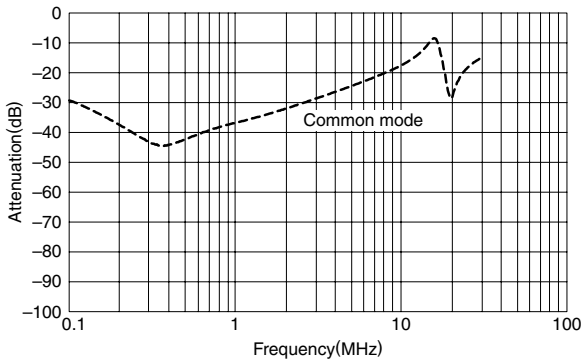


RTCN-5010

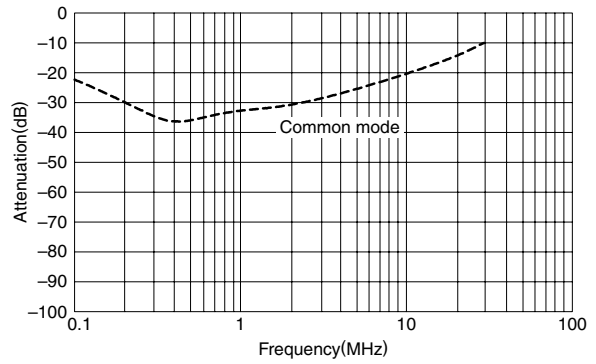


RTCN-5020

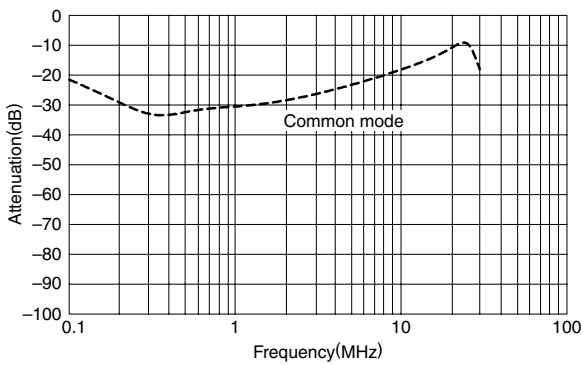


RTCN-5030

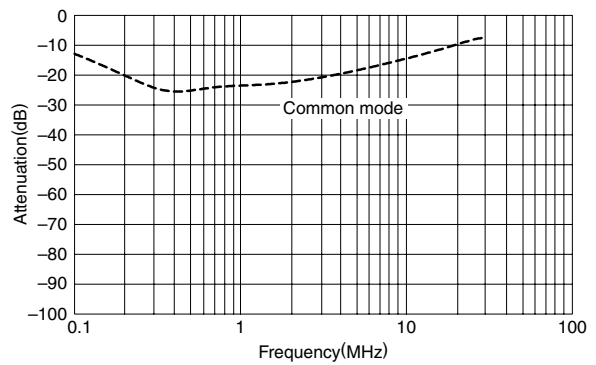


RTCN-5040

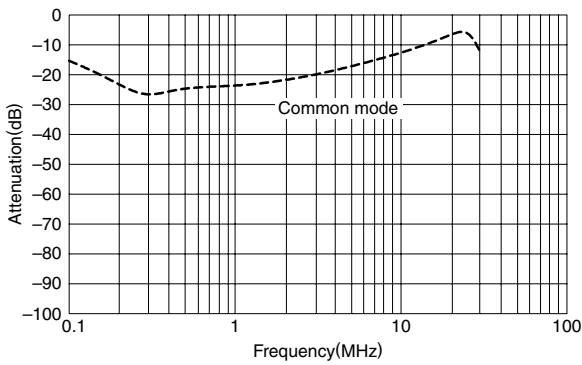


RTCN-5050

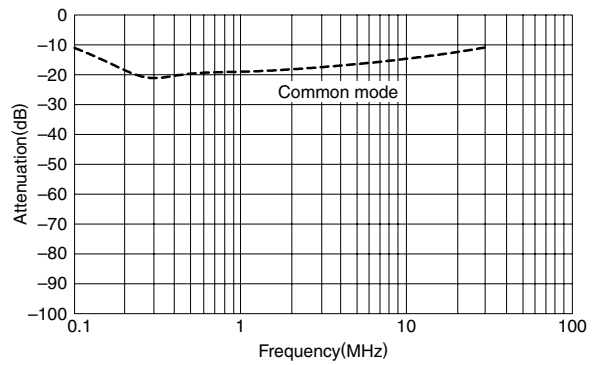


RTCN-5060

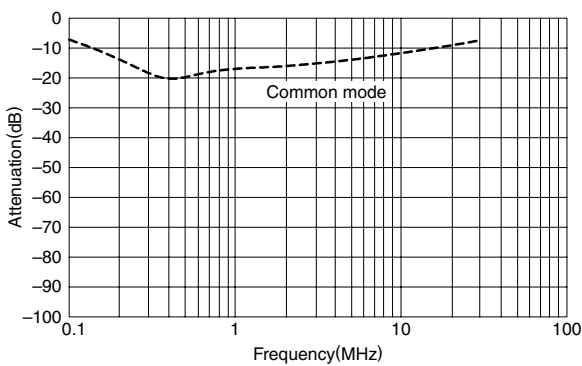


RTCN-5080

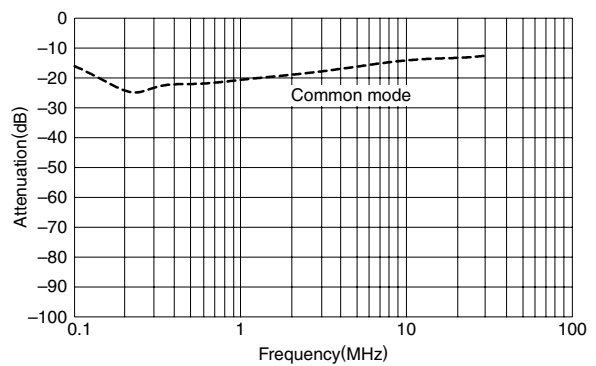


RTCN-5100

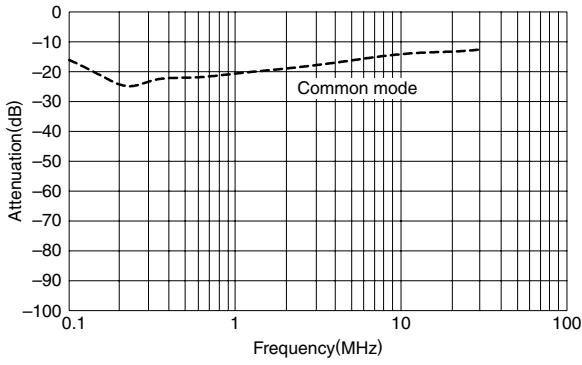


RTCN-5150

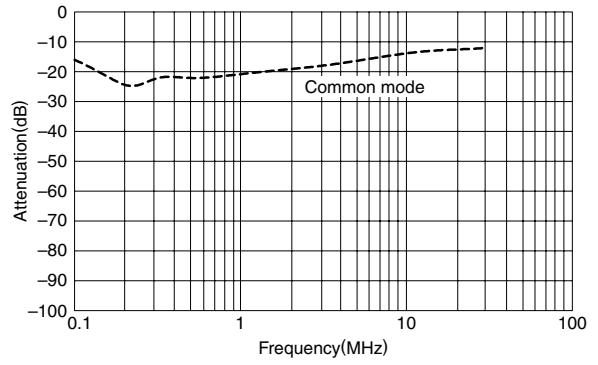

RTCN-5200

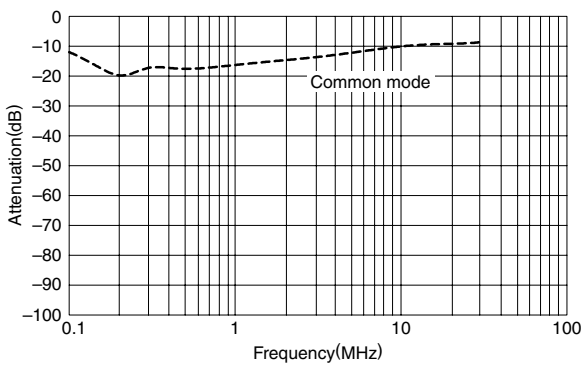

RTCN-5250

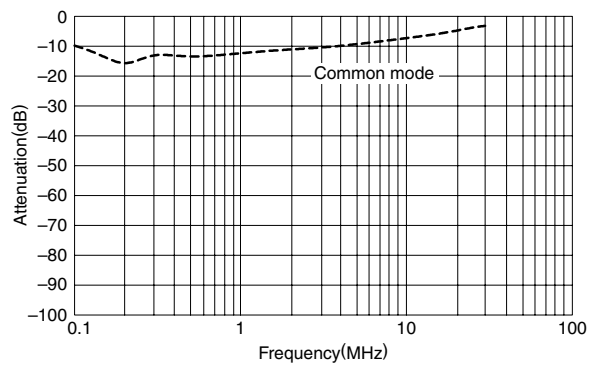

RTCN-5300

