

AC Filter

Standard- or Medical-Filter



Description

- Chassis:
Screw-on mounting, from top
- Line filter in standard and medical version, 1-stage, standard attenuation
- Quick connect terminals 6.3 x 0.8 mm

Approvals

- VDE Certificate Number: 40004673
- UL File Number: E72928

Characteristics

- Designed for standard applications
- Protection against interference voltage from the mains
Possible interferences generated in the equipment are strongly attenuated
- Universal line filter for standard applications
- Qualified for use in equipment according IEC/EN 60950

Other versions on request

- Version with wire connection
- Version with ZNR-varistor for overvoltage protection

References

Weblinks

[General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Accessories](#)


Technical Data

Ratings IEC	1 - 10A @ Ta 40 °C / 250VAC; 50Hz
Ratings UL/CSA	1 - 10A @ Ta 40 °C / 125VAC; 60Hz
Leakage Current	standard < 0.25mA (250V / 60Hz) medical (M5) < 5 µA resp. (M80) < 80 µA (250V / 60 Hz)
Dielectric Strength	1.7kVDC between L-N 2.7kVDC between L/N-PE Test voltage (2sec)
Allowable Operation Temp.	-25 °C to 100 °C
Climatic Category	25/100/21 acc. to IEC 60068-1
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Terminal	Quick connect terminals 6.3 x 0.8 mm
Material: Housing	Aluminum

Line Filter	Standard and Medical Version, IEC 60939, IEC 60601-1, UL 1283, UL 544, EN 133 200, CSA C22.2 no. 8 Technical details
MTBF	> 200'000h acc. to MIL-HB-217 F


Dimensions

Case 41

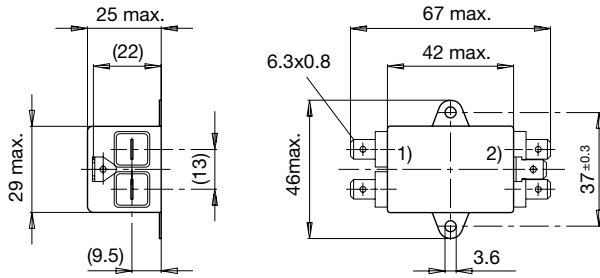

- 1) Line
- 2) Load

Diagrams



R and Cy according to version, see variants

- 1) Line, 2) Load

Attenuation Loss 0.1/100Ω differential mode 100/0.1Ω differential mode - - - differential mode ____ common mode





Standard version

1 A

3 A

6 A

10 A







Medical version (M5)

1 A

3 A


6 A

10 A




Medical version (M80)


1 A




3 A



6 A



10 A



Variants

Rated Current [A]	Filter-Type	Leakage Current [mA]	L [mH]	Cx [nF]	Cy [nF]	R [MΩ]	Weight [g]	Order Number
1	Standard Version	0.25	2 x 10	15	2.2	-	55	5500.2039
3	Standard Version	0.25	2 x 2	15	2.2	-	55	5500.2040
6	Standard Version	0.25	2 x 0.8	15	2.2	-	55	5500.2041
10	Standard Version	0.25	2 x 0.4	15	2.2	-	55	5500.2042
1	Medical Version (M5)	0.005	2 x 10	15	-	1	55	5500.2098
3	Medical Version (M5)	0.005	2 x 2	15	-	1	55	5500.2104
6	Medical Version (M5)	0.005	2 x 0.8	15	-	1	55	5500.2100
10	Medical Version (M5)	0.005	2 x 0.4	15	-	1	55	5500.2102

Packaging unit 25 Pcs