

IEC Appliance Inlet C14 with Filter, Circuit Breaker TA45

Standard- or Medical-Filter



V-Lock

**Description**

- Panel Mount:
Screw-on mounting from front side
- 3 Functions:
Appliance Inlet Protection class I, circuit breaker type TA45 2-pole, Line filter in standard and medical version
- Quick connect terminals 6.3 x 0.8 mm

Approvals

- VDE Certificate Number: 117118
- UL File Number: E72928

Characteristics

- All single elements are already wired
Unwired versions available on request
- Line switch non-illuminated or illuminated
Thermal overload protection
Optional with undervoltage- or remote trip release
- Qualified for use in equipment according IEC/EN 60950

References

Alternative: version without line filter [6145](#)
We recommend for new applications the new type [DF12](#)

Weblinks


[General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Accessories](#)

Newly available variants corresponding to V-Lock mating cordset. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.

Technical Data

Ratings IEC	1 - 10A @ Ta 40 °C / 250VAC; 50Hz	Appliance-Inlet/-Outlet	C14 acc. to IEC/EN 60320-1, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class 1
Ratings UL/CSA	1 - 15A @ Ta 40 °C / 125VAC; 60Hz	Circuit Breakers	Acc. IEC/EN 60934, UL 1077, CSA 22.2 no. 235 2-pole rocker switch, illuminated or non-illuminated. Optional with undervoltage- or remote trip release Short circuit capacity Icn: at In < 3A/240VAC : 10 x In at In ≥ 3A/240VAC : 300A
Leakage Current	standard < 0.5mA (250V / 60Hz) medical < 5 µA (250 V / 60 Hz)	Line Switch	Rocker switch 2-pole non-illuminated or illuminated acc. to IEC 61058-1 Technical details
Dielectric Strength	> 1.7 kVDC between L-N > 2.7 kVDC between L/N-PE Test voltage (2 sec)	Line Filter	Standard and Medical Version, IEC 60939, IEC 60601-1, UL 1283, UL 544, EN 133 200, CSA C22.2 no. 8 Technical details
Allowable Operation Temp.	-10 °C to 55 °C	MTBF	> 100'000h acc. to MIL-HB-217 F
Climatic Category	10/055/21 acc. to IEC 60068-1		
Degree of Protection	from front side IP 40 acc. to IEC 60529		
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140		
Terminal	Quick connect terminals 6.3 x 0.8 mm		
Panel Thickness s	Screw: max 8 mm Mounting screw torque max 0.5 Nm		
Material: Housing	Thermoplastic, black, UL 94V-0		

Dimensions

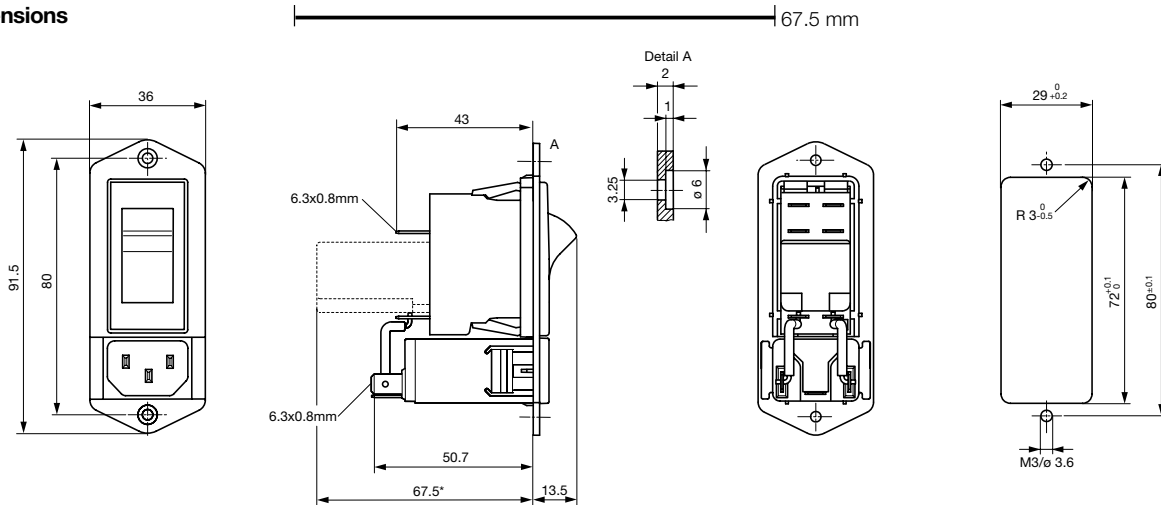

* --- Version TA45 with undervoltage release



Technical Data of Filter-Components

Rated Current [A]	Filter-Type	Inductances L [mH]	Capacitance CX [nF]	Capacitance CY [nF]	R [MΩ]
1	Standard Version	2 x 11	47	2.2	-
2	Standard Version	2 x 4	47	2.2	-
3	Standard Version	2 x 2.5	47	2.2	-
4	Standard Version	2 x 1.6	47	2.2	-
6	Standard Version	2 x 0.7	47	2.2	-
8	Standard Version	2 x 0.6	47	2.2	-
10	Standard Version	2 x 0.4	47	2.2	-
15	Standard Version	2 x 0.1	47	2.2	-
1	Medical Version (M5)	2 x 11	47	-	1
2	Medical Version (M5)	2 x 4	47	-	1
6	Medical Version (M5)	2 x 0.7	47	-	1
8	Medical Version (M5)	2 x 0.6	47	-	1
10	Medical Version (M5)	2 x 0.4	47	-	1
15	Medical Version (M5)	2 x 0.1	47	-	1

Diagrams

Standard version

Medical version




1) Line
2) Load

1) Line
2) Load


Attenuation Loss 0.1/100Ω differential mode 100/0.1Ω differential mode - - - - differential mode ____ common mode

Standard version


1 A




2 A




3 A




4 A




6 A




8 A



10 A




15 A




Medical version (M5)


1 A




2 A




3 A




4 A




6 A



8 A



10 A



15 A




Table 1 Selection for type TA45


Order example



- Line switch
 - 2-pole, rocker actuated
 - Quick connect terminal
- Other types on request

ABT **W** **F** **150** **C0**

Diagram

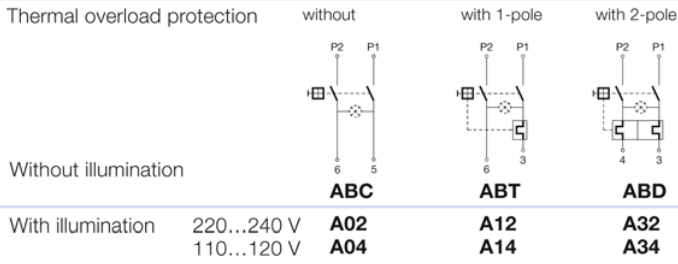


Colours

Switch front	Rocker	
W black	white	—
B black	black	—
6 black	—	orange transp.

Rocker legend

Surface	Illustration	Colour of print	Surface	Illustration	Colour of print
F embossed / Relief	— ○		M printed	— ○	black
H printed / bedruckt	ON OFF	white / weiss	P printed	I ○	white
K printed / bedruckt	ON OFF	black / schwarz	R printed	I ○	black
L printed / bedruckt	— ○	white / weiss			

Position of the rocker legend
e.g F




Rated current:

- Without thermal overload protection: code **C00** } $I_n = 20\text{ A}$
- With thermal overload protection: rated current I_n (A)

I_n	Code	I_n	Code	I_n	Code	I_n	Code
0,1	J01	1,3	J13	2,8	J28	10,0	100
0,2	J02	1,4	J14	3,0	030	11,0	110
0,3	J03	1,5	J15	3,5	035	12,0	120
0,4	J04	1,6	J16	4,0	040	13,0	130
0,5	J05	1,7	J17	4,5	045	14,0	140
0,6	J06	1,8	J18	5,0	050	15,0	150
0,7	J07	1,9	J19	6,0	060		
0,8	J08	2,0	J20	6,5	065		
0,9	J09	2,1	J21	7,0	070		
1,0	J10	2,2	J22	7,5	075		
1,1	J11	2,3	J23	8,0	080		
1,2	J12	2,5	J25	9,0	090		


Without release: code C0

Undervoltage release



•	•	•
•	•	•
•	•	•


Remote trip release






Code	Rated voltage U_n
• 2	240 V AC
• 3	230 V AC
• 4	120 V AC

Packaging unit 20 Pcs

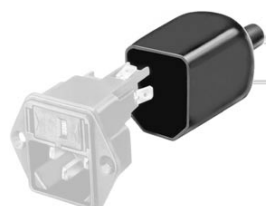Accessories


Description	0859.0074
 <p data-bbox="446 367 560 409">Assorted Covers Rear Cover</p>	

Mating Outlets/Connectors


Category / Description											
Appliance Outlet Overview complete											
	<table border="1"> <tr> <td>IEC Appliance Outlet F, Screw-on Mounting, Front Side, Solder Terminal</td> <td>4787</td> </tr> <tr> <td>IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal</td> <td>4788</td> </tr> <tr> <td>IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal</td> <td>5091</td> </tr> <tr> <td>IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal</td> <td>5092</td> </tr> </table>	IEC Appliance Outlet F, Screw-on Mounting, Front Side, Solder Terminal	4787	IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal	4788	IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal	5091	IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal	5092		
IEC Appliance Outlet F, Screw-on Mounting, Front Side, Solder Terminal	4787										
IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal	4788										
IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal	5091										
IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal	5092										
Appliance Outlet further types to 5145											
Connector Overview complete											
	<table border="1"> <tr> <td>IEC Connector C15, Rewireable, Straight</td> <td>0101</td> </tr> <tr> <td>IEC Connector C15A, Rewireable, Straight</td> <td>0102</td> </tr> <tr> <td>IEC Connector C15A, Rewireable, Straight</td> <td>0102-G</td> </tr> <tr> <td>IEC Connector C15A, Rewireable, Angled</td> <td>0112</td> </tr> <tr> <td>IEC Connector C13, Rewireable, Angled</td> <td>4012</td> </tr> </table>	IEC Connector C15, Rewireable, Straight	0101	IEC Connector C15A, Rewireable, Straight	0102	IEC Connector C15A, Rewireable, Straight	0102-G	IEC Connector C15A, Rewireable, Angled	0112	IEC Connector C13, Rewireable, Angled	4012
IEC Connector C15, Rewireable, Straight	0101										
IEC Connector C15A, Rewireable, Straight	0102										
IEC Connector C15A, Rewireable, Straight	0102-G										
IEC Connector C15A, Rewireable, Angled	0112										
IEC Connector C13, Rewireable, Angled	4012										
Connector further types to 5145											
Power Cord Overview complete											
	<table border="1"> <tr> <td>Power Cord with IEC Connector C13, Angled</td> <td>0311</td> </tr> <tr> <td>Power Cord with IEC Connector C13, Angled</td> <td>3011</td> </tr> <tr> <td>Power Cord with IEC Connector C13, Angled</td> <td>3012</td> </tr> <tr> <td>Power Cord with IEC Connector C13, Angled</td> <td>3013</td> </tr> <tr> <td>Power Cord with IEC Connector C13</td> <td>3020</td> </tr> </table>	Power Cord with IEC Connector C13, Angled	0311	Power Cord with IEC Connector C13, Angled	3011	Power Cord with IEC Connector C13, Angled	3012	Power Cord with IEC Connector C13, Angled	3013	Power Cord with IEC Connector C13	3020
Power Cord with IEC Connector C13, Angled	0311										
Power Cord with IEC Connector C13, Angled	3011										
Power Cord with IEC Connector C13, Angled	3012										
Power Cord with IEC Connector C13, Angled	3013										
Power Cord with IEC Connector C13	3020										
Power Cord further types to 5145											

Technical data (continued)
Circuit breaker

Tripping characteristics
 $I_n < 3 A$

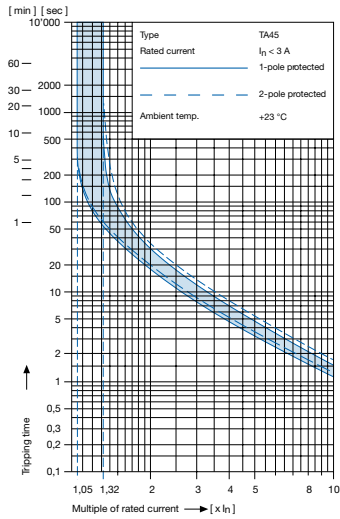

Tripping characteristics
 $I_n \geq 3... \leq 15 A$

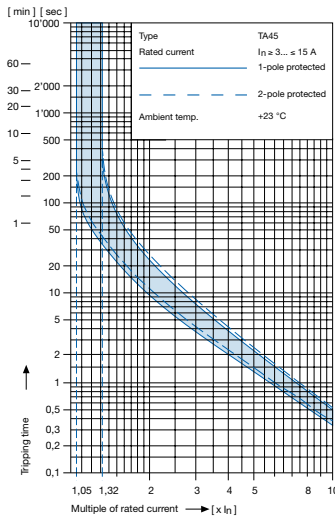

Effect of ambient temperature ¹⁾

The unit is calibrated for an ambient temperature of +23 °C. To determine the rated current for a lower or higher ambient temperature, use a correction factor from the table below.

*** Ambient temperature [°C] Correction factor**

-10	0,89
- 5	0,91
0	0,92
+23	1,00
+30	1,03
+40	1,08
+55	1,16

* Temperature must be measured at the rear of the breaker next to the terminals after equipment operating temperature has been reached.

¹⁾ Example

Rated current at +23 °C	6,0 A
Ambient temperature	+40 °C
Correction factor	1,08
Chosen rated current at + 40 °C ambient temperature	6 A x 1,08 = 6,5 A

Order code (Order example)

Type	Order code TA45 (2-pole rocker-switch without accessories)		Wiring 0 Without 1 With
5145.	A B T W F 1 5 0 C 0 see table 1		Type of line filter 1 Standard 3 Medical
			Rated current of line filter 1 1 (A) 5 6 (A) 2 2 (A) 6 8 (A) 3 3 (A) 7 10 (A) 4 4 (A) 8 15 (A)

Please note that Schurter will establish an internal part number for logistical use in addition to the order code. The format of this internal part number is, for example 5145.0031.001