



# Metric Spacers

## Brass Hexagonal Pillars


- ❖ Special body lengths can be specified, by modifying the order code. For example, R30-400xx02, xx denotes body length in mm.
- ❖ Please contact [technical@harwin.com](mailto:technical@harwin.com) for further information.
- ❖ Base material is free-machining brass, with nickel plating.

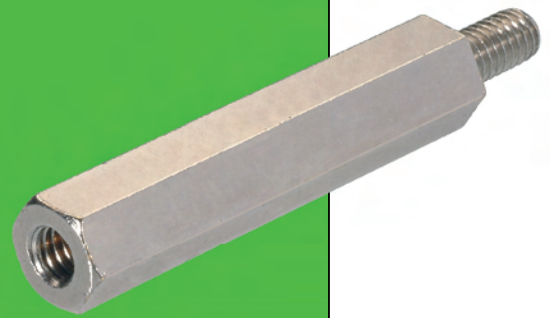

### MALE/MALE

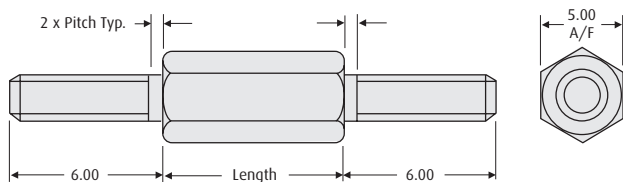

### MALE/FEMALE

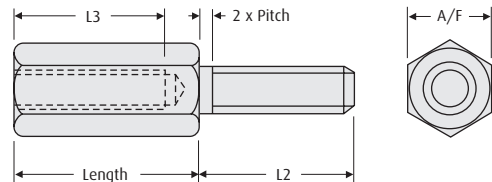

### CALCULATION OF L3 (min)

Series	Length mm										
	4	5	6	7	8	9	10	11	12	13	14+
R30-300	2.5	3.0	3.0	5.0	5.5	6.0	6.0	6.0	6.0	6.0	6.0
R30-301	2.5	3.0	3.0	5.0	5.5	6.0	7.0	8.0	8.0	8.0	8.0
R40-300	x	x	2.5	3.0	4.5	5.5	6.5	8.0	8.0	8.0	8.0
R50-300	x	x	x	x	4.0	5.0	6.0	7.5	8.0	10.0	10.0
R60-300	x	x	x	x	x	x	5.0	7.0	7.0	8.0	10.0

### HOW TO ORDER

**R XX - XXX XX 02**

SERIES CODE

#### THREAD SIZE & STYLE

R30-300	M3 Male/Female, 5.0mm A/F, L2 = 6mm
R30-301	M3 Male/Female, 5.0mm A/F, L2 = 8mm
R30-400	M3 Male/Male
R40-300	M4 Male/Female, 7.0mm A/F, L2 = 8mm
R50-300	M5 Male/Female, 8.0mm A/F, L2 = 10mm
R60-300	M6 Male/Female, 10.0mm A/F, L2 = 10mm

#### FINISH

02 Nickel

#### LENGTH (mm)

04-16, 18, 20, 25, 30, 35, 40	R30
06-16, 18, 20, 25, 30, 35	R40
08-16, 18, 20, 25, 30, 35, 40	R50
10-16, 18, 20, 25, 30, 40	R60

All dimensions in mm.

[www.harwin.com](http://www.harwin.com)

