


INSULATED PC SPACERS/SUPPORTS

- Board will be electrically insulated, eliminates need for insulating washers
- No tool required for installation • Easy snap-in assembly

LOCK-IN RELEASE THREADED SUPPORTS


- One end attaches to chassis with self tapping screw or nut
- Other end snap locks onto .062 (1.57) thick PC board
- Board is easily releasable, for repairs or upgrades
- Threaded mount provides an extremely strong hold to the chassis

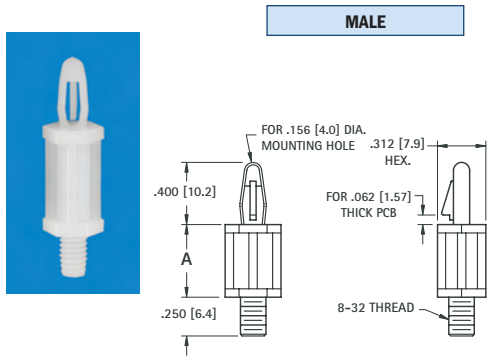

MALE

CAT. NO.	A LENGTH
9048	.250 (6.4)
9049	.375 (9.5)
9050	.500 (12.7)
9051	.625 (15.9)
9052	.750 (19.1)
9053	.875 (22.2)
9054	1.000 (25.4)

MATERIAL: Nylon 6/6, UL Rated 94V-0

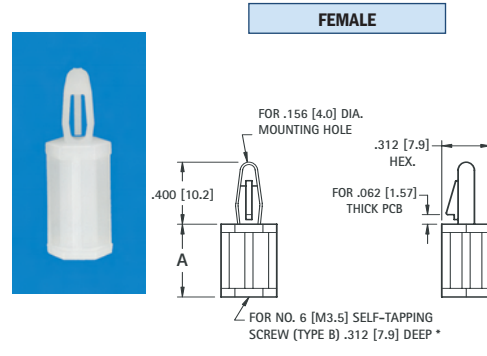


FEMALE

CAT. NO.	A LENGTH
9041	.250 (6.4)
9042	.375 (9.5)
9043	.500 (12.7)
9044	.625 (15.9)
9045	.750 (19.1)
9046	.875 (22.2)
9047	1.000 (25.4)

MATERIAL: Nylon 6/6, UL Rated 94V-0

PC SPACER SUPPORTS

- One attaches end locks into chassis • Other end supports the PC Board
- Ideal for mid supports of large boards
- Simplifies assembly for multiple support applications • Reduces the amount of holes required in PC board

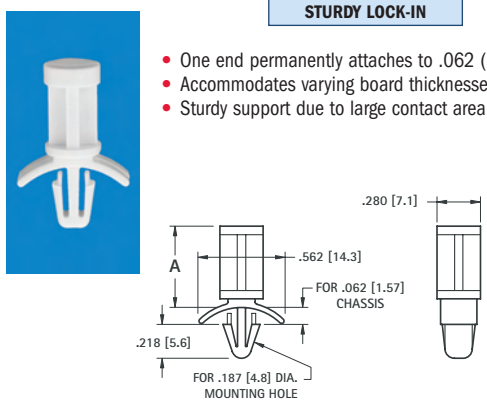


STURDY LOCK-IN

- One end permanently attaches to .062 (1.57) thick chassis
- Accommodates varying board thicknesses
- Sturdy support due to large contact area

CAT. NO.	A LENGTH
8823	.187 (4.7)
8822	.250 (6.4)
8824	.375 (9.5)
8825	.500 (12.7)
8826	.625 (15.9)
8827	.750 (19.1)
8828	.875 (22.2)

MATERIAL: Nylon 6/6, UL Rated 94V-0

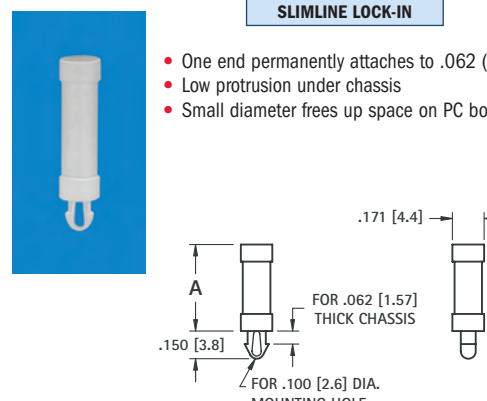

SLIMLINE LOCK-IN


- One end permanently attaches to .062 (1.57) thick chassis
- Low protrusion under chassis
- Small diameter frees up space on PC board

CAT. NO.	A LENGTH
9055	.125 (3.2)
9056	.187 (4.7)
9057	.250 (6.4)
9058	.375 (9.5)
9059	.500 (12.7)
9060	.625 (15.9)

MATERIAL: Nylon 6/6, UL Rated 94V-0

REVERSE CHASSIS MOUNT SUPPORTS

- Permanently attaches to .059 (1.51) - .065 (1.65) thick case from outside
- Provides flat clean cosmetic appearance • Ideal for low clearance applications or for mounting directly to case walls

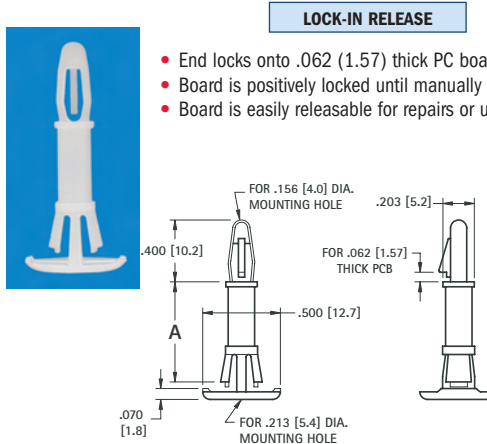


LOCK-IN RELEASE

- End locks onto .062 (1.57) thick PC board
- Board is positively locked until manually released
- Board is easily releasable for repairs or upgrades

CAT. NO.	A LENGTH
9061	.250 (6.4)
9062	.375 (9.5)
9063	.500 (12.7)
9064	.625 (15.9)

MATERIAL: Nylon 6/6, UL Rated 94V-0

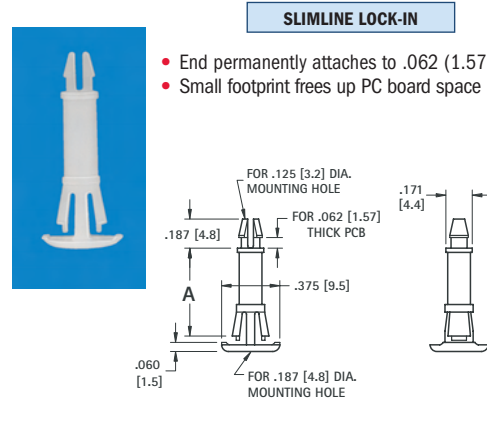

SLIMLINE LOCK-IN

- End permanently attaches to .062 (1.57) thick PC board
- Small footprint frees up PC board space

CAT. NO.	A LENGTH
9065	.250 (6.4)
9066	.375 (9.5)
9067	.500 (12.7)
9068	.625 (15.9)

MATERIAL: Nylon 6/6, UL Rated 94V-0

INSULATED PC SPACERS/SUPPORTS