



# Bumpon<sup>TM</sup> Protective Products

## Molded Shapes Series

SJ-5000 • SJ-5200 • SJ-5300 • SJ-5400

SJ-5500 • SJ-5700 • SJ-6100


Technical Data

January, 2003


### Product Description

3M<sup>TM</sup> Bumpon<sup>TM</sup> Protective Products are pressure sensitive adhesive-backed polyurethane products that can be used as feet, stops, spacers, and protectors in many applications.


The urethane is a durable, resilient elastomer. The aggressive, high tack pressure sensitive adhesive is protected with a release liner making application fast and easy.




Top Hat




Hemisphere




Cylindrical



Tapered Square



Hexagon



Top Hat

### Features

Bumpon Protective Products feature a plasticizer-free urethane composition which exhibits:

- Excellent skid resistance
- Long aging resiliency – will not crack or harden
- Abrasion resistance
- Resistance to marring and staining

### Application Ideas

Use almost anywhere slamming, scratching, nicking, scuffing, marring, sliding, vibration, or noise could be a problem for your product.

- **Feet** on the bottom of blenders, desk top calculators, electronic cabinetry, telephones, keyboards, foot pedals, scales, clocks, speakers, dispensers, and computers.
- **Stops** for cabinet doors, lids, and drawers.
- **Spacers** for picture frames to provide alignment; for auto glass as an aid in assembly.
- **Protectors** for stacked glass and metal sheets.





# 3M™ Bumpon™ Protective Products

## Molded Shapes Series

SJ-5000 • SJ-5200 • SJ-5300 • SJ-5400 • SJ-5500 • SJ-5700 • SJ-6100

### Transparent and True White

### 3M™ Bumpon™ Protective Products



#### Product Number

**Bumpon SJ-5302, SJ-5402\***

**Bumpon SJ-5306, SJ-5406\***

**Bumpon SJ-5303**

**Bumpon SJ-5312, SJ-5412\***

#### Colors

Transparent, True White\*

Transparent, True White\*

Transparent

Transparent, True White\*

#### Width inches (mm)

0.312 (7.9)

0.375 (9.5)

0.44 (11.1)

0.50 (12.7)

#### High inches (mm)

0.085 (2.2)

0.150 (3.8)

0.20 (5.0)

0.14 (3.5)

#### Form

17x24 Matrix (Bumpon SJ-5302)

8x18 Matrix (Bumpon SJ-5402)





6x9 Matrix

8x7 Matrix

8x7 Matrix

\*Use Bumpon SJ-5400 Series to identify true white products.

### Hemisphere



#### Product Number

**Bumpon SJ-5003**

**Bumpon SJ-5027, SJ-5327\*\***

**Bumpon SJ-5017, SJ-5317\*\***

**Bumpon SJ-5009, SJ-5309\*\***

#### Colors

White, Gray, Brown, Black

White, Gray, Brown, Black,  
Transparent\*\*

White, Gray, Brown, Black,  
Transparent\*\*

White, Gray, Brown, Black,  
Transparent\*\*

#### Width inches (mm)

0.44 (11.1)

0.63 (16.0)

0.75 (19.0)

0.88 (22.3)

#### High inches (mm)

0.20 (5.0)

0.31 (7.9)

0.38 (9.6)

0.40 (10.1)

#### Form

8x7 Matrix





5x8 Matrix

4x10 Matrix

3x8 Matrix

\*\*Use Bumpon SJ-5300 Series to identify transparent products.

### Cylindrical



#### Product Number

**Bumpon SJ-5012**

**Bumpon SJ-5001, SJ-5301\*\***

**Bumpon SJ-5744, SJ-5344\*\***

**Bumpon SJ-5514**

#### Colors

White, Gray, Brown, Black

Black, Gray, Transparent\*\*

Black, Transparent\*\*

White, Gray, Brown, Black,

#### Width inches (mm)

0.50 (12.7)

0.50 (12.7)

0.75 (19)

0.81 (20.6)

#### High inches (mm)

0.14 (3.5)

0.14 (3.5)

0.16 (4.0)

0.52 (13.1)

#### Form

8x7 Matrix

5x8 Matrix





4x10 Matrix

4x1 Matrix

\*\*Use Bumpon SJ-5300 Series to identify transparent products.

**Note:** All dimensions  $\pm 0.02$  inches or  $\pm 0.5$  mm measured without the adhesive liner.

### Tapered Square



#### Product Number

**Bumpon SJ-5007, SJ-5307\*\***

**Bumpon SJ-5008, SJ-5308\*\***

**Bumpon SJ-5018, SJ-5318\*\***

**Bumpon SJ-5023, SJ-5323\*\***

#### Colors

Black, Transparent\*\*

White, Gray, Brown, Black,  
Transparent\*\*

White, Gray, Brown, Black,  
Transparent\*\*

White, Gray, Brown, Black,  
Transparent\*\*

#### Width inches (mm)

0.40 (10.2)

0.50 (12.7)

0.50 (12.7)

0.81 (20.5)

#### High inches (mm)

0.10 (2.5)

0.12 (3.1)

0.23 (5.8)

0.30 (7.6)

#### Form

6x9 Matrix

8x10 Matrix

8x10 Matrix

4x9 Matrix

\*\*Use Bumpon SJ-5300 Series to identify transparent products.





# 3M™ Bumpon™ Protective Products

## Molded Shapes Series

SJ-5000 • SJ-5200 • SJ-5300 • SJ-5400 • SJ-5500 • SJ-5700 • SJ-6100

### Others




### 3M™ Bumpon™ Protective Products

				
Product Number	Bumpon SJ-5705	Bumpon SJ-5077, SJ-5377	Bumpon SJ-5532	Bumpon SJ-5201*, SJ-5202*
Colors	Black	Black, Transparent	White, Gray, Brown, Black	Light Brown
Width inches (mm)	1.2 (31.75)	0.65 (16.5)	1.88 (47.7)	0.433 (11.0)
High inches (mm)	0.24 (6.1)	0.16 (4.0)	0.66 (16.7)	0.125 (3.2) (Bumpon SJ-5201) 0.063 (1.6) (Bumpon SJ-5202)
Form	Separate Parts	Pads of 39	Separate Parts	11x12 Matrix

\*Bumpon SJ-5201 and Bumpon SJ-5202 are die cut parts from Bumpon SJ-5200 Series Rollstock.

**Note:** Above dimensions  $\pm 0.02$  inches or  $\pm 0.5$  mm measured without the adhesive liner.

### Top Hat

			
Product Number	Bumpon SJ-6115	Bumpon SJ-6125	Bumpon SJ-5510 Continuous Strip*
Colors	Black	Black	Brown, White, Gray, Black
Diameter of Brim, inches (mm)	0.625 (15.9)	0.625 (15.9)	Width, inches (mm): 0.50 (12.7)
Height of Brim, inches (mm)	0.093 (2.36)	0.093 (2.36)	Height, inches (mm): 0.15 (3.88)
Total Height, inches (mm)	0.187 (4.75)	0.250 (6.35)	
Form	5x8 Matrix	5x8 Matrix	50' rolls, 5 rolls per case*

**Note:** Dimensions for Bumpon SJ-6115 and Bumpon SJ-6125  $\pm 0.005$  inches ( $\pm 0.13$  mm) for diameter  $\pm 0.015$  inches ( $\pm 0.38$  mm) for height measured without adhesive liner.

\*Continuous strip can be cut by the customer to a specific length. The surface has lines that appear every 9" on the strip.

### Special Products

#### Custom Shape and Color

3M can match most colors and customize shapes to your specifications. Call your local 3M sales rep to discuss Bumpon Protective Products to meet your needs.

#### Adhesive for Special Applications

Foam tape and other special adhesives are available for many custom applications.

#### Special Easy Strip Packaging

Packaged into strips or die cut and perforated pads can help simplify some assembly operations. Product currently available:

- 3M™ Bumpon™ SJ-5518 die cut perforated on pads of 64
- 3M™ Bumpon™ SJ-5508 die cut and perforated on pads of 64
- 3M™ Bumpon™ SJ-5523 4x1 matrix separated by perforations
- 3M™ Bumpon™ SJ-5514 4x1 matrix separated by perforations

**Note:** Custom Bumpon products may require a qualifying minimum and/or a one time set-up charge. Call your local 3M sales representative for more information.

# 3M™ Bumpon™ Protective Products

## Molded Shapes Series

SJ-5000 • SJ-5200 • SJ-5300 • SJ-5400 • SJ-5500 • SJ-5700 • SJ-6100

### Typical Physical Properties and Performance Characteristics

**Note:** The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

#### 3M™ Bumpon™ Protective Product Series

	3M Test Method	Bumpon SJ-5000 Bumpon SJ-5500 Bumpon SJ-5700	Bumpon SJ-5300 Bumpon SJ-5400	Bumpon SJ-5200	Bumpon SJ-6100
Hardness, Shore A	ASTM-D2240	70	75	25	70
Resilience, %	ASTM-D2632, 0.125" sample	30	5	20	30
Kinetic Coefficient of Friction (Mk) (Dependent on Test Surface) <sup>1</sup>	ASTM-D1894				
	Stainless Steel	>1	>1	—	>1
	Glass	>1	>1	—	>1
	Formica® laminate	0.9-1.4	0.9-1.4	—	0.9-1.4
	Wood	0.9-1.4	0.9-1.4	—	0.9-1.4
Abrasion Resistance (Taber H18, 1kg) g/1000 cycles <sup>2</sup>	ASTM-C501	1.7-1.9	0.13	—	0.13
Tensile, lbs/in <sup>2</sup> (MPa) <sup>2</sup>	ASTM-D412, Die A	600 (4.1)	740 (5.1)	120 (0.8)	600 (4.1)
Elongation, % <sup>2</sup>	ASTM-D412, Die A	100	65	100	100
Dielectric Strength, volts/mil <sup>2</sup>	ASTM-D1000	200	370	—	200
Stain Resistance	3M-24 hours @ 158°F against white paint 7 days exposed to UV.	No Staining	No Staining	No Staining	No Staining
Flammability Listing	UL-94HB	Pass; UL Recognized	Pass; Not UL Recognized <sup>3</sup>	Not UL Recognized	Pass; UL Recognized (color black only)
Application Temperature		40°F (5°C) to 125°F (52°C)			
Service Temperature	Constant: Intermittent:	-30°F (-34°C) to 150°F (66°C) Up to 225°F (107°C)			
Solvent and Fuel Resistance	24 hour immersion				
	• 5% Detergent in water	No Apparent Effect			
	• 25% Ammonia in water	No Apparent Effect			
	• Bleach	No Apparent Effect			
	• Hydrochloric Acid (1 Normal Solution)	No Apparent Effect			
	• Diesel Fuel	No Apparent Effect			
	• Auto Oil	No Apparent Effect			
	• Isopropyl Alcohol	Slight Swelling			
	• Heptane	Slight Swelling			
	• Toluol	Considerable Swelling			
	• Lacquer Thinner	Considerable Swelling			

#### Notes:

<sup>1</sup>Two important laws of friction applicable to Bumpon products are: (1) Friction is independent of the area of contact between solids and (2) friction is proportional to the load between solid surfaces. Thus, if the load (weight) is doubled the force required to cause sliding is also double. This is expressed mathematically as follows: Sliding Force = M<sub>k</sub> x weight.

<sup>2</sup>These properties were run on sheet material from the same materials as the individual Bumpon products

<sup>3</sup>Bumpon SJ-5300 Series products are not UL listed.

# 3M™ Bumpon™ Protective Products

## Molded Shapes Series

SJ-5000 • SJ-5200 • SJ-5300 • SJ-5400 • SJ-5500 • SJ-5700 • SJ-6100

### Relative Adhesive Performance Characteristics

**Note:** The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

#### 3M™ Bumpon™ Protective Product Series

	Bumpon SJ-5000 Bumpon SJ-5550 Bumpon SJ-5700*	Bumpon SJ-5200 Bumpon SJ-5300 Bumpon SJ-5400	Bumpon SJ-6100
Adhesive	Natural Rubber (R-30) <sup>1</sup>	Acrylic (A-20) <sup>2</sup>	Synthetic Rubber (R-25) <sup>3</sup>
Initial Adhesion			
Low Surface Energy	Good	Poor	Excellent
High Surface Energy	Good	Fair	Excellent
Adhesion (Peel)			
Low Surface Energy	Good	Poor	Excellent
High Surface Energy	Good	Good	Excellent
Static Shear			
75°F (25°C)	Excellent	Excellent	Excellent
120°F (49°C)	Good	Excellent	Good
158°F (70°C)	Poor	Excellent	Fair
Impact Resistance			
Low Surface Energy	Excellent	Poor	Good
High Surface Energy	Excellent	Good	Good
Dynamic Shear	Good	Excellent	Good
Solvent Resistance	Good	Excellent	Good
Age Life	Good	Excellent	Good

\*Some Bumpon SJ-5700 Series custom products may use other adhesives in their construction.


- 1) **Natural Rubber (R-30)** - Used in the construction of 3M™ Bumpon Protective Product Series SJ-5000, SJ-5500, and SJ-5700, this high tack adhesive provides excellent initial adhesion. The adhesive has the capability of providing excellent adhesion to a wide variety of surfaces, including many low surface energy surfaces such as polypropylene, polyethylene, and powder coated paints. This adhesive system shows reduced shear properties at elevated temperatures.
- 2) **Acrylic (A-20)** - Used in the construction of 3M™ Bumpon Protective Product Series SJ-5200, SJ-5300, and SJ-5400, this high strength adhesive system provides excellent shear strength properties. The adhesive has the capability of providing excellent adhesion to many high surface energy substrates such as metals, ABS, polycarbonate, and acrylic. When adhesion is required on low surface energy/substrates (e.g., polypropylene, polyethylene, etc.), acrylic-based adhesives do not perform as well as rubber-based adhesives.
- 3) **Synthetic Rubber (R-25)** - Used in the construction of 3M™ Bumpon Protective Product Series SJ-6100, this very high tack adhesive system provides excellent initial adhesion. The adhesive has the capability of providing excellent adhesion to a wide variety of surfaces, including many low surface energy surfaces such as polypropylene, polyethylene, and powder coated paints. This adhesive system shows reduced shear properties at elevated temperatures.

### Adhesive Performance

#### Static Shear Strength

This figure on static shear illustrates typical performance characteristics of the adhesive systems used on molded Bumpon products

3M Test Method-Inclined Plane Static Shear Test Method; 30° incline, tested on ABS using Bumpon SJ-5312 (A-20), Bumpon SJ-6112 (R-25) and Bumpon SJ-5012 (R-30) products. 2 lb. load per Bumpon products. Measured time of creep: 15 minutes.

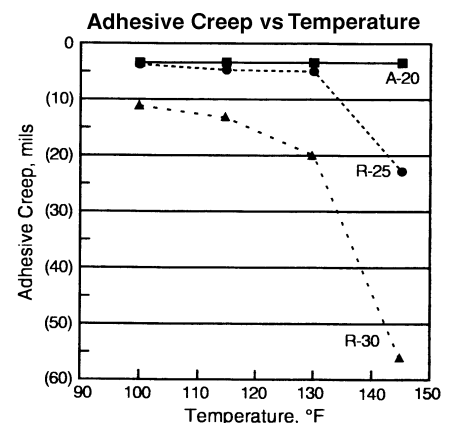

# 3M™ Bumpon™ Protective Products

## Molded Shapes Series

SJ-5000 • SJ-5200 • SJ-5300 • SJ-5400 • SJ-5500 • SJ-5700 • SJ-6100


### Application Techniques

To obtain maximum adhesion, surfaces must be unified, dry, and free of contaminants. Surface contact is essential to adhesive performance. To maximize contact on a substrate:


- Clean surfaces with low strength solvent such as isopropyl alcohol (rubbing alcohol) or heptane.\*
- Apply firm pressure to help increase the cold flow and contact of the adhesive with the substrate.
- Allow time (dwell) to increase the surface contact and adhesion (see illustrations below).

**\*Note:** Be sure to follow the manufacturer's precautions and directions for use when using solvents.

#### Adhesive Surface Contact

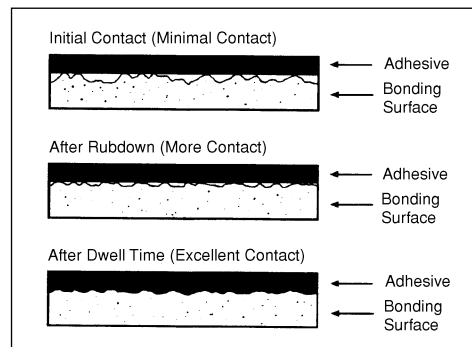

#### Rubber Adhesive (R-30) vs. Acrylic Adhesive (A-20) Bond Build Up

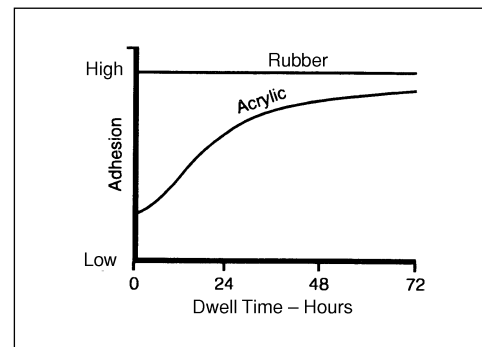

### Environmental Exposure

Colored and transparent 3M™ Bumpon™ Protective Products are intended for interior applications where resilience and other physical properties will remain unchanged. When exposed to UV light for extended periods some slight discoloration or yellowing may occur.

Bumpon products may be used outdoors in a protected area with some discoloration possible; colored Bumpon products may chalk.

Simultaneous exposure to high humidity and temperature may degrade (soften) the Bumpon product urethane.

SJ-5000 • SJ-5200 • SJ-5300 • SJ-5400 • SJ-5500 • SJ-5700 • SJ-6100

<b>Shelf Life</b>	Shelf life is 18 months from date of manufacture when stored in original cartons at 60-80°F (15-27°C) and 40-50% relative humidity.
-------------------	---

# 3M™ Bumpon™ Protective Products

## Molded Shapes Series

SJ-5000 • SJ-5200 • SJ-5300 • SJ-5400 • SJ-5500 • SJ-5700 • SJ-6100

---

### Precautionary Information

Refer to Product Label and Material Safety Data Sheet for health and safety information before using this product. For additional health and safety information, call 1-800-364-3577 or (651) 737-6501.

---

### For Additional Information

To request additional product information or to arrange for sales assistance, call toll free 1-800-362-3550 or visit [www.3M.com/industrialtape](http://www.3M.com/industrialtape). Address correspondence to: 3M Industrial Adhesives and Tapes Division, Building 21-1W-10, 900 Bush Avenue, St. Paul, MN 55106. Our fax number is 651-733-9175. In Canada, phone: 1-800-364-3577. In Puerto Rico, phone: 1-787-750-3000. In Mexico, phone: 52-70-04-00.

---

### Important Notice

3M MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a 3M product in a particular application. The materials to be bonded with the product, the surface preparation of those materials, the product selected for use, the conditions in which the product is used, and the time and environmental conditions in which the product is expected to perform are among the many factors that can affect the use and performance of a 3M product. Given the variety of factors that can affect the use and performance of a 3M product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's application.

---

### Limitation of Remedies and Liability

If the 3M product is proved to be defective, THE EXCLUSIVE REMEDY, AT 3M'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE 3M PRODUCT. 3M shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including, but not limited to, contract, negligence, warranty, or strict liability.

ISO 9002

This Industrial Adhesives and Tapes Division product was manufactured under a 3M quality system registered to ISO 9002 standards.



Industrial Business  
Industrial Adhesives and Tapes Division

3M Center, Building 21-1W-10, 900 Bush Avenue  
St. Paul, MN 55106



Recycled Paper  
40% pre-consumer  
10% post-consumer

Bumpon is a trademark of 3M.  
Printed in U.S.A.

©3M 2003 70-0709-4402-3 (1/03)