


PART NO.	SCREW SIZE	APP. METRIC EQUIVALENT	"L" ±.010	"A" ±.010	"B" ±.010	"C" ±.005	"D" ±.005
MNI-HT #4-2	#4	M3	.031 (0.8)	.280 (7.1)	.047 (1.2)	.145 (3.7)	.118 (3.0)
MNI-HT-#4-220 *			.032 (0.8)	.215 (5.5)	.040 (1.0)	.135 (3.4)	.116 (2.9)
MNI-HT-#10-6	#10	M4.5	.093 (2.4)	.399 (10.1)	.063 (1.6)	.260 (6.6)	.200 (5.1)

\* DESIGN ALLOWS INSERTION IN THE TAB OF A TO-220 TRANSISTOR

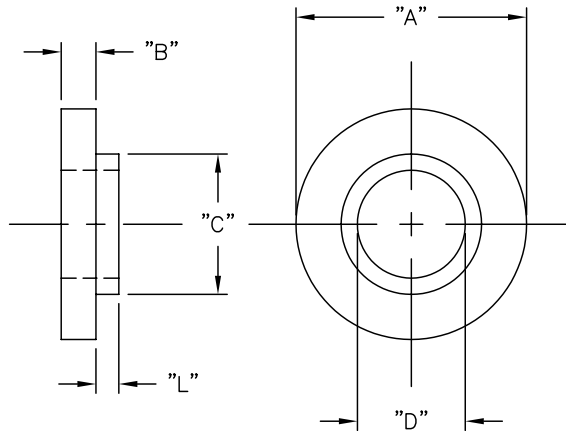

NOTES:

1. MATERIAL: 40% GLASS FILLED.  
POLYPHENYLENE SULFIDE, (RMS-50) UL94 V-0.
2. COLOR: BLACK.

TITLE: MOLDED NYLON INSULATOR, HIGH TEMPERATURE		DWG IN IN (MM) FINAL			
TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1'		FILE # MNI-HT	DWN: J.B.	APP:	
C SEE ECN #892 FOR CHANGES SM 12.14.04		MAT'L: SEE NOTES	DT: 01-17-96	DT:	PART #
B UPDATED TABLE AND ADDED "SULFIDE" TO NOTES SM 02.25.02		RE: RICHCO, INC.	RICHCO INC. PO BOX 804238, CHICAGO, 60680 (773) 539-4060		SEE TABLE
A CHANGED FILE NO. AND TITLE BLOCK SM 12.04.01					PRINT TYPE
REV DESCRIPTION ENGR DATE					CA