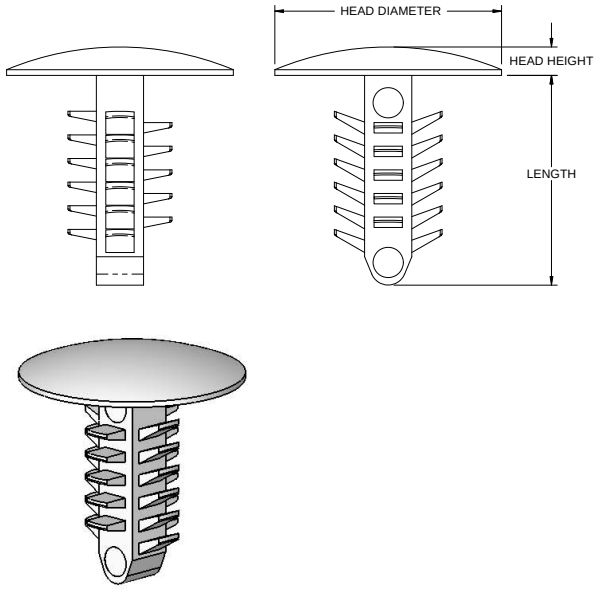


| PART NO. | HOLE DIAMETER ±.003 [0.08] | HEAD DIAMETER | SUGGESTED TOTAL BOARD THICKNESS | HEAD HEIGHT | LENGTH |
|---|---|---|---|---|---|
| RBF-4-8.6-8 | .157(4.00) | .32(8.0) | .08-.17(2.1-4.3) | .04(1.0) | .34(8.6) |
| RBF-4-11.1-8 | | | .08-.28(2.1-7.2) | | .44(11.1) |
| RBF-4-15-8 | | | .22-.42(5.7-10.7) | | .59(15.0) |
| RBF-4-8.6-12 | | .47(12.0) | .08-.17(2.1-4.3) | .06(1.5) | .34(8.6) |
| RBF-4-11.1-12 | | | .08-.28(2.1-7.2) | | .44(11.1) |
| RBF-4-15-12 | | | .22-.42(5.7-10.7) | | .59(15.0) |
| RBF-4-8.6-16 | | .63(16.0) | .08-.17(2.1-4.3) | .08(2.0) | .34(8.6) |
| RBF-4-11.1-16 | | | .08-.28(2.1-7.2) | | .44(11.1) |
| RBF-4-15-16 | | | .22-.42(5.7-10.7) | | .59(15.0) |
| RBF-4.8-8.6-8 | .188(4.76) | .32(8.0) | .08-.17(2.1-4.3) | .04(1.0) | .34(8.6) |
| RBF-4.8-11.1-8 | | | .08-.28(2.1-7.2) | | .44(11.1) |
| RBF-4.8-15-8 | | | .22-.42(5.7-10.7) | | .59(15.0) |
| RBF-4.8-8.6-12 | | .47(12.0) | .08-.17(2.1-4.3) | .06(1.5) | .34(8.6) |
| RBF-4.8-11.1-12 | | | .08-.28(2.1-7.2) | | .44(11.1) |
| RBF-4.8-15-12 | | | .22-.42(5.7-10.7) | | .59(15.0) |
| RBF-4.8-8.6-16 | | .63(16.0) | .08-.17(2.1-4.3) | .08(2.0) | .34(8.6) |
| RBF-4.8-11.1-16 | | | .08-.28(2.1-7.2) | | .44(11.1) |
| RBF-4.8-15-16 | | | .22-.42(5.7-10.7) | | .59(15.0) |
| RBF-6.4-8.6-8 | *.250(6.35) | .32(8.0) | .08-.17(2.1-4.3) | .04(1.0) | .34(8.6) |
| RBF-6.4-11.1-8 | | | .08-.28(2.1-7.2) | | .44(11.1) |
| RBF-6.4-15-8 | | | .22-.42(5.7-10.7) | | .59(15.0) |
| RBF-6.4-8.6-12 | | .47(12.0) | .08-.17(2.1-4.3) | .06(1.5) | .34(8.6) |
| RBF-6.4-11.1-12 | | | .08-.28(2.1-7.2) | | .44(11.1) |
| RBF-6.4-15-12 | | | .22-.42(5.7-10.7) | | .59(15.0) |
| RBF-6.4-8.6-16 | | .63(16.0) | .08-.17(2.1-4.3) | .08(2.0) | .34(8.6) |
| RBF-6.4-11.1-16 | | | .08-.28(2.1-7.2) | | .44(11.1) |
| RBF-6.4-15-16 | | | .22-.42(5.7-10.7) | | .59(15.0) |
| RBF-7.1-11.1-8 | *.281(7.14) | .32(8.0) | .08-.28(2.1-7.2) | .04(1.0) | .44(11.1) |
| RBF-7.1-15-8 | | | .15-.42(3.8-10.7) | | .59(15.0) |
| RBF-7.1-19-8 | | | .27-.56(6.9-14.2) | | .75(19.0) |
| RBF-7.1-11.1-12 | | .47(12.0) | .08-.28(2.1-7.2) | .06(1.5) | .44(11.1) |
| RBF-7.1-15-12 | | | .15-.42(3.8-10.7) | | .59(15.0) |
| RBF-7.1-19-12 | | | .27-.56(6.9-14.2) | | .75(19.0) |
| RBF-7.1-11.1-16 | | .63(16.0) | .08-.28(2.1-7.2) | .08(2.0) | .44(11.1) |
| RBF-7.1-15-16 | | | .15-.42(3.8-10.7) | | .59(15.0) |
| RBF-7.1-19-16 | | | .27-.56(6.9-14.2) | | .75(19.0) |

* FOR USE IN METAL, LEADING EDGE OF HOLE MUST BE BROKE

NOTES:
1. STANDARD MATERIAL: NYLON 6/6 UL94 V-2 (RMS-01). COLOR BLACK.
2. ALTERNATE MATERIALS AVAILABLE BY SPECIAL ORDER ONLY:
 - NYLON 6/6 UL94 V-2 (RMS-01). COLOR NATURAL. TO ORDED ADD "NT" ON THE END OF BASE PART NO.
 - NYLON 6/6 UL 94 V-0 (RMS-19). COLOR BLACK. TO ORDER ADD "-V0" TO END OF PART NUMBER.
 - UV STABILIZED NYLON UL 94 V-2 (RMS-46). COLOR BLACK. TO ORDER ADD "-UVB" TO THE END OF PART NO.

| REV. | DESCRIPTION | ENGR. | DATE |
|---|---|---|---|
| D | SEE CO 200656 FOR CHANGES | SK | 04/13/11 |
| C | SEE CO 200370 FOR CHANGES | SK | 05/26/09 |
| B | SEE ECN # 917 FOR CHANGES | SK | 01/18/05 |
| A | RELEASED FOR PRODUCTION | SM | 10/19/04 |

TITLE: BARBED PUSH FASTENER

DWG IN IN [MM]

CREATED USING SOLIDWORKS

TOLERANCES UNLESS NOTED .XX=±.01 .XXX=±.005 FRAC.=±1/64 ANG.=±1°

FILE #: RBF | DWN: D.J.Z. | APP: DJZ

SHEET: 1 OF 1 | SHEET SIZE: B | DT: 06/09/2004 | CHKD: SJ

FINAL

RE: RICHCO INC. --

RICHCO, INC.
ENG@RICHCO-INC.COM
(773) 539-4060

PART # SEE TABLE

PRINT TYPE CA

Downloaded from Elcodis.com electronic components distributor