
## 4 1/2 DIGIT

## **WIRING**

## Pin

- 1 +5V
- 2 Neg. Supply
- 3 INHI
- 4 INLO
- 5 Dec. common
- 6 Dec. 0000.0 when connected to decimal common
- 7 Dec. 000.00 when connected to decimal common
- 8 Dec. 00.000 when connected to decimal common
- 9 Dec. 0.0000 when connected to decimal common
- 10 No connection
- 11 Signal Hold when connected to V+
- 12 B/L V+ (Backlighted models only)
- 13 B/L V- (Backlighted models only)

## PANEL MOUNTING

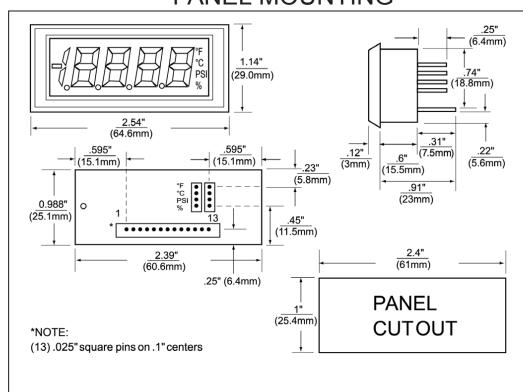

\*Note: If the input signal is not referenced to the power supply, pins 2 & 4 should be tied together for proper operation.

**IS-401** Rev. 10H06