

# MODEL TL-5276/W



For Utility Metering Memory Back-up Applications

## TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)




- Nominal capacity @ 1 mA, to 2V 1.0 Ah
- Rated voltage 3.6 V
- Maximum recommended continuous current 50 mA
- Maximum pulse current capability 100 mA
- Enclosure Lexan 143 UV stable
- Operating temperature range -55°C to +85°C
- U.L. Component Recognition, MH 12193

## TADIRAN LITHIUM BATTERIES

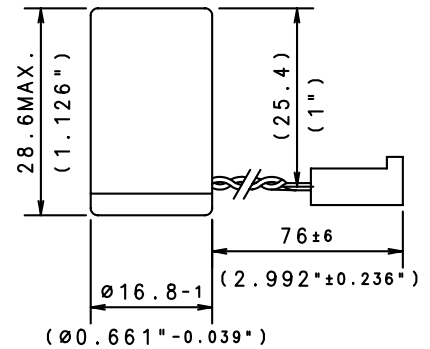

### ADDITIONAL INFORMATION

CONNECTOR TYPE MOLEX P/N 22-01-3027  
OR COMPATIBLE  
CATALOUGE NO. 15-5276-30000

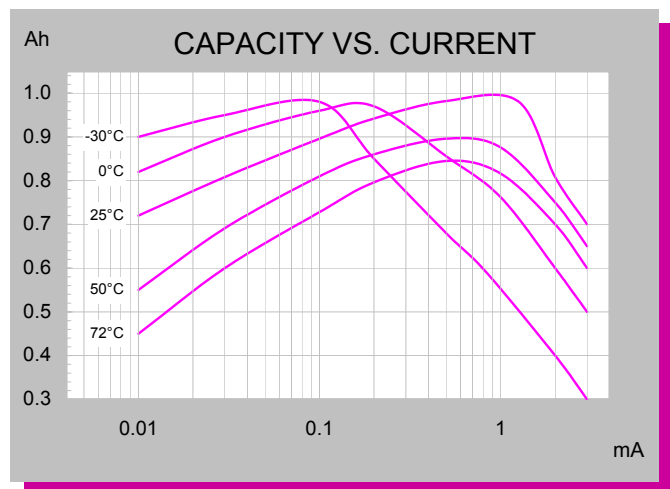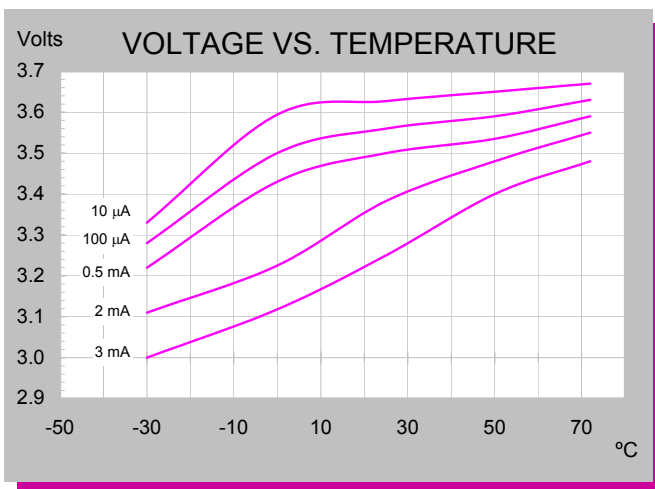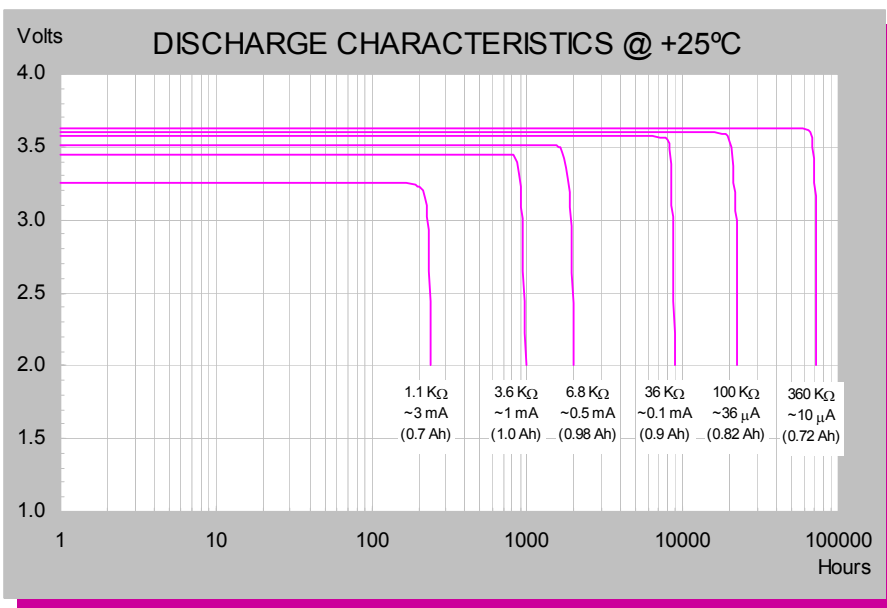

## LITHIUM XTRA

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.  
ECN 1501445 Rev. D. 01/2007