


FCI CONFIDENTIAL



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

1	2	3	4
FCI PART NO.	POWER TYPE	LENGTH "X"	
10084089-Z0050YYLF	24V	500+25/-0	
10084089-Z0100YYLF	24V	1000±15	
10084089-Z0300YYLF	24V	3000±25	
10084089-Z0500YYLF	24V	5000±25	

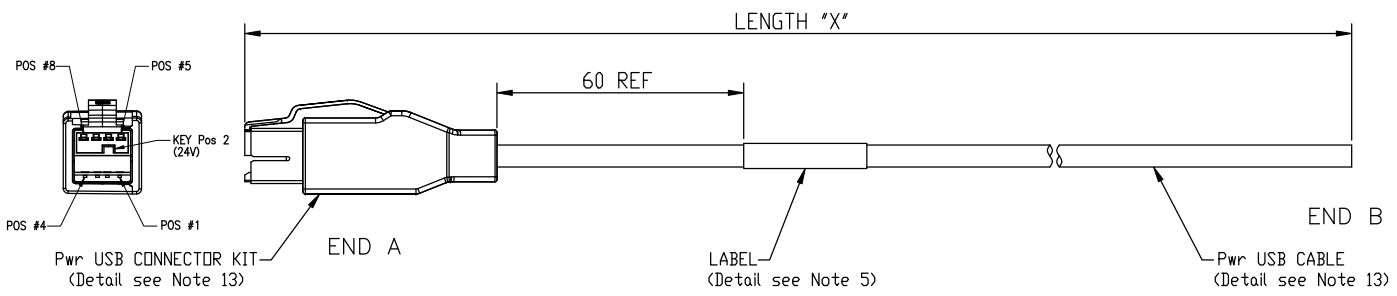

END A	SIGNAL NAME	WIRE COLOR	WIRE AWG	END B
1	VBUS (+5V)	RED	20	-
2	DATA -	WHITE	28	-
3	DATA +	GREEN	28	-
4	GND	BLACK	20	-
5	24V GND	BLUE	20	-
6	+24V	BROWN	20	-
7	+24V	ORANGE	20	-
8	24V GND	YELLOW	20	-
SHELL	FRAME GND	-	SHIELD	-

rev	ecn no	dr	date
A	N08-0120	ST	6/18/2008

Material	Spec ref	spec_ref	projection	MM
Mat code	surface	tolerance	ISO 406	← →
Heat treat	ISO 1302	ISO 1101	ISO 1101	
Plating/Finish	Dr Sunny Tsai	10/11/2007	Product family	CABLE ASS'Y
	Eng Sunny Tsai	10/11/2007	Model Name	ECN
	Chr Jackson Wang	10/11/2007	Model Revision	REL Level
	Appr Jackson Wang	10/11/2007	size	A3
	Scale	-	Rev.	A
FCI	title	SINGLE END POWER USB 24V CABLE ASSEMBLY - BLACK		dwg no
Pro/E file	catalog no	CUSTOMER DWG		sheet 1 of 3

TOLERANCES UNLESS OTHERWISE SPECIFIED			
LINEAR			
ANGULAR	0°	±2°	

FCI CONFIDENTIAL



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

1	2	3	4																																																																																									
FCI PART NO. SEE SHEET 1																																																																																												
NOTES:																																																																																												
13. COMPONENT DETAIL																																																																																												
A) Pwr USB CONNECTOR KIT:																																																																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">MATERIALS</th> <th style="width: 70%;">SPECIFICATIONS</th> </tr> </thead> <tbody> <tr> <td>SHELLS</td> <td>HIGH STRENGTH COPPER ALLOY</td> </tr> <tr> <td>HOUSINGS</td> <td>THERMOPLASTIC UL94V-0 RATED, COLOR: RED</td> </tr> <tr> <td>TERMINALS</td> <td>HIGH STRENGTH COPPER ALLOY</td> </tr> <tr> <td>COVERS</td> <td>THERMOPLASTIC UL94V-0 RATED PEBBLE GRAY</td> </tr> <tr> <td colspan="2">PLATING</td> </tr> <tr> <td>SHELL</td> <td>UNDERPLATE; 40 MICRONS NI 100 MICRONS MIN BRIGHT TIN</td> </tr> <tr> <td>TERMINALS</td> <td>UNDERPLATE; 40 MICRONS NI CONTACT AREA; 30 MICRONS GXT TAIL AREA; 100 MICRONS MATTED TIN</td> </tr> <tr> <td colspan="2">ELECTRICAL</td> </tr> <tr> <td>VOLTAGE RATING</td> <td>USB; 5.25VDC, +POWER; 24VDC</td> </tr> <tr> <td>DIELECTRIC WITHSTANDING VOLTAGE</td> <td>750 VAC</td> </tr> <tr> <td>INSUL. RESISTANCE</td> <td>1000 MEG OHMS AT 500 VDC</td> </tr> <tr> <td>CURRENT RATING(NOTE 1)</td> <td>1.50A USB SECTION 3.00A POWER SECTION</td> </tr> </tbody> </table>		MATERIALS	SPECIFICATIONS	SHELLS	HIGH STRENGTH COPPER ALLOY	HOUSINGS	THERMOPLASTIC UL94V-0 RATED, COLOR: RED	TERMINALS	HIGH STRENGTH COPPER ALLOY	COVERS	THERMOPLASTIC UL94V-0 RATED PEBBLE GRAY	PLATING		SHELL	UNDERPLATE; 40 MICRONS NI 100 MICRONS MIN BRIGHT TIN	TERMINALS	UNDERPLATE; 40 MICRONS NI CONTACT AREA; 30 MICRONS GXT TAIL AREA; 100 MICRONS MATTED TIN	ELECTRICAL		VOLTAGE RATING	USB; 5.25VDC, +POWER; 24VDC	DIELECTRIC WITHSTANDING VOLTAGE	750 VAC	INSUL. RESISTANCE	1000 MEG OHMS AT 500 VDC	CURRENT RATING(NOTE 1)	1.50A USB SECTION 3.00A POWER SECTION	B) Pwr USB CABLE: SPEC: 28AWG*1P+20AWG*6C+AL/MYLAR+DRAIN+BRAID 1) UL TYPE: CM CSA TYPE: CMG 2) CONSTRUCTION:																																																																
MATERIALS	SPECIFICATIONS																																																																																											
SHELLS	HIGH STRENGTH COPPER ALLOY																																																																																											
HOUSINGS	THERMOPLASTIC UL94V-0 RATED, COLOR: RED																																																																																											
TERMINALS	HIGH STRENGTH COPPER ALLOY																																																																																											
COVERS	THERMOPLASTIC UL94V-0 RATED PEBBLE GRAY																																																																																											
PLATING																																																																																												
SHELL	UNDERPLATE; 40 MICRONS NI 100 MICRONS MIN BRIGHT TIN																																																																																											
TERMINALS	UNDERPLATE; 40 MICRONS NI CONTACT AREA; 30 MICRONS GXT TAIL AREA; 100 MICRONS MATTED TIN																																																																																											
ELECTRICAL																																																																																												
VOLTAGE RATING	USB; 5.25VDC, +POWER; 24VDC																																																																																											
DIELECTRIC WITHSTANDING VOLTAGE	750 VAC																																																																																											
INSUL. RESISTANCE	1000 MEG OHMS AT 500 VDC																																																																																											
CURRENT RATING(NOTE 1)	1.50A USB SECTION 3.00A POWER SECTION																																																																																											
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">ITEM</th> <th colspan="3">SPECIFICATIONS</th> </tr> </thead> <tbody> <tr> <td rowspan="3">CONDUCTOR</td> <td>AWG</td> <td>28AWG</td> <td>20AWG</td> </tr> <tr> <td>MATERIAL</td> <td>TINNED COPPER</td> <td>TINNED COPPER</td> </tr> <tr> <td>COND.SIZE</td> <td>7/0.127mm</td> <td>19/0.20mm</td> </tr> <tr> <td rowspan="3">INSULATION</td> <td>MATERIAL</td> <td>HD-PE</td> <td>SR-PVC</td> </tr> <tr> <td>OD</td> <td>0.80±0.05mm</td> <td>1.5±0.05mm</td> </tr> <tr> <td>NO.</td> <td>1PAIR</td> <td>6C</td> </tr> <tr> <td rowspan="2">AL/MYLAR</td> <td>COVERAGE</td> <td colspan="2">100%</td> </tr> <tr> <td>OVERLAP</td> <td colspan="2">25% Min.</td> </tr> <tr> <td rowspan="3">DRAIN</td> <td>AWG</td> <td colspan="2">28AWG</td> </tr> <tr> <td>MATERIAL</td> <td colspan="2">TINNED COPPER</td> </tr> <tr> <td>COND.SIZE</td> <td colspan="2">7/0.127mm</td> </tr> <tr> <td rowspan="2">BRAID</td> <td>MATERIAL</td> <td colspan="2">TINNED COPPER</td> </tr> <tr> <td>SIZE</td> <td colspan="2">16/7/0.10mm</td> </tr> <tr> <td rowspan="3">JACKET</td> <td>MATERIAL</td> <td colspan="2">PVC</td> </tr> <tr> <td>OD</td> <td colspan="2">6.50±0.25mm</td> </tr> <tr> <td>COLOR</td> <td colspan="2">BLACK (OTHER COLORS AVAILABLE ON REQUEST)</td> </tr> <tr> <td colspan="4">ELECTRICAL CHARACTERISTICS</td> </tr> <tr> <td>RATING</td> <td colspan="2">RATING: TEMP 80°C</td> <td>VOLTAGE 30V</td> </tr> <tr> <td rowspan="2">Conductor Resistance at 20°C (MAX)</td> <td colspan="2">28AWG < 237.25 Ohm/KM</td> <td></td> </tr> <tr> <td colspan="2">20AWG < 34.6 Ohm/KM</td> <td></td> </tr> <tr> <td>IMPEDANCE (Differential)</td> <td colspan="3">90 Ohm±15%; at TDR</td> </tr> <tr> <td>DELAY</td> <td colspan="3">< 26ns/Cable; at TDR</td> </tr> <tr> <td>SKEW</td> <td colspan="3">100ps MAX.</td> </tr> <tr> <td>ATTENUATION</td> <td colspan="3">Refer to USB 2.0 Specification</td> </tr> </tbody> </table>		ITEM	SPECIFICATIONS			CONDUCTOR	AWG	28AWG	20AWG	MATERIAL	TINNED COPPER	TINNED COPPER	COND.SIZE	7/0.127mm	19/0.20mm	INSULATION	MATERIAL	HD-PE	SR-PVC	OD	0.80±0.05mm	1.5±0.05mm	NO.	1PAIR	6C	AL/MYLAR	COVERAGE	100%		OVERLAP	25% Min.		DRAIN	AWG	28AWG		MATERIAL	TINNED COPPER		COND.SIZE	7/0.127mm		BRAID	MATERIAL	TINNED COPPER		SIZE	16/7/0.10mm		JACKET	MATERIAL	PVC		OD	6.50±0.25mm		COLOR	BLACK (OTHER COLORS AVAILABLE ON REQUEST)		ELECTRICAL CHARACTERISTICS				RATING	RATING: TEMP 80°C		VOLTAGE 30V	Conductor Resistance at 20°C (MAX)	28AWG < 237.25 Ohm/KM			20AWG < 34.6 Ohm/KM			IMPEDANCE (Differential)	90 Ohm±15%; at TDR			DELAY	< 26ns/Cable; at TDR			SKEW	100ps MAX.			ATTENUATION	Refer to USB 2.0 Specification		
ITEM	SPECIFICATIONS																																																																																											
CONDUCTOR	AWG	28AWG	20AWG																																																																																									
	MATERIAL	TINNED COPPER	TINNED COPPER																																																																																									
	COND.SIZE	7/0.127mm	19/0.20mm																																																																																									
INSULATION	MATERIAL	HD-PE	SR-PVC																																																																																									
	OD	0.80±0.05mm	1.5±0.05mm																																																																																									
	NO.	1PAIR	6C																																																																																									
AL/MYLAR	COVERAGE	100%																																																																																										
	OVERLAP	25% Min.																																																																																										
DRAIN	AWG	28AWG																																																																																										
	MATERIAL	TINNED COPPER																																																																																										
	COND.SIZE	7/0.127mm																																																																																										
BRAID	MATERIAL	TINNED COPPER																																																																																										
	SIZE	16/7/0.10mm																																																																																										
JACKET	MATERIAL	PVC																																																																																										
	OD	6.50±0.25mm																																																																																										
	COLOR	BLACK (OTHER COLORS AVAILABLE ON REQUEST)																																																																																										
ELECTRICAL CHARACTERISTICS																																																																																												
RATING	RATING: TEMP 80°C		VOLTAGE 30V																																																																																									
Conductor Resistance at 20°C (MAX)	28AWG < 237.25 Ohm/KM																																																																																											
	20AWG < 34.6 Ohm/KM																																																																																											
IMPEDANCE (Differential)	90 Ohm±15%; at TDR																																																																																											
DELAY	< 26ns/Cable; at TDR																																																																																											
SKEW	100ps MAX.																																																																																											
ATTENUATION	Refer to USB 2.0 Specification																																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>rev</th> <th>ecn no</th> <th>dr</th> <th>date</th> </tr> </thead> <tbody> <tr> <td>-</td> <td>See Sheet 1</td> <td>-</td> <td>-</td> </tr> <tr> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>		rev	ecn no	dr	date	-	See Sheet 1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Dr</td> <td>Sunny Tsai</td> <td>10/11/2007</td> <td></td> </tr> <tr> <td>Eng</td> <td>Sunny Tsai</td> <td>10/11/2007</td> <td>Product family CABLE ASS'Y</td> </tr> <tr> <td>Chr</td> <td>Jackson Wang</td> <td>10/11/2007</td> <td>Model Name</td> </tr> <tr> <td>Appr</td> <td>Jackson Wang</td> <td>10/11/2007</td> <td>Model Revision</td> </tr> <tr> <td colspan="2"> </td> <td colspan="2"> SINGLE END POWER USB 24V CABLE ASSEMBLY - BLACK </td> </tr> <tr> <td>Pro/E file</td> <td>catalog no</td> <td>dwg no</td> <td>10084089</td> </tr> </table>		Dr	Sunny Tsai	10/11/2007		Eng	Sunny Tsai	10/11/2007	Product family CABLE ASS'Y	Chr	Jackson Wang	10/11/2007	Model Name	Appr	Jackson Wang	10/11/2007	Model Revision			SINGLE END POWER USB 24V CABLE ASSEMBLY - BLACK		Pro/E file	catalog no	dwg no	10084089																																	
rev	ecn no	dr	date																																																																																									
-	See Sheet 1	-	-																																																																																									
-	-	-	-																																																																																									
-	-	-	-																																																																																									
-	-	-	-																																																																																									
-	-	-	-																																																																																									
-	-	-	-																																																																																									
-	-	-	-																																																																																									
Dr	Sunny Tsai	10/11/2007																																																																																										
Eng	Sunny Tsai	10/11/2007	Product family CABLE ASS'Y																																																																																									
Chr	Jackson Wang	10/11/2007	Model Name																																																																																									
Appr	Jackson Wang	10/11/2007	Model Revision																																																																																									
		SINGLE END POWER USB 24V CABLE ASSEMBLY - BLACK																																																																																										
Pro/E file	catalog no	dwg no	10084089																																																																																									
TOLERANCES UNLESS OTHERWISE SPECIFIED		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>size</td> <td>A3</td> <td>Scale</td> <td>-</td> </tr> <tr> <td>projection</td> <td></td> <td>REL Level</td> <td></td> </tr> </table>		size	A3	Scale	-	projection		REL Level																																																																																		
size	A3	Scale	-																																																																																									
projection		REL Level																																																																																										
LINEAR		Rev. A																																																																																										
ANGULAR 0° 42°		CUSTOMER DWG sheet 3 of 3																																																																																										