

ELECTRIC DOUBLE LAYER CAPACITORS "EVerCAP®"

nichicon

JC

Snap-in Terminal Type

series


- Excellent in voltage holding property.
- Suitable for quick charge and discharge.
- Wide temperature range (-25°C to +60°C).
- Compliant to the RoHS directive (2002/95/EC).



■ Specifications

Item	Performance Characteristics							
Category Temperature Range	-25 to +60°C							
Rated Voltage Range	2.5V							
Rated Capacitance Range	15 to 150F See Note							
Capacitance Tolerance	$\pm 20\%$ (20°C)							
Leakage Current	0.5C (mA) [C : Rated Capacitance(F)] (After 30 minutes' application of rated voltage, 2.5V)							
Stability at Low Temperature	Capacitance (-25°C) / Capacitance (+20°C) $\times 100 \geq 70\%$							
ESR, DCR*	Refer to the list below (20°C). *DC internal resistance							
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 60°C.	<table border="1"> <tr> <td>Capacitance change</td> <td>Within $\pm 30\%$ of the initial capacitance value</td> </tr> <tr> <td>ESR</td> <td>300% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>	Capacitance change	Within $\pm 30\%$ of the initial capacitance value	ESR	300% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value
Capacitance change	Within $\pm 30\%$ of the initial capacitance value							
ESR	300% or less than the initial specified value							
Leakage current	Less than or equal to the initial specified value							
Shelf Life	The specifications listed at right shall be met when the capacitors are restored to 20°C after storing the capacitors under no load for 2000 hours at 60°C.	<table border="1"> <tr> <td>Capacitance change</td> <td>Within $\pm 30\%$ of the initial capacitance value</td> </tr> <tr> <td>ESR</td> <td>300% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>	Capacitance change	Within $\pm 30\%$ of the initial capacitance value	ESR	300% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value
Capacitance change	Within $\pm 30\%$ of the initial capacitance value							
ESR	300% or less than the initial specified value							
Leakage current	Less than or equal to the initial specified value							
Marking	Printed with white color letter on black sleeve.							


■ Drawing

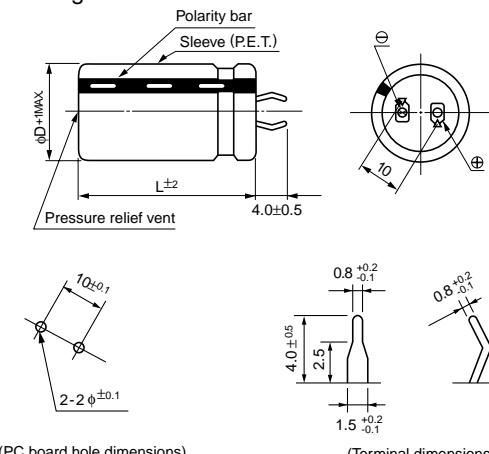

(PC board hole dimensions)

(Terminal dimensions)

Type numbering system (Example : 2.5V 150F)

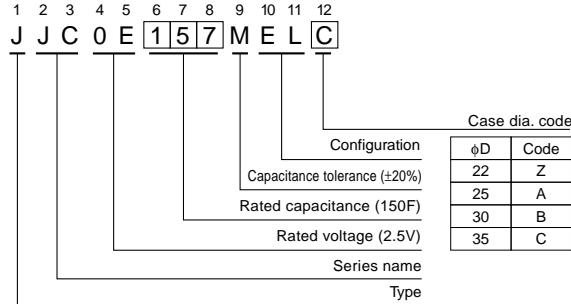

■ Dimensions

Rated Voltage (code)	Cap. code	ESR(mΩ) (at 1kHz)	DCR(mΩ)	Case size øD×L (mm)			
				ø 22 (Z)	ø 25 (A)	ø 30 (B)	ø 35 (C)
2.5V (0E)	15	156	120	500	22×20		
	18	186	120	400		25×20	
	22	226	90	300			30×20
	27	276	90	250	22×30		30×20
	33	336	80	200		25×30	35×20
	39	396	80	200	22×35	25×30	35×20
	47	476	70	160	22×40	25×35	
	56	566	70	140		25×40	30×30
	68	686	60	110			35×30
	82	826	60	100		25×50	30×40
	100	107	50	90			35×35
	120	127	50	70			35×40
	150	157	40	60			35×50

Note :

The capacitance calculated from discharge time (ΔT) with constant current (i) after 30minutte charge with rated voltage (2.5V).

The discharge current (i) is $0.01 \times F$ (rated capacitance). A discharge time (ΔT) measured between 2V and 1V with constant current.

The capacitance calculated bellow.

$$\text{Capacitance (F)} = i \times \Delta T$$

CAT.8100Y