3M[™] Shrunk Delta Ribbon (SDR) Cable Assembly

•

.80 mm High Speed Digital Data Transmission, 26 position

1MF26-L560-00C-XXX

TS-2121-C

Sheet 1 of 3

Supports new AIA Industrial Camera Link®

Standard for new Mini Link camera to C/L

11 shielded twisted twinax pairs with four

Double overall shield with inner foil and

See regulatory information appendix (RIA) for chemical compliance information

Rugged MDR ribbon contact type Rugged thumbscrew retention EMI shielded cable assembly

frame grabber applications

drain wires

outer braid

Date Modified: December 13, 2007



Physical

Connector Contact Plating:

tor Contact I lating.	
Wiping Area:	30 µ" [0.76 µm] Min Gold
Underplating:	100 μ" [2.55 μm] Nickel
Shell Options:	
	Beige (MDR), Black (SDR)
Material:	Overmolded option: Polyvinyl Chloride (PVC) & Acrylonitrile Butadiene Styrene (ABS)
Cable:	
Color:	Beige
Jacket Material:	Polyvinyl Chloride (PVC)
Flammability:	AWM VW-1
Marking:	3M Logo

Electrical

Voltage Rating:	30 V
Current Rating:	0.5 A
Insulation Resistance:	$1\times 10^8~\Omega$ min at 100 V_{DC}
Withstanding Voltage:	125 V_{AC} RMS for 1 minute

Environmental

Temperature Rating: 0°C to +70°C


UL File No.: E86982

3M Interconnect Solutions http://www.3M.com/interconnects/ Camera Link is a certification mark of Automated Imaging Association

3M[™] Shrunk Delta Ribbon (SDR) Cable Assembly

.80 mm High Speed Digital Data Transmission, 26 position

1MF26-L560-00C-XXX

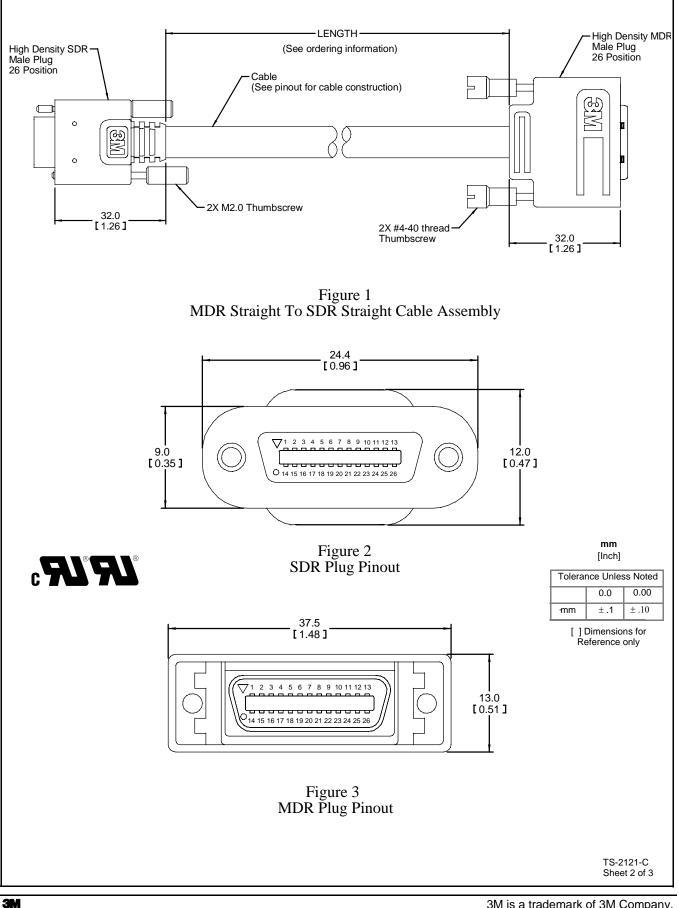

Interconnect Solutions http://www.3M.com/interconnects/

3M[™] Shrunk Delta Ribbon (SDR) Cable Assembly

.80 mm High Speed Digital Data Transmission, 26 position

1MF26-L560-00C-XXX

CN-1 Base Configuration CN-2 Conn. Full / Medium configuration Conn. Pos. Cable Pos. 2 XO- YO- TWINAX 1 YO- XO- 25 15 XO+ YO+ TWINAX 1 YO+ XO+ 12 3 X1- Y1- TWINAX 2 Y1+ X1+ 24 16 X1+ Y1+ TWINAX 3 Y2+ X2+ 23 17 X2+ Y2+ TWINAX 4 Y1+ X1+ 11 4 X2- Y2+ TWINAX 4 Y2+ X2+ 10 5 XC- Y2H Y2+ X2+ 10 Y2+ X2+ 10 5 XC- Y2H TWINAX 4 YCIk+ XC+ 9 6 X3- Y3+ TWINAX 6 TWINAX 6 100 ohm Set TC- 7 20 Set TC- Terminated TWINAX 7 ZO- Set TFG- <
Pos. Cable Pos. 2 XO- YO- TWINAX1 YO- XO- 25 15 XO+ YO+ TWINAX2 YO+ XO+ 12 3 X1- Y1- TWINAX2 Y1- X1- 24 16 X1+ Y1+ TWINAX2 Y1- X1- 24 16 X1+ Y1+ TWINAX2 Y1- X1- 24 16 X1+ Y1+ TWINAX3 Y2- X2- 23 17 X2+ Y2+ TWINAX4 Yclk- XC- 22 18 XC+ Yclk+ TWINAX4 Yclk- XC- 22 19 X3+ Y3+ TWINAX5 Y3+ X3+ 8 7 Ser TFG- Y0+ TWINAX6 Terminated Ser TC- 7 20 Ser TFG+ Z0+ TWINAX7 ZO+ Ser TFG+ 19 21 Ser TG+ Z0+ TWINAX8
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$
12CC4+Z3-TWINAX 11Z3-CC4+1525CC4-Z3+TWINAX 11Z3+CC4-2INNERINNERINNERINNERSHIELDSHIELD11SHIELDSHIELDSHIELDSHIELD1INNER14SHIELDSHIELDDRAIN WIRESHIELDSHIELD1413SHIELDSHIELDSHIELDSHIELD1313SHIELDSHIELDSHIELDSHIELD1326SHIELDSHIELDSHIELDSHIELD26ShellBRAID SHIELDSHIELDShellShellCable Assembly Wiring Diagram
25CC4-Z3+CC4-2INNERINNERINNER1SHIELDSHIELD1SHIELDSHIELD14SHIELDSHIELD13SHIELDSHIELD13SHIELDSHIELD26SHIELDSHIELDShellSHIELDBRAID SHIELDSHIELD26SHIELDShellShieldCable Assembly Wiring Diagram
INNERINNERINNER1SHIELDSHIELD1SHIELDSHIELD14SHIELDSHIELD13SHIELDSHIELD13SHIELDSHIELD14SHIELDSHIELD13SHIELDSHIELD14SHIELDSHIELD13SHIELDSHIELD14SHIELDSHIELD13SHIELDSHIELD14SHIELDSHIELD15SHIELDSHIELD16SHIELDSHIELD17SHIELDSHIELD18SHIELDSHIELD26SHIELDSHIELD26SHIELDSHIELD26SHIELDSHIELD27ShellSHIELD28SHIELDSHIELD29ShellShell
1SHIELDSHIELDSHIELD1INNERINNERINNERINNERINNERINNER14SHIELDSHIELDDRAIN WIRESHIELDSHIELD1413SHIELDSHIELDSHIELDINNERINNERINNER13SHIELDSHIELDSHIELDSHIELD1326SHIELDSHIELDSHIELDSHIELD26ShellSHIELDSHIELDSHIELDShellCable Assembly Wiring Diagram
INNERINNERINNER14SHIELDSHIELD14SHIELDSHIELD13SHIELDSHIELD13SHIELDSHIELD14INNERINNER15SHIELDSHIELD16SHIELDSHIELD17INNERINNER18SHIELDSHIELD19SHIELDSHIELD26SHIELDSHIELD26SHIELDSHIELDShellSHIELDShellCable Assembly Wiring Diagram
14 SHIELD SHIELD DRAIN WIRE SHIELD SHIELD 14 13 SHIELD SHIELD SHIELD INNER SHIELD SHIELD 13 13 SHIELD SHIELD SHIELD SHIELD SHIELD 13 14 INNER INNER INNER INNER SHIELD 13 15 INNER INNER SHIELD SHIELD 26 16 SHIELD SHIELD SHIELD SHIELD 26 17 Shell BRAID SHIELD Shell Shell
INNERINNERDRAIN WIREINNERINNER13SHIELDSHIELDSHIELDSHIELD1313INNERINNERINNERINNER26SHIELDSHIELDSHIELDSHIELD26ShellBRAID SHIELDShellShellCable Assembly Wiring Diagram
13SHIELDSHIELDSHIELD13INNERINNERINNERINNERINNER26SHIELDSHIELDSHIELDSHIELD26ShellShellBRAID SHIELDShellShellCable Assembly Wiring Diagram
INNERINNERINNERINNER26SHIELDSHIELDSHIELD26ShellBRAID SHIELDShellShellCable Assembly Wiring Diagram
26 SHIELD SHIELD SHIELD 26 Shell BRAID SHIELD Shell Shell Cable Assembly Wiring Diagram
ShellBRAID SHIELDShellCable Assembly Wiring Diagram
Cable Assembly Wiring Diagram
Cable Assembly Wiring Diagram
Table 1
Ordering Information 1MF26-L560-00C-XXX (RIA E1 & C1 apply)
Length: 100 = 1m 200 = 2m 500 = 5m A00 = 10m
Reference notes 1 & 2 for cable length tolerance
Notes: 1. For a cable length of less than 2m, the length tolerance is +50mm / -0mm TS-2 2. For a cable length of 2m or more, the length tolerance is +3% / -0% of cable length Sheet

Interconnect Solutions http://www.3M.com/interconnects/

Regulatory Information Appendix

3M Electronic Solutions Division/Interconnect

EUROPE

Appendix E1: European Union RoHS

Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical & Electronic Equipment, as amended by EU Commission Decision 2005/618/EC.

This product is RoHS Compliant 2005/95/EC.

"RoHS Compliant 2005/95/EC" means that the product or part ("Product") does not contain any of the substances in excess of the maximum concentration values in EU Directive 2002/95/EC, as amended by Commission Decision 2005/618/EC, unless the substance is in an application that is exempt under EU RoHS. Unless otherwise stated by 3M in writing, this information represents 3M's best knowledge and belief based upon information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M's Regulatory Information Appendix, then 3M's entire liability and Buyer's exclusive remedy will be in accordance with the Warranty stated below.

Appendix E2: European Union RoHS

Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical & Electronic Equipment, as amended by EU Commission Decision 2005/618/EC.

This product contains lead in the compliant pin area in excess of the maximum concentration value allowed but is compliant by exemption under EU Commission Decision 2005/747/EC.

"RoHS Compliant 2005/95/EC" means that the product or part ("Product") does not contain any of the substances in excess of the maximum concentration values in EU Directive 2002/95/EC, as amended by Commission Decision 2005/618/EC, unless the substance is in an application that is exempt under EU RoHS. Unless otherwise stated by 3M in writing, this information represents 3M's best knowledge and belief based upon information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M's Regulatory Information Appendix, then 3M's entire liability and Buyer's exclusive remedy will be in accordance with the Warranty stated below.

Appendix E3: European Union RoHS

Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical & Electronic Equipment as amended by Commission Decision 2005/618/EC.

This product contains lead in the solder tail area in excess of the maximum concentration value allowed.

Unless otherwise stated by 3M in writing, this information represents 3M's best knowledge and belief based upon information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M's Regulatory Information Appendix, then 3M's entire liability and Buyer's exclusive remedy will be in accordance with the Warranty stated below.

Appendix E4: European Union RoHS

Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical & Electronic Equipment, as amended by EU Commission Decision 2005/618/EC.

This product contains decaBDE in the insulating material in excess of the maximum concentration value allowed but is compliant by exemption under EU Commission Decision 2005/717/EC.

"RoHS Compliant 2005/95/EC" means that the product or part ("Product") does not contain any of the substances in excess of the maximum concentration values in EU Directive 2002/95/EC, as amended by Commission Decision 2005/618/EC, unless the substance is in an application that is exempt under EU RoHS. Unless otherwise stated by 3M in writing, this information represents 3M's best knowledge and belief based upon information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M's Regulatory Information Appendix, then 3M's entire liability and Buyer's exclusive remedy will be in accordance with the Warranty stated below.

Appendix E5: European Union RoHS

Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment, as amended by EU Commission Decision 2005/618/EC.

This product contains lead in excess of the maximum concentration value allowed but is compliant by exemption under Item 6 of the Annex to the Directive.

"RoHS Compliant 2005/95/EC" means that the product or part ("Product") does not contain any of the substances in excess of the maximum concentration values in EU Directive 2002/95/EC, as amended by Commission Decision 2005/618/EC, unless the substance is in an application that is exempt under EU RoHS. Unless otherwise stated by 3M in writing, this information represents 3M's best knowledge and belief based upon information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M's Regulatory Information Appendix, then 3M's entire liability and Buyer's exclusive remedy will be in accordance with the Warranty stated below.

CHINA Appendix C1: China RoHS

Electronic Industry Standard of the People's Republic of China, SJ/T11363-2006, Requirements for Concentration Limits for Certain Hazardous Substances in Electronic Information Products.

This symbol, per Marking for the Control of Pollution Caused by Electronic Information Products, SJ/T11364-2006, means that the product or part **does not** contain any of the following substances in excess of the following maximum concentration values in any homogeneous material: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated by 3M in writing, this information represents 3M's best knowledge and belief based upon information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M's Regulatory Information Appendix, then 3M's entire liability and Buyer's exclusive remedy will be in accordance with the Warranty stated below.

Appendix C2: China RoHS 🝕



Electronic Industry Standard of the People's Republic of China, SJ/T11363-2006, Requirements for Concentration Limits for Certain Hazardous Substances in Electronic Information Products.

This symbol, per Marking for the Control of Pollution Caused by Electronic Information Products, SJ/T11364-2006, means that the product or part **does** contain a substance, as detailed in the chart below, in excess of the following maximum concentration values in any homogeneous material: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated by 3M in writing, this information represents 3M's best knowledge and belief based upon information provided by third party suppliers to 3M.

The numerical reference in the symbol above should not be construed as a representation regarding the product's life or an extension of a product warranty. The product warranty is stated below. In the event any product is proven not to conform with 3M's Regulatory Information Appendix, then 3M's entire liability and Buyer's exclusive remedy will be in accordance with the product Warranty stated below.

产品中有毒有害物质或元素的名称及含量 Name and Content of Hazardous Substances or Elements

部件名称 有毒有害物质或元素 (Hazardous Substances or Elements)								
(Part or Component Name)	铅(Pb)	汞 (Hg)	镉 (Cd)	六价铬(Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)		
端子镀层(contact plating) × O O O O O								
 O: 表示该有毒有害物质在该部件所有均质材料中的含量均在SJ/T11363-2006 标准规定的限量要求以下。(Indicates that this hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in SJ/T11363-2006.) X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出SJ/T11363-2006 标准规定的限量要求。(Indicates that this hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in SJ/T11363-2006.) 								

Appendix C3: China RoHS 4

Electronic Industry Standard of the People's Republic of China, SJ/T11363-2006, Requirements for Concentration Limits for Certain Hazardous Substances in Electronic Information Products.

This symbol, per Marking for the Control of Pollution Caused by Electronic Information Products, SJ/T11364-2006, means that the product or part **does** contain a substance, as detailed in the chart below, in excess of the following maximum concentration values in any homogeneous material: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated by 3M in writing, this information represents 3M's best knowledge and belief based upon information provided by third party suppliers to 3M.

The numerical reference in the symbol above should not be construed as a representation regarding the product's life or an extension of a product warranty. The product warranty is stated below. In the event any product is proven not to conform with 3M's Regulatory Information Appendix, then 3M's entire liability and Buyer's exclusive remedy will be in accordance with the product Warranty stated below.

产品中有毒有害物质或元素的名称及含量 Name and Content of Hazardous Substances or Elements

部件名称	有毒有害物质或元素 (Hazardous Substances or Elements)						
(Part or Component Name)	铅(Pb)	汞 (Hg)	镉 (Cd)	六价铬(Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)	
合金(Metal alloy)	×	0	0	0	0	0	

O: 表示该有毒有害物质在该部件所有均质材料中的含量均在SJ/T11363-2006 标准规定的限量要求以下。(Indicates that this hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in SJ/T11363-2006.)

×:表示该有毒有害物质至少在该部件的某一均质材料中的含量超出SJ/T11363-2006 标准规定的限量要求。(Indicates that this hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in SJ/T11363-2006.)

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.



3M Electronics Interconnect Products 6801 River Place Blvd. Austin, TX 78726-9000 U.S.A. 1-800-225-5373 www.3m.com/interconnects

Please recycle. Printed in USA. © 3M 2007. All rights reserved. RIA-2217B-c