

This information is confidential and is disclosed to you on condition that no further disclosure is made by you to other than T&B Personnel without written authorization from THOMAS & BETTS INTERNATIONAL.


NUMBER
A2



FLEXSTRIP* JUMPERS

+ CONDUCTOR PITCH "A"	MARGIN C (min.)		THICKNESS D (MAX.)		PIN DIAMETER E $\pm 0,025 (\pm 0.001")$		NUMBER OF CONDUCTORS	
	mm	(inch.)	mm	(inch.)	mm	(inch.)		
1	1,27	.050"	0,25	.010"	0,64	.025"	0,320 .0126"	2 - 30
6	1,90	.075"	0,38	.015"	0,84	.033"	0,404 .0159"	2 - 30
2	2,54	.100"	0,51	.020"	0,84	.033"	0,511 .0201"	2 - 30
3	3,18	.125"	1,52	.060"	0,84	.033"	0,511 .0201"	2 - 25
4	3,81	.150"	1,52	.060"	0,84	.033"	0,511 .0201"	2 - 20
5	5,08	.200"	1,52	.060"	0,84	.033"	0,511 .0201"	2 - 15

2/86

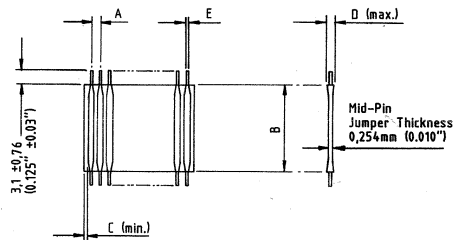


Dimensions are shown in mm (inches.)
+ Tolerance on Pitch $\pm 0,25 (0.01")$ non-cumulative.

INSULATION LENGTH B $\pm 1,57 (\pm 0.062")$		
mm	(inch)	Cat. Ref.
25,4	1	1
38,1	1 1/2	1,5
50,8	2	2
63,5	2 1/2	2,5
76,2	3	3
88,9	3 1/2	3,5
101,6	4	4
114,3	4 1/2	4,5
127	5	5
139,7	5 1/2	5,5
152,4	6	6

PROPERTIES :-
Insulation Material - Nomex*
Temperature Rating - 105°C
Current Rating - 2 amps
U.L. Style Number - 5188

NOTES:-
* Trademark of Thomas & Betts Corporation
* Registered trademark of E.I. Du Pont de Nemours

CATALOGUE NUMBERING SYSTEM

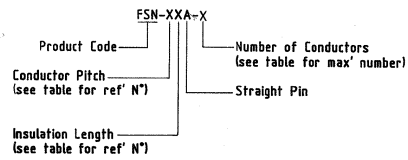

EXAMPLE:-

FSN -22A - 15

FSN - Flexstrip Jumper With Nomex Insulation
2 - Conductor Pitch 2.54 (0.100)
2 - Insulation Length 50.8 (2)
A - Straight Pin
15 - Number of Conductors 15

T&B THOMAS & BETTS INTERNATIONAL
EUROPEAN ENGINEERING DIVISION

DRG. N°
3S-10018

MATERIAL	PART NAME
HEAT TREAT	PRODUCT CODE
FINISH	TOLERANCES UNLESS OTHERWISE SPECIFIED
SCALE	FSN-26A-10
DWG. NO.	0-1437146-7
REV.	tyco Electronics REV 0 SH720F1

IMPERIAL DIMENSIONS SHOWN THUS []
TOLERANCES
0.000 EQUALS ± 0.002
0.001 EQUALS ± 0.003
0.002 EQUALS ± 0.005
THIRD ANGLE PROJECTION