

The **LTC<sup>®</sup>1329IS8-50** is available for the Industrial temperature range ( $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ ). The new specifications are shown below in **bold**. For complete specifications, typical performance characteristics and applications information, please see the **LTC1329** data sheet.

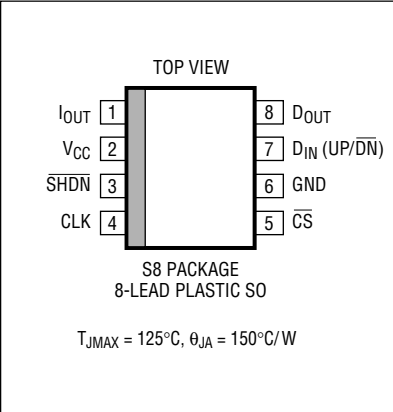
LT, LTC and LT are registered trademarks of Linear Technology Corporation.

## ABSOLUTE MAXIMUM RATINGS

(Note 1)

Supply Voltage ( $V_{CC}$ ) .....	7V
Input Voltage (All Inputs) .....	$-0.3\text{V}$ to $(V_{CC} + 0.3\text{V})$
Output Voltage	
$I_{OUT}$ .....	$-15\text{V}$ to $(V_{CC} + 0.3\text{V})$
$D_{OUT}$ .....	$-0.3\text{V}$ to $(V_{CC} + 0.3\text{V})$
Short-Circuit Duration (All Outputs) .....	Indefinite
Operating Temperature Range	
LTC1329C .....	$0^{\circ}\text{C}$ to $70^{\circ}\text{C}$
<b>LTC1329I</b> .....	<b><math>-40^{\circ}\text{C}</math> to <math>85^{\circ}\text{C}</math></b>
Storage Temperature Range .....	$-65^{\circ}\text{C}$ to $150^{\circ}\text{C}$
Lead Temperature (Soldering, 10 sec) .....	$300^{\circ}\text{C}$

## PACKAGE/ORDER INFORMATION

 <p>TOP VIEW</p> <p>S8 PACKAGE 8-LEAD PLASTIC SO</p> <p><math>T_{JMAX} = 125^{\circ}\text{C}</math>, <math>\theta_{JA} = 150^{\circ}\text{C/W}</math></p>	ORDER PART NUMBER
	LTC1329CS8-10 LTC1329CS8-50 LTC1329ACS8-50 <b>LTC1329IS8-50</b>
	S8 PART MARKING
	13291    1329A5 13295 <b>1329I5</b>

Consult factory for Military grade parts.

For further information regarding this specification notice contact:

Linear Technology Corporation  
 1630 McCarthy Blvd.  
 Milpitas, California 95035-7417  
 Attn: Product Marketing Manager  
 Phone: (408) 432-1900