

Low Jitter LVPECL Crystal Oscillator


Features

- Low Jitter Crystal Oscillator (XO)
- Less than 1 ps Typical RMS Phase Jitter
- Differential LVPECL Output
- Output Frequency from 50 MHz to 690 MHz
- Factory Configured or Field Programmable
- Integrated Phase-Locked Loop (PLL)
- Output Enable or Power Down Function
- Supply Voltage: 3.3V or 2.5V
- Pb-Free Package: 5.0 x 3.2 mm LCC
- Commercial and Industrial Temperature Ranges

Functional Description

The CY2X014 is a high performance and high frequency Crystal Oscillator (XO). The device uses a Cypress proprietary low noise PLL to synthesize the frequency from an embedded crystal.

The CY2X014 is available as a factory configured device or as a field programmable device.

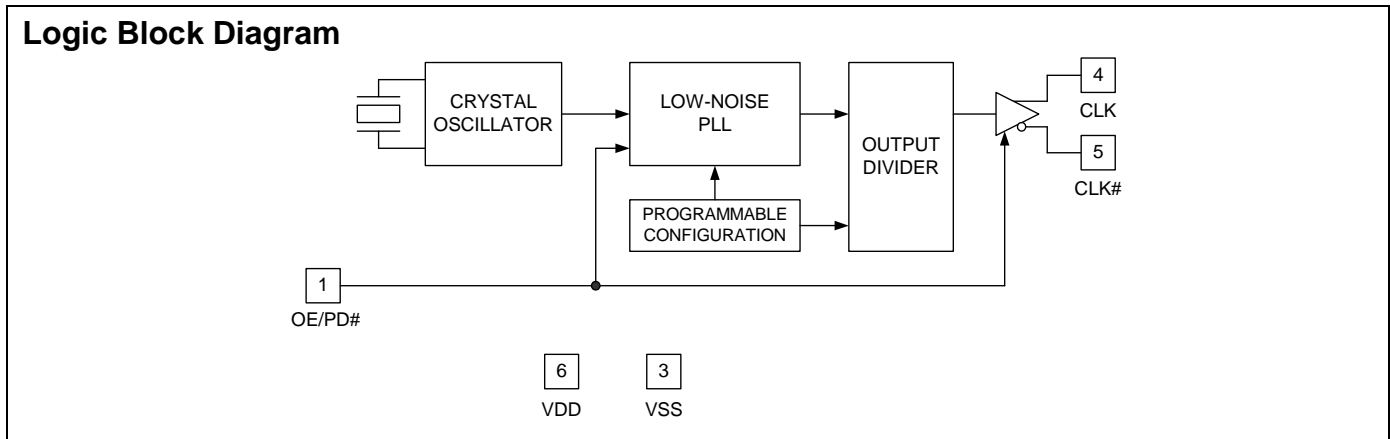

Pinouts

Figure 1. Pin Diagram – 6-Pin Ceramic LCC




Table 1. Pin Definitions

Pin	Name	I/O Type	Description
1	OE/PD#	CMOS Input	Output Enable Pin: Active HIGH. If OE = 1, CLK is enabled. Power Down Pin: Active LOW. If PD# = 0, the device is powered down and the clock is disabled. The functionality of this pin is programmable.
4, 5	CLK, CLK#	LVPECL Output	Differential Output Clock
2	DNU	–	Do Not Use: DNU pins are electrically connected, but perform no function
6	VDD	Power	Supply Voltage: 2.5V or 3.3V
3	VSS	Power	Ground

Programming Description

The CY2X014 is a programmable device. Before being used in an application, it must be programmed with the output frequencies and other variables described in a later section. Two different device types are available, each with its own programming flow. They are described in the following sections.

Field Programmable CY2X014F

Field programmable devices are shipped unprogrammed and must be programmed before being installed on a printed circuit board (PCB). Customers use CyberClocks™ Online Software to specify the device configuration and generate a JEDEC (extension .jed) programming file. Programming of samples and prototype quantities is available using a Cypress programmer. Third party vendors manufacture programmers for small to large volume applications. Cypress’s value added distribution partners also provide programming services. Field programmable devices are designated with an “F” in the part number. They are intended for quick prototyping and inventory reduction.

The software is located at www.cyberclocksonline.com.

Factory Configured CY2X014

For ready-to-use devices, the CY2X014 is available with no field programming required. All requests are submitted to the local Cypress Field Application Engineer (FAE) or sales representative. After the request is processed, you receive a new part number, samples, and datasheet with the programmed values. This part number is used for additional sample requests and production orders. The CY2X014 is One Time Programmable (OTP).

Programming Variables

Output Frequency

The CY2X014 can synthesize a frequency to a resolution of one part per million (ppm), but the actual accuracy of the output frequency is limited by the accuracy of the integrated reference crystal.

The CY2X014 has an output frequency range of 50 MHz to 690 MHz, but the range is not continuous. The CY2X014 cannot generate frequencies in the ranges of 521 MHz to 529 MHz and 596 MHz to 617 MHz.

Pin 1: Output Enable or Power Down (OE/PD#)

Pin 1 is programmed as either Output Enable (OE) or Power Down (PD#). The OE function is used to enable or disable the CLK output quickly, but it does not reduce core power consumption. The PD# function puts the device into a low power state, but the wake up takes longer because the PLL must reacquire lock.

Industrial vs. Commercial Device Performance

Industrial and Commercial devices have different internal crystals. They have a potentially significant impact on performance levels for applications requiring the lowest possible phase noise. CyberClocks Online Software displays expected performance for both options.

Phase Noise vs. Jitter Performance

In most cases, the device configuration for optimal phase noise performance is different from the device configuration for optimal cycle to cycle or period jitter. CyberClocks Online Software includes algorithms to optimize performance for either parameter.

Table 2. Device Programming Variables

Variable
Output Frequency
Pin 1 Function (OE or PD#)
Optimization (Phase Noise or Jitter)
Temperature Range (Commercial or Industrial)

Absolute Maximum Conditions

Parameter	Description	Condition	Min	Max	Unit
V_{DD}	Supply Voltage		-0.5	4.4	V
$V_{IN}^{[1]}$	Input Voltage, DC	Relative to V_{SS}	-0.5	$V_{DD}+0.5$	V
T_S	Temperature, Storage	Non operating	-55	135	°C
T_J	Temperature, Junction		-40	135	°C
ESD_{HBM}	ESD Protection (Human Body Model)	JEDEC STD 22-A114-B	2000		V
$\Theta_{JA}^{[2]}$	Thermal Resistance, Junction to Ambient	0 m/s airflow		64	°C/W

Operating Conditions

Parameter	Description	Min	Typ	Max	Unit
V_{DD}	3.3V Supply Voltage Range	3.0	3.3	3.6	V
	2.5V Supply Voltage Range	2.375	2.5	2.625	V
T_{PU}	Power Up Time for V_{DD} to Reach Minimum Specified Voltage (Power Ramp is Monotonic)	0.05	-	500	ms
T_A	Ambient Temperature (Commercial)	0	-	70	°C
	Ambient Temperature (Industrial)	-40	-	85	°C

DC Electrical Characteristics

Parameter	Description	Condition	Min	Typ	Max	Unit
$I_{DD}^{[3]}$	Operating Supply Current	$V_{DD} = 3.6V$, CLK = 150 MHz, OE/PD# = V_{DD} , output terminated	-	-	150	mA
		$V_{DD} = 2.625V$, CLK = 150 MHz, OE/PD# = V_{DD} , output terminated	-	-	145	mA
I_{SB}	Standby Supply Current	PD# = V_{SS}	-	-	200	μA
V_{OH}	LVPECL High Output Voltage	$V_{DD} = 3.3V$ or 2.5V, $R_{TERM} = 50\Omega$ to $V_{DD} - 2.0V$	$V_{DD} - 1.15$	-	$V_{DD} - 0.75$	V
V_{OL}	LVPECL Low Output Voltage	$V_{DD} = 3.3V$ or 2.5V, $R_{TERM} = 50\Omega$ to $V_{DD} - 2.0V$	$V_{DD} - 2.0$	-	$V_{DD} - 1.625$	V
V_{OD1}	LVPECL Output Voltage Swing ($V_{OH} - V_{OL}$)	$V_{DD} = 3.3V$ or 2.5V, $R_{TERM} = 50\Omega$ to $V_{DD} - 2.0V$	600	-	1000	mV
V_{OD2}	LVPECL Output Voltage Swing ($V_{OH} - V_{OL}$)	$V_{DD} = 2.5V$, $R_{TERM} = 50\Omega$ to $V_{DD} - 1.5V$	500	-	1000	mV
V_{OCM}	LVPECL Output Common Mode Voltage ($V_{OH} + V_{OL}$)/2	$V_{DD} = 2.5V$, $R_{TERM} = 50\Omega$ to $V_{DD} - 1.5V$	1.2	-	-	V
I_{OZ}	LVPECL Output Leakage Current	PD#/OE = V_{SS}	-35	-	35	μA
V_{IH}	Input High Voltage		$0.7 \cdot V_{DD}$	-	-	V
V_{IL}	Input Low Voltage		-	-	$0.3 \cdot V_{DD}$	V
I_{IH}	Input High Current	Input = V_{DD}	-	-	115	μA
I_{IL}	Input Low Current	Input = V_{SS}	-	-	50	μA
C_{IN}	Input Capacitance		-	15	-	pF

Notes

1. The voltage on any input or I/O pin cannot exceed the power pin during power up.
2. Simulated. The board is derived from the JEDEC multilayer standard. It measures 76 x 114 x 1.6 mm and has 4-layers of copper (2/1/1/2 oz.). The internal layers are 100% copper planes, while the top and bottom layers have 50% metalization. No vias are included in the model.
3. I_{DD} includes ~24 mA of current that is dissipated externally in the output termination resistors.



AC Electrical Characteristics

The AC Electrical Characteristics for part CY2X014 are as follows [4]

Parameter	Description	Condition	Min	Typ	Max	Unit
F _{OUT}	Output Frequency ^[6]		50	–	690	MHz
FSC	Frequency Stability, Commercial Devices ^[5]	V _{DD} = min to max, T _A = 0°C to 70°C	–	–	±35	ppm
FSI	Frequency Stability, Industrial Devices ^[5]	V _{DD} = min to max, T _A = –40° to 85°C	–	–	±55	ppm
AG	Aging, 10 Years		–	–	±15	ppm
T _{DC}	Output Duty Cycle	F ≤ 450 MHz, measured at zero crossing	45	50	55	%
		F > 450 MHz, measured at zero crossing	40	50	60	%
T _R , T _F	Output Rise and Fall Time	20% and 80% of full output swing	0.2	0.4	1.0	ns
T _{OHZ}	Output Disable Time	Time from falling edge on OE to stopped outputs (Asynchronous)	–	–	100	ns
T _{OE}	Output Enable Time	Time from rising edge on OE to outputs at a valid frequency (Asynchronous)	–	–	100	ns
T _{LOCK}	Startup Time	Time for CLK to reach valid frequency measured from the time V _{DD} = V _{DD} (min.) or from PD# rising edge	–	–	10	ms
T _{Jitter(φ)}	RMS Phase Jitter (Random)	F _{OUT} = 106.25 MHz (12 kHz to 20 MHz)	–	1	–	ps

Typical Output Characteristics

Figure 2. 2.5V Supply and Termination to V_{DD}–1.5V, Minimum V_{DD} and Maximum T_A

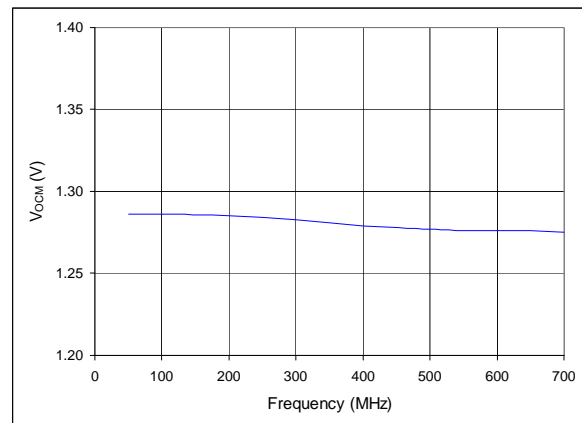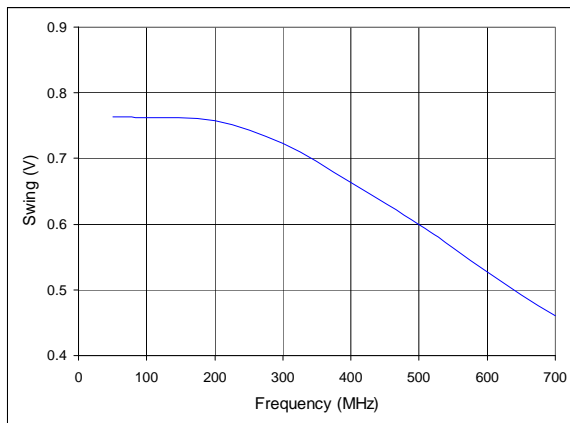

Notes

4. Not 100% tested, guaranteed by design and characterization.
5. Frequency stability is the maximum variation in frequency from F₀. It includes initial accuracy, and variation from temperature and supply voltage.
6. This parameter is specified in CyberClocks Online software

Figure 3. 2.5V Supply and Termination to $V_{DD}-2V$, Minimum V_{DD} and Maximum T_A




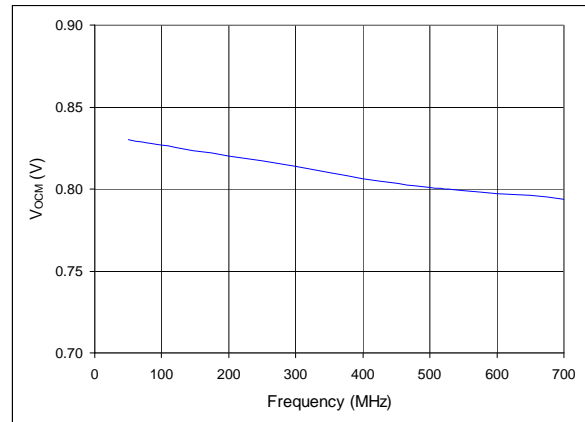


Figure 4. 3.3V Supply and Termination to $V_{DD}-2V$, Minimum V_{DD} and Maximum T_A

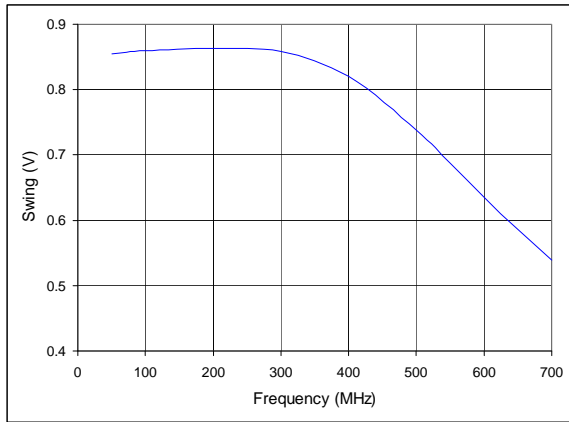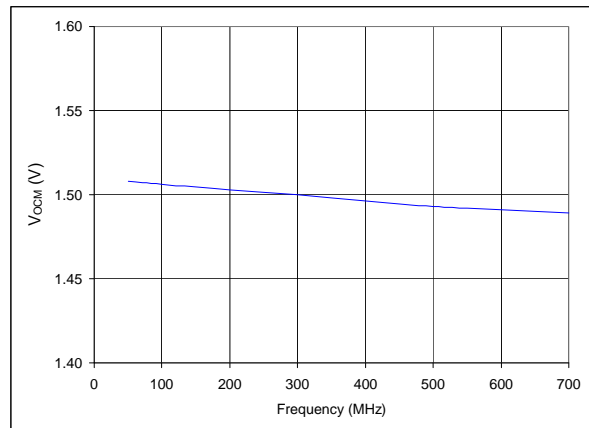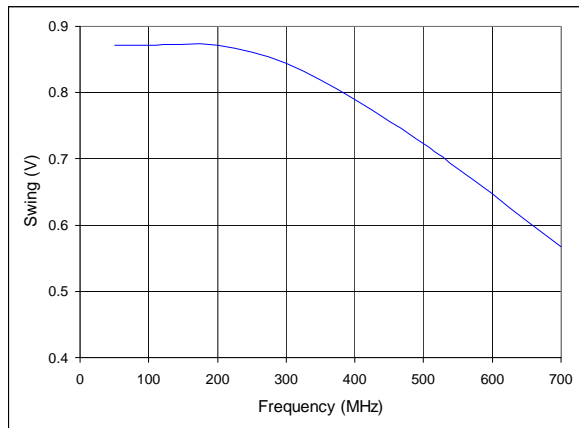

Switching Waveforms

Figure 5. Output DC Parameters




Figure 6. Duty Cycle Timing

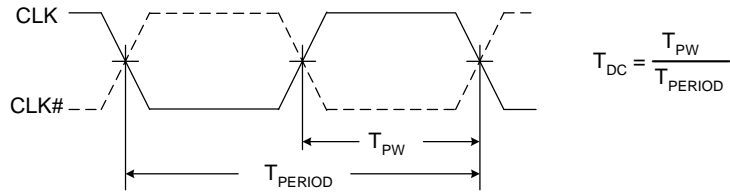


Figure 7. Output Rise and Fall Time



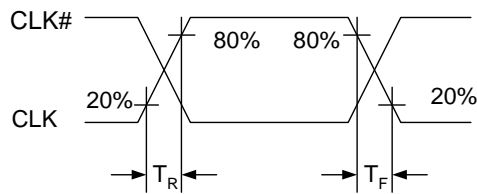


Figure 8. Output Enable and Disable Timing

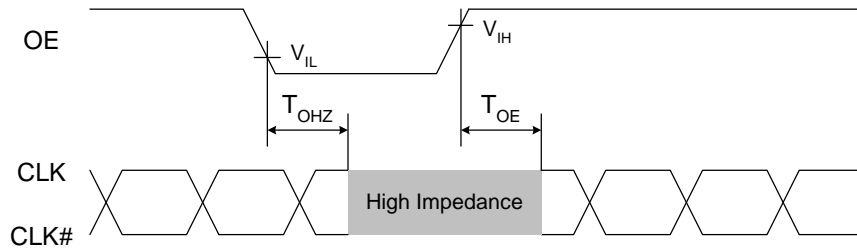

Termination Circuits

Figure 9. LVPECL Termination

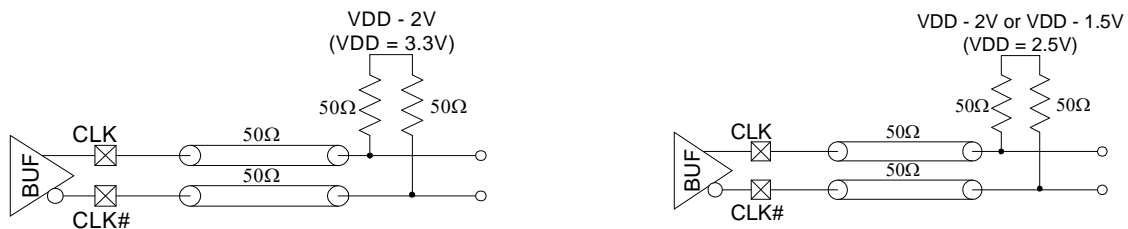


Ordering Information

Part Number ^[7]	Configuration	Package Description	Product Flow
Pb-Free			
CY2X014FLXCT	Field Programmable	6-Pin Ceramic LCC SMD - Tape and Reel	Commercial, 0° to 70°C
CY2X014FLXIT	Field Programmable	6-Pin Ceramic LCC SMD - Tape and Reel	Industrial, -40° to 85°C
CY2X014LXCxxxT	Factory Configured	6-Pin Ceramic LCC SMD - Tape and Reel	Commercial, 0° to 70°C
CY2X014LXLxxxT	Factory Configured	6-Pin Ceramic LCC SMD - Tape and Reel	Industrial, -40° to 85°C

Package Diagram

Figure 10. 6-Pin 3.2x5.0 mm Ceramic LCC LZ06A

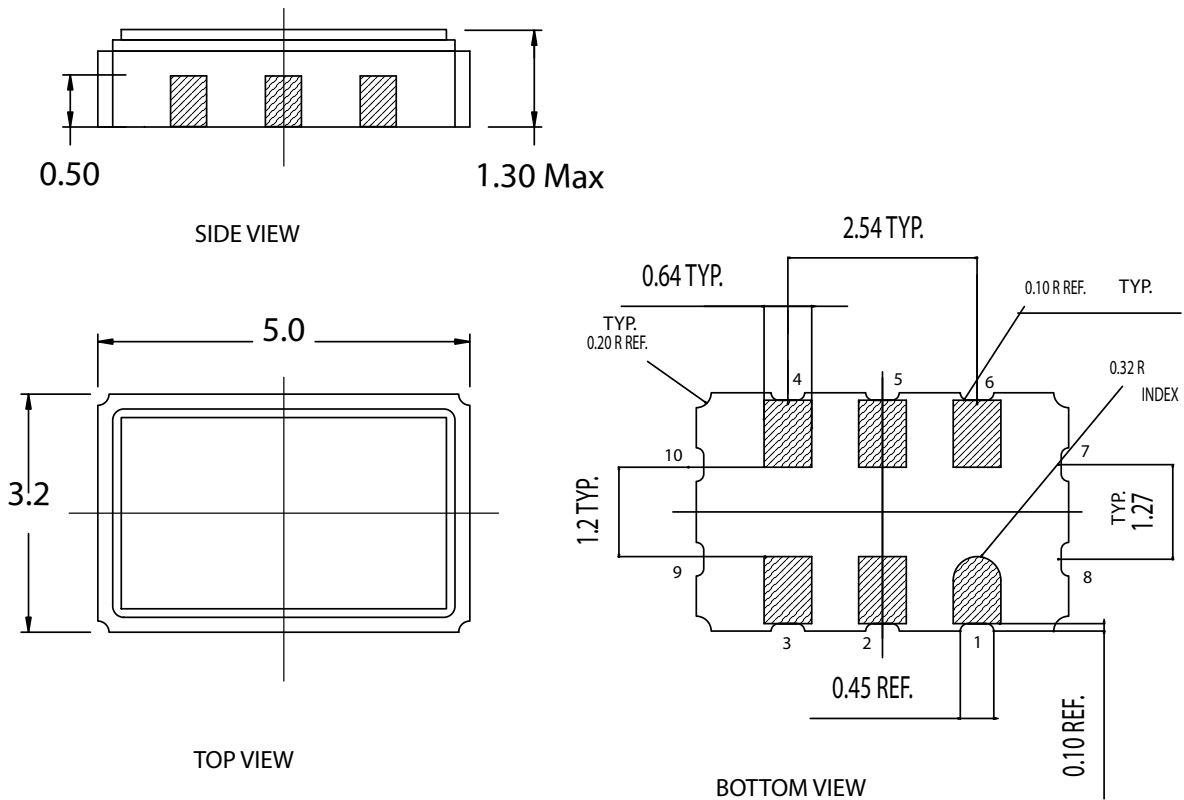

Dimensions in mm
 General Tolerance: ± 0.15MM
 Kyocera dwg ref KD-VA6432-A
 Package Weight ~ 0.12 grams

001-10044**

Note

7. "xxx" is a factory assigned code that identifies the programming option.

Document History Page

Document Title: CY2X014 Low Jitter LVPECL Crystal Oscillator Document Number: 001-10179				
Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	504478	RGL	See ECN	New datasheet
*A	1428603	JWK/SFV	See ECN	Removed pull up on pin 1 and related specifications, Added items to Programming Variables section, Added C _{IN} specification, Modified t _{J2} , I _{IH} , I _{IL} , I _{DD} and I _{SB} specifications, Changed to a single Frequency Stability specification, Removed Peak-to-peak Period Jitter specification, Changed pin 2 from NC to DNU, Changed max storage temperature, Title change, 2.5V supply tightened from ±10% to ±5%, 2.5V termination option changed from VDD-1.4V to VDD-1.5V, Added typical output characteristic curves
*B	2669117	KVM/AESA	03/05/09	Revised frequency stability and aging specs and conditions, Max frequency changed from 700 MHz to 690 MHz, Duty cycle changed from 45/55 to 40/60 for freq > 450 MHz, Removed reference to CY3672 programmer, Junction and storage temperatures changed from 125 to 135°C, I _{IH} changed from 20 µA to 115 µA, I _{IL} changed from 20 µA to 50 µA, Rise and fall times changed from 350 ps to 500 ps, Removed MSL spec, Changed Datasheet Status to Final.
*C	2701663	KVM/PYRS	05/06/09	General clean up Added explanation of gaps in the frequency range Added URL for software Removed frequency stability paragraph under Programming Variables Added programming variables table Added separate IDD spec for 2.5V supply Changed the amount of load current in IDD footnote Changed phase jitter parameter name Removed supply voltage as a programming variable Changed conditions for ESD spec Changed rise and fall times from 500 ps to 400 ps typ, added min and max
*D	2718433	WWZ/HMT	06/12/09	No change. Submit to ECN for product launch.
*E	2761943	KVM	09/10/09	Revised maximum output rise and fall times.

Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at cypress.com/sales.

Products

PSoC	psoc.cypress.com
Clocks & Buffers	clocks.cypress.com
Wireless	wireless.cypress.com
Memories	memory.cypress.com
Image Sensors	image.cypress.com

© Cypress Semiconductor Corporation, 2007-2009. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.