

Quad Line Receiver


General Description

The DS1489/DS1489A are quad line receivers designed to interface data terminal equipment with data communications equipment. They are constructed on a single monolithic silicon chip. These devices satisfy the specifications of EIA Standard RS-232D. The DS1489/DS1489A meet and exceed the specifications of MC1489/MC1489A and are pin-for-pin replacements.

Features


- Four separate receivers per package
- Programmable threshold
- Built-in input threshold hysteresis
- "Fail safe" operating mode: high output for open inputs
- Inputs withstand $\pm 30V$

Schematic and Connection Diagrams

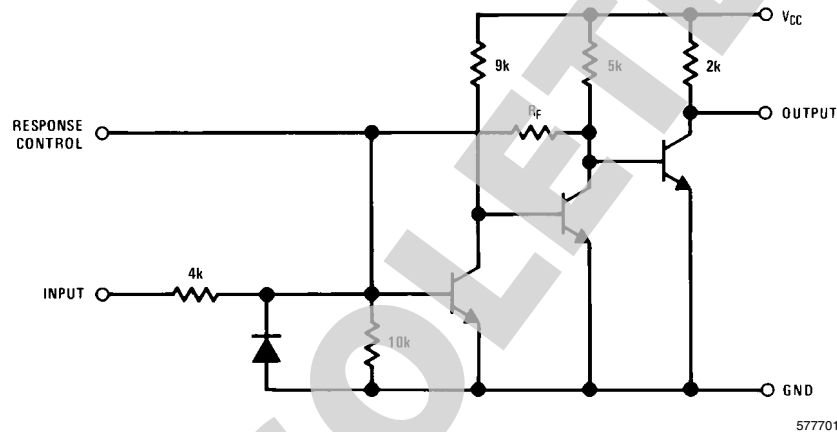

(1/4 of unit shown)
DS1489: $R_F = 10k$
DS1489A: $R_F = 2k$

Dual-In-Line or Small-Out Line Package

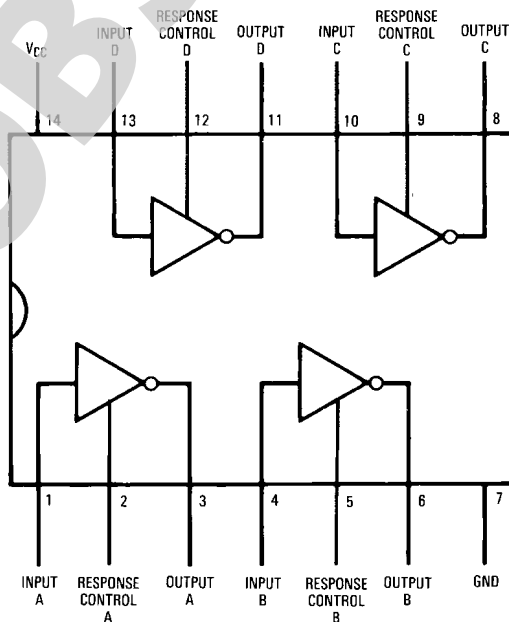

Top View

Order Number DS1489M, DS1489MX, DS1489N, DS1489AM, DS1489AMX or DS1489AN
See NS Package Number M14A or N14A

AC Test Circuit and Voltage Waveforms

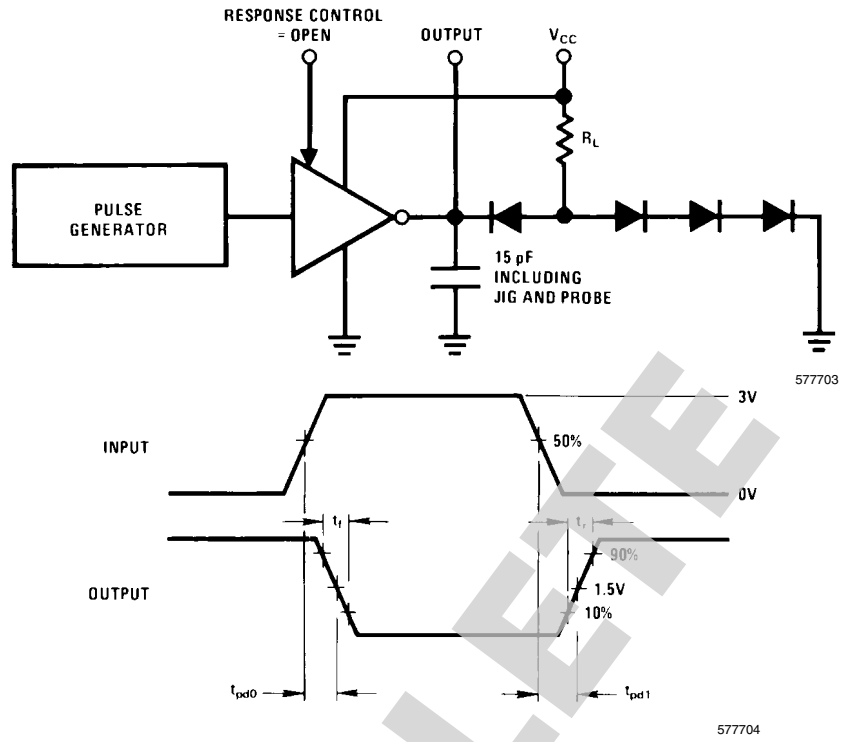


FIGURE 1.

Absolute Maximum Ratings *(Note 2)*

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

| | | | |
|-----------------------------------|-----------------|---|---------|
| Power Supply Voltage | 10V | Maximum Power Dissipation <i>(Note 1)</i> at 25°C | |
| Input Voltage Range | ±30V | Molded DIP Package | 1207 mW |
| Output Load Current | 20 mA | SO Package | 1042 mW |
| Power Dissipation <i>(Note 3)</i> | 1W | Lead Temperature (Soldering, 4 sec.) | 260°C |
| Operating Temperature Range | 0°C to +75°C | | |
| Storage Temperature Range | -65°C to +150°C | | |

Note 1: Derate molded DIP package 9.7 mW/°C above 25°C; derate SO package 8.33 mW/°C above 25°C.

Electrical Characteristics *(Note 3, Note 4, Note 5)*

DS1489/DS1489A: The following apply for $V_{CC} = 5.0V \pm 1\%$, $0^\circ C \leq T_A \leq +75^\circ C$ unless otherwise specified.

| Symbol | Parameter | Conditions | Min | Typ | Max | Units | | |
|----------|------------------------------|--|--------------------|--------------------|-------|-------|------|------|
| V_{TH} | Input High Threshold Voltage | $V_{OUT} \leq 0.45V$, $I_{OUT} = 10 \text{ mA}$ | DS1489 | $T_A = 25^\circ C$ | 1.0 | 1.25 | 1.5 | V |
| | | | | | 0.9 | | 1.6 | V |
| | | DS1489A | $T_A = 25^\circ C$ | | 1.75 | 2.00 | 2.25 | V |
| | | | | | | 1.55 | | 2.40 |
| V_{TL} | Input Low Threshold Voltage | $V_{OUT} \geq 2.5V$, $I_{OUT} = -0.5 \text{ mA}$ | | $T_A = 25^\circ C$ | 0.75 | 1.00 | 1.25 | V |
| | | | | | 0.65 | | 1.35 | V |
| I_{IN} | Input Current | $V_{IN} = +25V$ | | +3.6 | +5.6 | +8.3 | mA | |
| | | $V_{IN} = -25V$ | | -3.6 | -5.6 | -8.3 | mA | |
| | | $V_{IN} = +3V$ | | +0.43 | +0.53 | | mA | |
| | | $V_{IN} = -3V$ | | -0.43 | -0.53 | | mA | |
| V_{OH} | Output High Voltage | $I_{OUT} = -0.5 \text{ mA}$ | $V_{IN} = 0.75V$ | | 2.6 | 3.8 | 5.0 | V |
| | | | Input = Open | | 2.6 | 3.8 | 5.0 | V |
| V_{OL} | Output Low Voltage | $V_{IN} = 3.0V$, $I_{OUT} = 10 \text{ mA}$ | | 0.33 | 0.45 | V | | |
| I_{SC} | Output Short Circuit Current | $V_{IN} = 0.75V$ | | -3.0 | | mA | | |
| I_{CC} | Supply Current | $V_{IN} = 5.0V$ | | 14 | 26 | mA | | |
| P_d | Power Dissipation | $V_{IN} = 5.0V$ | | 70 | 130 | mW | | |

Switching Characteristics

$V_{CC} = 5V$, $T_A = 25^\circ C$

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-----------|--|---|-----|-----|-----|-------|
| t_{pd1} | Input to Output "High" Propagation Delay | $R_L = 3.9k$, <i>(Figure 1)</i> (AC Test Circuit) | | 28 | 85 | ns |
| t_{pd0} | Input to Output "Low" Propagation Delay | $R_L = 390\Omega$, <i>(Figure 1)</i> (AC Test Circuit) | | 20 | 50 | ns |
| t_r | Output Rise Time | $R_L = 3.9k$, <i>(Figure 1)</i> (AC Test Circuit) | | 110 | 175 | ns |
| t_f | Output Fall Time | $R_L = 390\Omega$, <i>(Figure 1)</i> (AC Test Circuit) | | 9 | 20 | ns |

Note 2: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.


Note 3: Unless otherwise specified min/max limits apply across the 0°C to +75°C temperature range for the DS1489 and DS1489A.

Note 4: All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.

Note 5: These specifications apply for response control pin = open.


Typical Characteristics

$V_{CC} = 5.0V, T_A = +25^\circ C$ unless otherwise noted

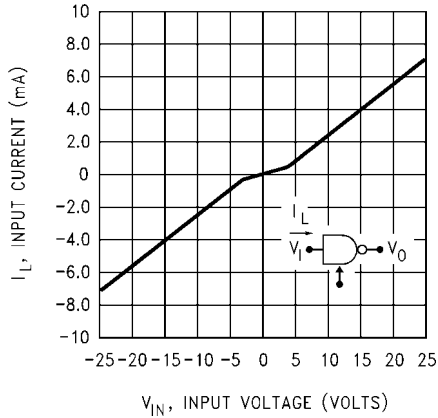


577707

FIGURE 2. Input Current

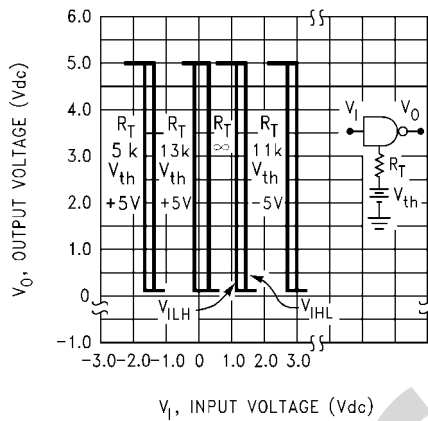


577708

FIGURE 3. DS1489 Input Threshold Voltage Adjustment

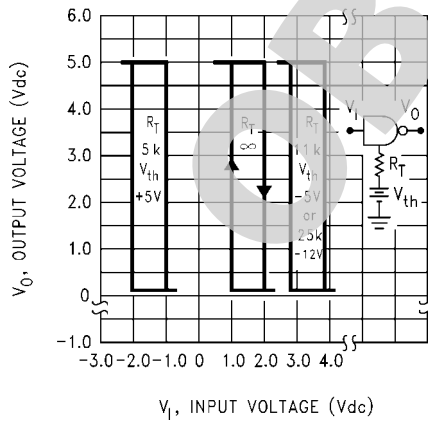


577709

FIGURE 4. DS1489A Input Threshold Voltage Adjustment

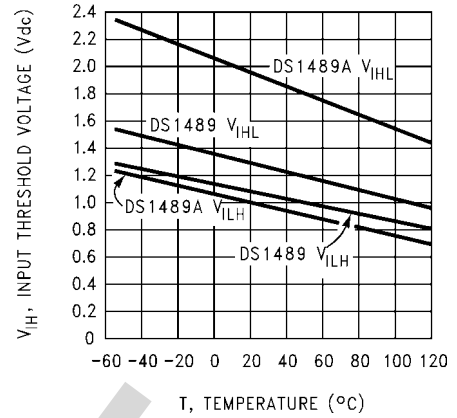


577710

FIGURE 5. Input Threshold Voltage vs Temperature

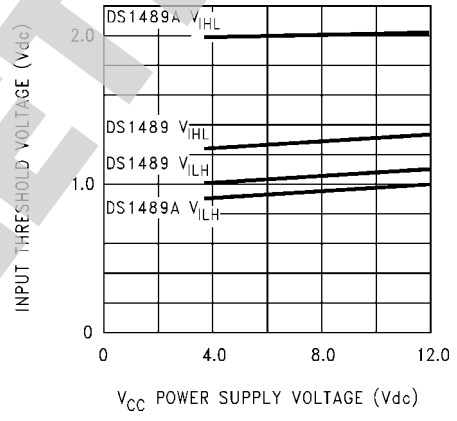

577711


FIGURE 6. Input Threshold vs Power Supply Voltage

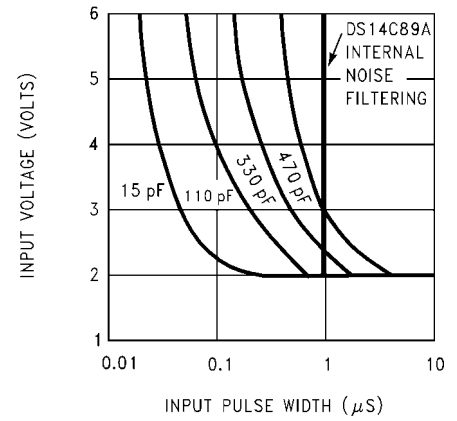

577712

FIGURE 7. Noise Rejection vs Capacitance for DS1489A

Typical Application Information

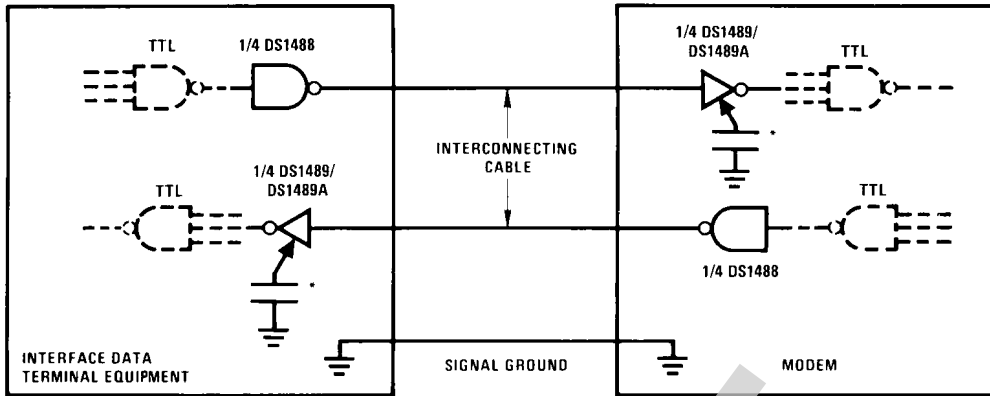


577705

*Optional for noise filtering.


Applications Using the Response Control Pin

Noise Filter
See Figure 7




577713

Threshold Shift
See Figures 3, 4




577714

Noise Filter and Threshold Shift
See Figures 3, 4, 7






577715

Application of DS1488, DS1489A and UART

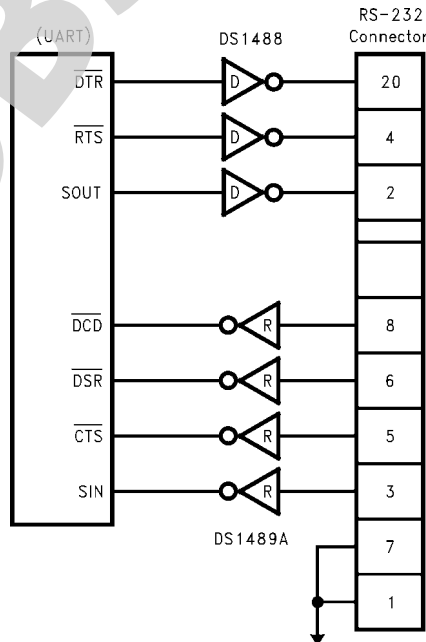



577716

Physical Dimensions inches (millimeters) unless otherwise noted

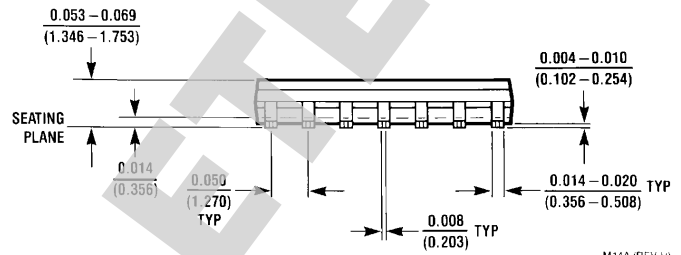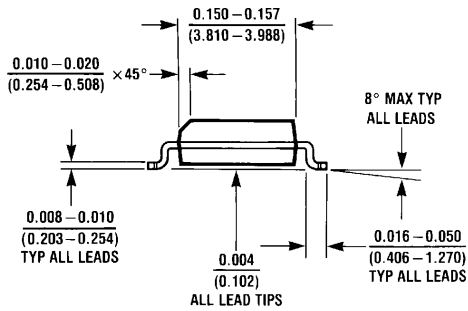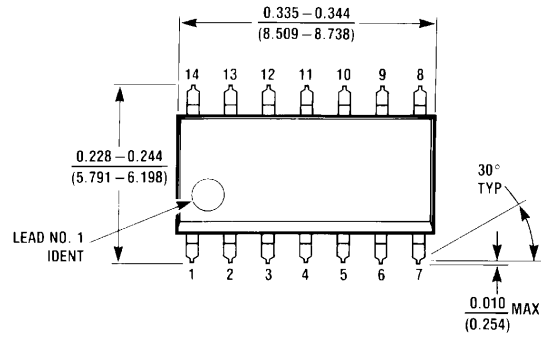



M14A (REV H)

SO Package (M)
 Order Number DS1489M, DS1489MX or DS1489AM, DS1489AMX
 NS Package Number M14A

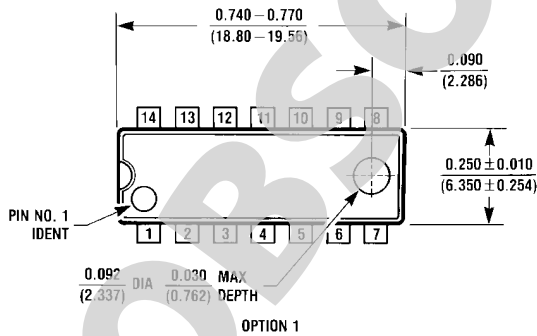

OPTION 1

OPTION 2

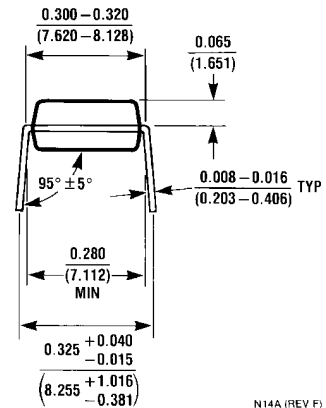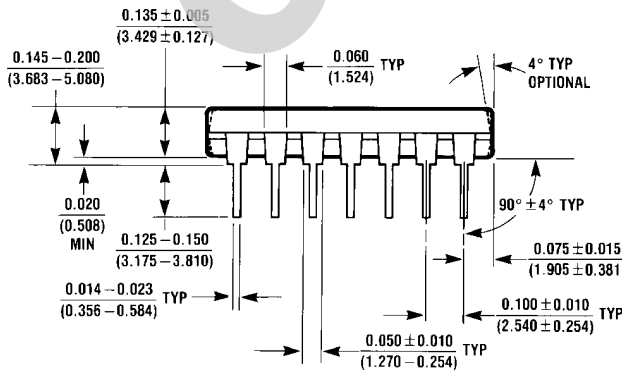

N14A (REV F)

Molded Dual-In-Line Package (N)
 Order Number DS1489N or DS1489AN
 NS Package Number N14A

OBSOLETE

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:
www.national.com

| Products | | Design Support | |
|--------------------------------|--|------------------------------|--|
| Amplifiers | www.national.com/amplifiers | WEBENCH® Tools | www.national.com/webench |
| Audio | www.national.com/audio | App Notes | www.national.com/appnotes |
| Clock and Timing | www.national.com/timing | Reference Designs | www.national.com/refdesigns |
| Data Converters | www.national.com/adc | Samples | www.national.com/samples |
| Interface | www.national.com/interface | Eval Boards | www.national.com/evalboards |
| LVDS | www.national.com/lvds | Packaging | www.national.com/packaging |
| Power Management | www.national.com/power | Green Compliance | www.national.com/quality/green |
| Switching Regulators | www.national.com/switchers | Distributors | www.national.com/contacts |
| LDOs | www.national.com/lido | Quality and Reliability | www.national.com/quality |
| LED Lighting | www.national.com/led | Feedback/Support | www.national.com/feedback |
| Voltage References | www.national.com/vref | Design Made Easy | www.national.com/easy |
| PowerWise® Solutions | www.national.com/powerwise | Applications & Markets | www.national.com/solutions |
| Serial Digital Interface (SDI) | www.national.com/sdi | Mil/Aero | www.national.com/milaero |
| Temperature Sensors | www.national.com/tempensors | SolarMagic™ | www.national.com/solarmagic |
| PLL/VCO | www.national.com/wireless | PowerWise® Design University | www.national.com/training |

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY


NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2010 National Semiconductor Corporation

For the most current product information visit us at www.national.com

 **National Semiconductor Americas Technical Support Center**
 Email: support@nsc.com
 Tel: 1-800-272-9959

National Semiconductor Europe Technical Support Center
 Email: europe.support@nsc.com

National Semiconductor Asia Pacific Technical Support Center
 Email: ap.support@nsc.com

National Semiconductor Japan Technical Support Center
 Email: jpn.feedback@nsc.com