

DM74S373 • DM74S374

3-STATE Octal D-Type Transparent Latches and Edge-Triggered Flip-Flops

General Description

These 8-bit registers feature totem-pole 3-STATE outputs designed specifically for driving highly-capacitive or relatively low-impedance loads. The high-impedance state and increased high-logic-level drive provide these registers with the capability of being connected directly to and driving the bus lines in a bus-organized system without need for interface or pull-up components. They are particularly attractive for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.

The eight latches of the DM74S373 are transparent D-type latches meaning that while the enable (G) is HIGH the Q outputs will follow the data (D) inputs. When the enable is taken LOW the output will be latched at the level of the data that was set up.

The eight flip-flops of the DM74S374 are edge-triggered D-type flip-flops. On the positive transition of the clock, the Q outputs will be set to the logic states that were set up at the D inputs.

Schmitt-trigger buffered inputs at the enable/clock lines simplify system design as ac and dc noise rejection is improved by typically 400 mV due to the input hysteresis. A buffered output control input can be used to place the eight outputs in either a normal logic state (HIGH or LOW logic levels) or a high-impedance state. In the high-impedance state the outputs neither load nor drive the bus lines significantly.

The output control does not affect the internal operation of the latches or flip-flops. That is, the old data can be retained or new data can be entered even while the outputs are OFF.

Features



- Choice of 8 latches or 8 D-type flip-flops in a single package
- 3-STATE bus-driving outputs
- Full parallel-access for loading
- Buffered control inputs
- P-N-P input reduce D-C loading on data lines

Ordering Code:

| Order Number | Package Number | Package Description |
|--------------|----------------|---|
| DM74S373WM | M20B | 20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300 Wide |
| DM74S373N | N20A | 20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide |
| DM74S374WM | M20B | 20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300 Wide |
| DM74S374N | N20A | 20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

Connection Diagrams

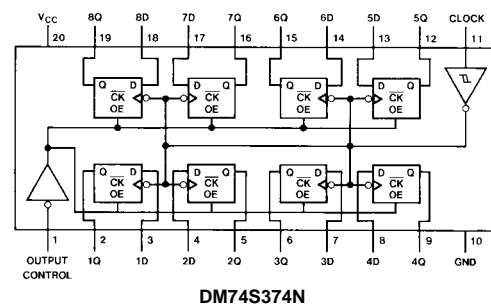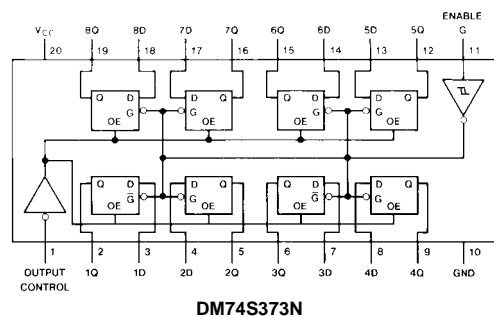

Truth Tables

DM74S373

| Output Control | Enable G | D | Output |
|----------------|----------|---|----------------|
| L | H | H | H |
| L | H | L | L |
| L | L | X | Q ₀ |
| H | X | X | Z |

DM74S374

| Output Control | Clock | D | Output |
|----------------|-------|---|----------------|
| L | ↑ | H | H |
| L | ↑ | L | L |
| L | L | X | Q ₀ |
| H | X | X | Z |

H = HIGH Level (Steady State)

L = LOW Level (Steady State)



X = Don't Care

Z = High Impedance State

↑ = Transition from LOW-to-HIGH level.

Q₀ = The level of the output before steady-state input conditions were established.

Logic Diagrams

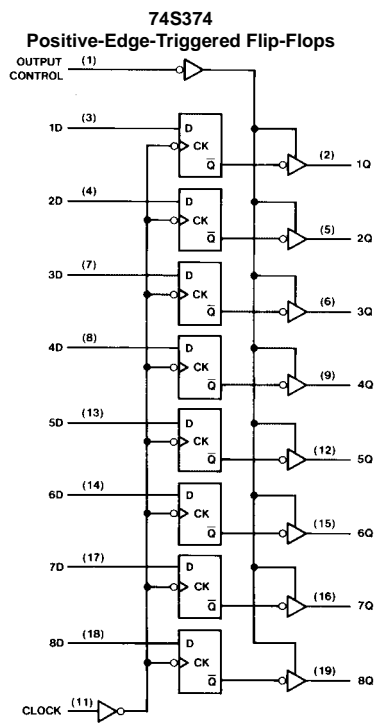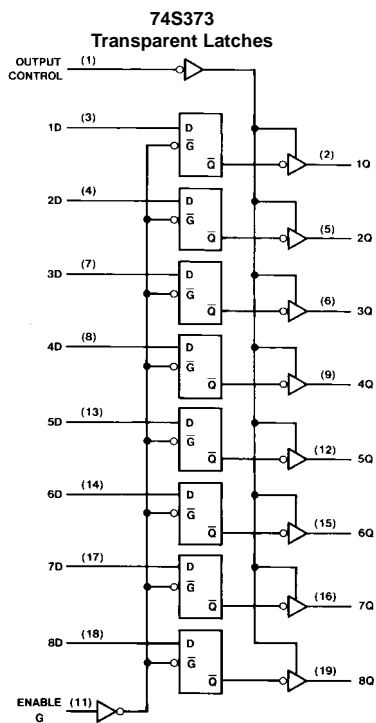

Absolute Maximum Ratings(Note 1)

| | |
|--------------------------------------|-----------------|
| Supply Voltage | 7V |
| Input Voltage | 5.5V |
| Operating Free Air Temperature Range | 0°C to +70°C |
| Storage Temperature Range | -65°C to +150°C |

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

DM74S373 Recommended Operating Conditions

| Symbol | Parameter | Min | Nom | Max | Units |
|----------|----------------------------------|-------------|-----|------|-------|
| V_{CC} | Supply Voltage | 4.75 | 5 | 5.25 | V |
| V_{IH} | HIGH Level Input Voltage | 2 | | | V |
| V_{IL} | LOW Level Input Voltage | | | 0.8 | V |
| I_{OH} | HIGH Level Output Current | | | -6.5 | mA |
| I_{OL} | LOW Level Output Current | | | 20 | mA |
| t_W | Pulse Width (Note 2) | Enable HIGH | 6 | | ns |
| | | Enable LOW | 7.3 | | |
| t_W | Pulse Width (Note 3) | Enable HIGH | 15 | | ns |
| | | Enable LOW | 15 | | |
| t_{SU} | Data Setup Time (Note 4)(Note 5) | 0↓ | | | ns |
| t_H | Data Hold Time (Note 4)(Note 5) | 10↓ | | | ns |
| T_A | Free Air Operating Temperature | 0 | | 70 | °C |

Note 2: $C_L = 15$ pF, $R_L = 280\Omega$, $T_A = 25^\circ\text{C}$ and $V_{CC} = 5\text{V}$.

Note 3: $C_L = 50$ pF and $R_L = 280\Omega$, $T_A = 25^\circ\text{C}$ and $V_{CC} = 5\text{V}$.

Note 4: The symbol (↓) indicates the falling edge of the clock pulse is used for reference.

Note 5: $T_A = 25^\circ\text{C}$ and $V_{CC} = 5\text{V}$.

DM74S373 Electrical Characteristics

over recommended operating free air temperature (unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ (Note 6) | Max | Units |
|-----------|---|--|-----|--------------|------|---------------|
| V_I | Input Clamp Voltage | $V_{CC} = \text{Min}$, $I_I = -18$ mA | | | -1.2 | V |
| V_{OH} | HIGH Level Output Voltage | $V_{CC} = \text{Min}$, $I_{OH} = \text{Max}$ $V_{IL} = \text{Max}$, $V_{IH} = \text{Min}$ | 2.4 | 3.2 | | V |
| V_{OL} | LOW Level Output Voltage | $V_{CC} = \text{Min}$, $I_{OL} = \text{Max}$ $V_{IH} = \text{Min}$, $V_{IL} = \text{Max}$ | | | 0.5 | V |
| I_I | Input Current @ Max Input Voltage | $V_{CC} = \text{Max}$, $V_I = 5.5\text{V}$ | | | 1 | mA |
| I_{IH} | HIGH Level Input Current | $V_{CC} = \text{Max}$, $V_I = 2.7\text{V}$ | | | 50 | μA |
| I_{IL} | LOW Level Input Current | $V_{CC} = \text{Max}$, $V_I = 0.5\text{V}$ | | | -250 | μA |
| I_{OZH} | Off-State Output Current with HIGH Level Output Voltage Applied | $V_{CC} = \text{Max}$, $V_O = 2.4\text{V}$ $V_{IH} = \text{Min}$, $V_{IL} = \text{Max}$ | | | 50 | μA |
| I_{OZL} | Off-State Output Current with LOW Level Output Voltage Applied | $V_{CC} = \text{Max}$, $V_O = 0.5\text{V}$ $V_{IH} = \text{Min}$, $V_{IL} = \text{Max}$ | | | -50 | μA |
| I_{OS} | Short Circuit Output Current | $V_{CC} = \text{Max}$ (Note 7) | -40 | | -100 | mA |
| I_{CC} | Supply Current | $V_{CC} = \text{Max}$ | | 105 | 160 | mA |
| | | Outputs HIGH or LOW | | | 190 | |
| | | Outputs Disabled | | | | |

Note 6: All typicals are at $V_{CC} = 5\text{V}$, $T_A = 25^\circ\text{C}$.

Note 7: Not more than one output should be shorted at a time, and the duration should not exceed one second.

DM74S373 Switching Characteristics

at $V_{CC} = 5V$ and $T_A = 25^\circ C$

| Symbol | Parameter | From (Input) To (Output) | $R_L = 280\Omega$ | | | | Units |
|-----------|--|-----------------------------|----------------------|-----|----------------------|-----|-------|
| | | | $C_L = 15\text{ pF}$ | | $C_L = 50\text{ pF}$ | | |
| | | | Min | Max | Min | Max | |
| t_{PLH} | Propagation Delay Time LOW-to-HIGH Level Output | Data to Any Q | | 12 | | 14 | ns |
| t_{PHL} | Propagation Delay Time HIGH-to-LOW Level Output | Data to Any Q | | 12 | | 16 | ns |
| t_{PLH} | Propagation Delay Time LOW-to-HIGH Level Output | Enable to Any Q | | 14 | | 14 | ns |
| t_{PHL} | Propagation Delay Time HIGH-to-LOW Level Output | Enable to Any Q | | 18 | | 21 | ns |
| t_{PZH} | Enable Time to HIGH Level Output | Output Control to Any Q | | 15 | | 17 | ns |
| t_{PZL} | Output Enable Time to LOW Level Output | Output Control to Any Q | | 18 | | 23 | ns |
| t_{PHZ} | Output Disable Time to HIGH Level Output (Note 8) | Output Control to Any Q | | 9 | | | ns |
| t_{PLZ} | Output Disable Time to LOW Level Output (Note 8) | Output Control to Any Q | | 12 | | | ns |

Note 8: $C_L = 5\text{ pF}$

DM74S374 Recommended Operating Conditions

| Symbol | Parameter | Min | Nom | Max | Units |
|-----------|------------------------------------|-------------|-----|------|------------|
| V_{CC} | Supply Voltage | 4.75 | 5 | 5.25 | V |
| V_{IH} | HIGH Level Input Voltage | | | | V |
| V_{IL} | LOW Level Input Voltage | | | 0.8 | V |
| I_{OH} | HIGH Level Output Current | | | -6.5 | mA |
| I_{OL} | LOW Level Output Current | | | 20 | mA |
| f_{CLK} | Clock Frequency (Note 9) | 0 | | 75 | MHz |
| f_{CLK} | Clock Frequency (Note 10) | 0 | | 75 | MHz |
| t_W | Pulse Width (Note 9) | Clock HIGH | 6 | | ns |
| | | Clock LOW | 7.3 | | |
| | Pulse Width (Note 10) | Clock HIGH | 15 | | |
| | | Clock LOW | 15 | | |
| t_{SU} | Data Setup Time (Note 11)(Note 12) | $5\uparrow$ | | | ns |
| t_H | Data Hold Time (Note 11)(Note 12) | $2\uparrow$ | | | ns |
| T_A | Free Air Operating Temperature | 0 | | 70 | $^\circ C$ |

Note 9: $C_L = 15\text{ pF}$, $R_L = 280\Omega$, $T_A = 25^\circ C$ and $V_{CC} = 5V$.

Note 10: $C_L = 50\text{ pF}$, $R_L = 280\Omega$, $T_A = 25^\circ C$ and $V_{CC} = 5V$.

Note 11: The symbol (\uparrow) indicates the rising edge of the clock pulse is used for reference.

Note 12: $T_A = 25^\circ C$ and $V_{CC} = 5V$.

DM74S374 Electrical Characteristics

over recommended operating free air temperature (unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ (Note 13) | Max | Units | |
|-----------|---|--|------------------|------------------|------|---------------|-----|
| V_I | Input Clamp Voltage | $V_{CC} = \text{Min}, I_I = -18 \text{ mA}$ | | | -1.2 | V | |
| V_{OH} | HIGH Level Output Voltage | $V_{CC} = \text{Min}, I_{OH} = \text{Max}$ $V_{IL} = \text{Max}, V_{IH} = \text{Min}$ | 2.4 | 3.2 | | V | |
| V_{OL} | LOW Level Output Voltage | $V_{CC} = \text{Min}, I_{OL} = \text{Max}$ $V_{IH} = \text{Min}, V_{IL} = \text{Max}$ | | | 0.5 | V | |
| I_I | Input Current @ Max Input Voltage | $V_{CC} = \text{Max}, V_I = 5.5 \text{ V}$ | | | 1 | mA | |
| I_H | HIGH Level Input Current | $V_{CC} = \text{Max}, V_I = 2.7 \text{ V}$ | | | 50 | μA | |
| I_{IL} | LOW Level Input Current | $V_{CC} = \text{Max}, V_I = 0.5 \text{ V}$ | | | -250 | μA | |
| I_{OZH} | Off-State Output Current with HIGH Level Output Voltage Applied | $V_{CC} = \text{Max}, V_O = 2.4 \text{ V}$ $V_{IH} = \text{Min}, V_{IL} = \text{Max}$ | | | 50 | μA | |
| I_{OZL} | Off-State Output Current with LOW Level Output Voltage Applied | $V_{CC} = \text{Max}, V_O = 0.5 \text{ V}$ $V_{IH} = \text{Min}, V_{IL} = \text{Max}$ | | | -50 | μA | |
| I_{OS} | Short Circuit Output Current | $V_{CC} = \text{Max}$ (Note 14) | -40 | | -100 | mA | |
| I_{CC} | Supply Current | $V_{CC} = \text{Max}$ | Outputs HIGH | | 110 | mA | |
| | | | Outputs LOW | | 90 | | 140 |
| | | | Outputs Disabled | | | | 160 |

Note 13: All typicals are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

Note 14: Not more than one output should be shorted at a time, and the duration should not exceed one second.


DM74S374 Switching Characteristics

at $V_{CC} = 5 \text{ V}$ and $T_A = 25^\circ\text{C}$


| Symbol | Parameter | From (Input) To (Output) | $R_L = 280\Omega$ | | | | Units |
|-----------|---|-----------------------------|-----------------------|-----|-----------------------|-----|-------|
| | | | $C_L = 15 \text{ pF}$ | | $C_L = 50 \text{ pF}$ | | |
| | | | Min | Max | Min | Max | |
| f_{MAX} | Maximum Clock Frequency | | | 75 | | 75 | MHz |
| t_{PLH} | Propagation Delay Time LOW-to-HIGH Level Output | Clock to Any Q | | 15 | | 15 | ns |
| t_{PHL} | Propagation Delay Time HIGH-to-LOW Level Output | Clock to Any Q | | 17 | | 20 | ns |
| t_{PZH} | Output Enable Time to HIGH Level Output | Output Control to Any Q | | 15 | | 17 | ns |
| t_{PZL} | Output Enable Time to LOW Level Output | Output Control to Any Q | | 18 | | 23 | ns |
| t_{PHZ} | Output Disable Time from HIGH Level Output (Note 15) | Output Control to Any Q | | 9 | | | ns |
| t_{PLZ} | Output Disable Time from LOW Level Output (Note 15) | Output Control to Any Q | | 12 | | | ns |

Note 15: $C_L = 5 \text{ pF}$

Physical Dimensions inches (millimeters) unless otherwise noted

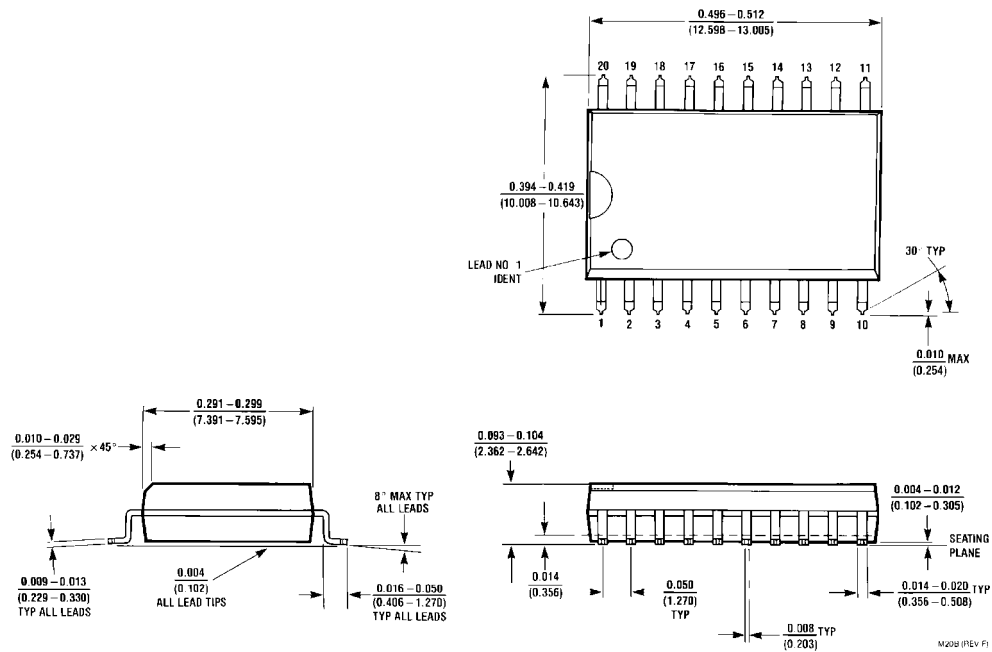

**20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300 Wide
Package Number M20B**

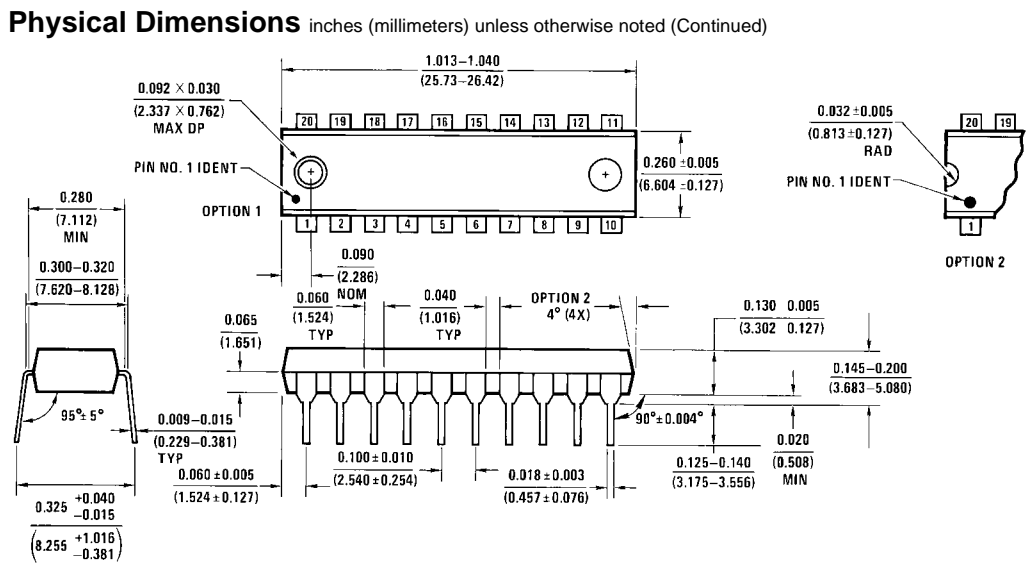

20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide
Package Number N20A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com