



1. Mechanical Dimensions:

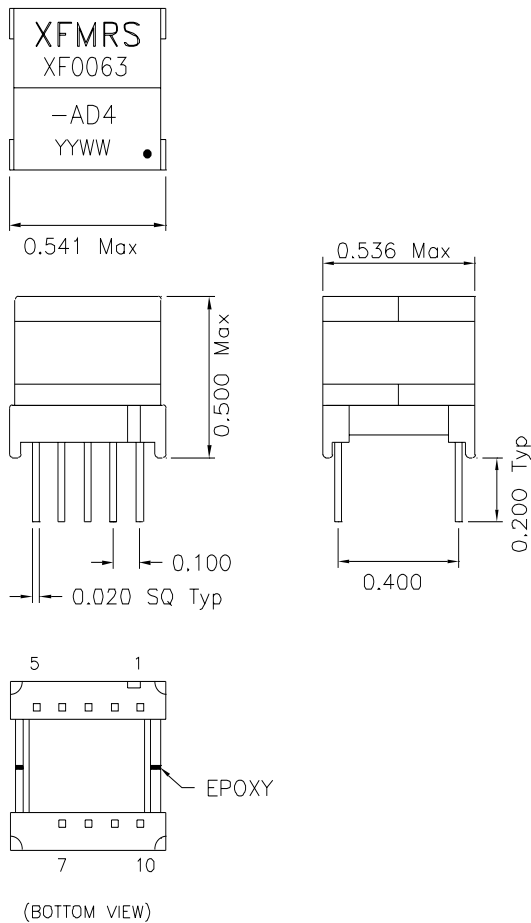

Note: Designed to meet UL1950 for supplementary insulation, 250 working volts.

DOC. REV: A/1

2. Schematic:



3. Electrical Specifications:

Turns Ratio: 1-4:2-5 1:1

Isolation Voltage: 850VAC

OCL: P1-4 5.5mH±10% 10KHz 0.1V 0/160mAdc

DC Res.: 1-4 4.75 Ohms±15%

2-5 4.75 Ohms ±15%

Resonant Frequency: 220KHz Min

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

XFMR5 Inc	Title: ADSL Inductor		
UNLESS OTHERWISE SPECIFIED	P/N: XF0063-AD4	REV. A	
TOLERANCES: .xxx ±0.010	DWN. 李清儿	Aug-10-99	
Dimensions in INCH	CHK. 孙悦	Aug-10-99	
Scale 1.5:1 SHT 1 OF 1	APP. Joe Huff	Aug-10-99	