



1. Dimensions:

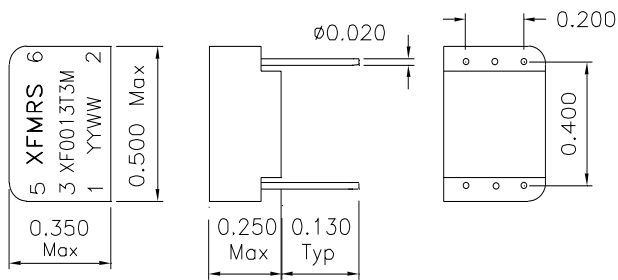

PIN 4 IS REMOVED

2. Schematic:

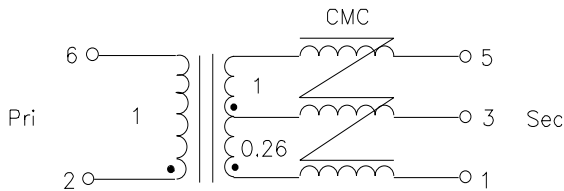

3. Electrical Specifications: @25°C

Primary Pins: Pins 2-6
 Isolation Voltage: 1500Vrms
 Turns Ratio: (2-6):(1-3):(3-5)=1:0.26:1±5%
 PRI OCL: 1.5mH Minimum @100KHz 50mV
 PRI LL: 0.40uH Maximum @100KHz 50mV (SEC Shorted)
 Cw/w: 40pF Maximum @100KHz 50mV (PRI/SEC)
 PRI DCR: 0.70 ohms Maximum (Pins 2-6)
 SEC DCR: 1.10 ohms Maximum (Pins 1-5)
 CMC OCL: 18uH Minimum @ 100KHz 50mV

DOC. REV A/1

XFMRS Inc	Title: T1/CEPT/ISDN-PRI TRANSFORMERS	
	P/N: XF0013T3M	REV. A
UNLESS OTHERWISE SPECIFIED	DWN. 李清儿	Jun-16-97
TOLERANCES: .xxx ±0.010	CHK. 孙悦	Jun-16-97
Dimensions in Inch	APP. Joe Huff	Jun-16-97
SCALE 2:1 SHT 1 OF 1		

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION