



Phase Control Thyristor

CS 1250

$I_{TRMS} = 3000 \text{ A}$
 $I_{TAVM} = 1250 \text{ A}$
 $V_{RRM} = 1200 - 1600$

V

| V_{RSM} | V_{RRM} | Type |
|-----------|-----------|-----------------|
| V_{DSM} | V_{DRM} | |
| V | V | |
| 1200 | 1200 | CS 1250 - 12io1 |
| 1400 | 1400 | CS 1250 - 14io1 |
| 1600 | 1600 | CS 1250 - 16io1 |

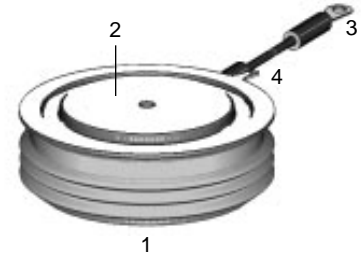

| Symbol | Test Conditions | Maximum Ratings |
|----------------|---|---|
| I_{TRMS} | | 3000 A |
| I_{TAVM} | $T_C = 83^\circ\text{C}; 180^\circ \text{ sine}$ | 1250 A |
| I_{TSM} | $T_{VJ} = 45^\circ\text{C}; V_R = 0$ | $t = 10 \text{ ms (50 Hz), sine}$ 23000 A $t = 8.3 \text{ ms (60 Hz), sine}$ 25000 A |
| | $T_{VJ} = T_{VJM}; V_R = 0$ | $t = 10 \text{ ms (50 Hz), sine}$ 21000 A $t = 8.3 \text{ ms (60 Hz), sine}$ 23000 A |
| $\int i^2 dt$ | $T_{VJ} = 45^\circ\text{C}; V_R = 0$ | $t = 10 \text{ ms (50 Hz), sine}$ 2645000 A ² s $t = 8.3 \text{ ms (60 Hz), sine}$ 2594000 A ² s |
| | $T_{VJ} = T_{VJM}; V_R = 0$ | $t = 10 \text{ ms (50 Hz), sine}$ 2205000 A ² s $t = 8.3 \text{ ms (60 Hz), sine}$ 2195000 A ² s |
| $(di/dt)_{cr}$ | $T_{VJ} = T_{VJM}; f = 5 \text{ Hz}, t_p = 200 \text{ ms}; V_D = 1/2 V_{DRM}; I_G = 2 \text{ A}; di_G/dt = 2 \text{ A}/\mu\text{s}$ | repetitive, $I_T = 2500 \text{ A}$ 320 A/ μs |
| $(dv/dt)_{cr}$ | $T_{VJ} = T_{VJM}; R_{GK} = \infty; \text{method 1 (linear voltage rise)}$ | $V_{DR} = 2/3 V_{DRM}$ 1000 V/ μs |
| P_{GM} | $T_{VJ} = T_{VJM}; I_T = I_{TAVM}$ | $t_p = 30 \mu\text{s}$ 120 W $t_p = 500 \mu\text{s}$ 60 W $t_p = 10 \text{ ms}$ 16 W |
| | | 5 V |
| | | |
| T_{VJ} | | -40...+125 °C |
| T_{VJM} | | 125 °C |
| T_{stg} | | -40...+ 50 °C |
| M_d | Mounting force | 24.0 .. 28.0 kN |
| Weight | | 600 g |

Features

- Thyristor for line frequency
- International standard package
- Long-term stability of blocking voltages
- Gate and auxiliary cathode pin connection
- Amplifying gate

Typical Applications

- DC Motor control
- Power converter
- AC power controller


Data according to DIN/IEC 747-6
IXYS reserves the right to change limits, test conditions and dimensions

©1996 IXYS Corporation. All rights reserved.

IXYS Corporation
3540 Bassett Street, Santa Clara CA 95054
Phone: (408) 982-0700 Fax: 408-496-0670

IXYS Semiconductor GmbH
Edisonstr. 15, D-68623 Lampertheim, Germany
Phone: +49-6206-5030 Fax: +49-6206-503627

| Symbol | Test Conditions | Characteristic Values | |
|--------------|--|-----------------------|----------|
| $I_{R'} I_D$ | $T_{VJ} = T_{VJM}; V_R = V_{RRM}; V_D = V_{DRM}$ | \leq | 60 mA |
| V_T | $I_T = 3.14 \times I_{TAVM}; T_{VJ} = 25^\circ\text{C}$ | \leq | 1.85 V |
| V_{T0} | For power-loss calculations only ($T_{VJ} = 125^\circ\text{C}$) | | 1.0 V |
| r_T | | | 0.21 mΩ |
| V_{GT} | $V_D = 12 \text{ V}; T_{VJ} = 25^\circ\text{C}$ | \leq | 3.0 V |
| I_{GT} | $V_D = 12 \text{ V}; T_{VJ} = 25^\circ\text{C}$ | \leq | 300 mA |
| V_{GD} | $T_{VJ} = T_{VJM}; V_D = 2/3 V_{DRM}$ | \leq | 0.25 V |
| I_L | $T_{VJ} = 25^\circ\text{C}; t_p = 10 \mu\text{s}$ $I_G = 2 \text{ A}; di_G/dt = 2 \text{ A}/\mu\text{s}$ | \leq | 1.0 A |
| I_H | $T_{VJ} = 25^\circ\text{C}; V_D = 12 \text{ V}; R_{GK} = \infty$ | \leq | 0.3 A |
| t_{gd} | $T_{VJ} = 25^\circ\text{C}; V_D = 500 \text{ V}$ $I_G = 2 \text{ A}; di_G/dt = 2 \text{ A}/\mu\text{s}$ | \leq | 2.5 μs |
| t_q | $T_{VJ} = T_{VJM}; I_T = 1250 \text{ A}, t_p = 200 \mu\text{s}; di/dt = -10 \text{ A}/\mu\text{styp.}$ $V_R = 100 \text{ V}; dv/dt = 50 \text{ V}/\mu\text{s}; V_D = 2/3 V_{DRM}$ | | 150 μs |
| R_{thJC} | DC current | | 0.02 K/W |

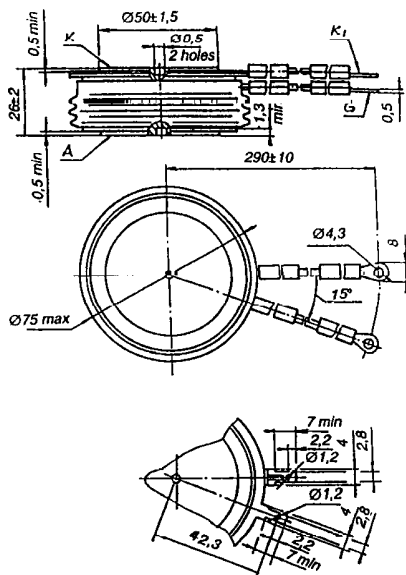Dimensions in mm (1 mm = 0.0394")


IXYS reserves the right to change limits, test conditions, and dimensions.