



Micro Commercial Components

## Micro Commercial Components Corp.

### Products End of Life Notification

Issue date: Feb-11th-2010

EOL No. #:020910

Last Buy Date :N/A

Description and Purpose:

MCC has undergone a review of its core business and products , and determined to discontinue below products:

| Discontinued Devices | Possible Replacements |
|----------------------|-----------------------|
| BZM55C2V0~BZM55C2V2  | N/A                   |
| BZM55C2V4~BZM55C39   | BZT52C2V4S~BZT52C39S  |
| BZM55C43~BZM55C75    | N/A                   |
| BZT55C2V0~BZT55C2V2  | N/A                   |
| BZT55C2V4~BZT55C43   | BZT52C2V4~BZT52C43    |
| BZT55C47~BZT55C75    | N/A                   |
| ERD3.3F~ERD75F       | N/A                   |
| H2-A3~H36-3          | N/A                   |
| LLUDZS3.6B~LLUDZS36B | N/A                   |
| LS5221~LS5267        | DL5221~DL5267         |
| LSH2-A3~LSH36-3      | N/A                   |
| MCL5221~MCL5259      | MMXZ5221~MMXZ5259     |
| MCL5260~MCL5267      | N/A                   |
| MTZJ2.0~MTZJ39       | MMTZJ2.0~MMTZJ39      |
| ZY5.1~ZY39           | 2EZ5.1D5~2EZ39D5      |
| ZY43~ZY51            | N/A                   |

[www.mccsemi.com](http://www.mccsemi.com)



**Micro Commercial Components**

Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

**H2 Series  
 THRU  
 H36 Series**

**500 mW  
 Zener Diode  
 1.9 to 37.2 Volts**

**Features**

- Moisture Sensitivity: Level 1 per J-STD-020C
- Low Leakage
- Low Zener Impedance
- High Reliability
- Marking : Cathode band and type number
- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)

**Maximum Ratings**

| Symbol    | Rating                    | Rating      | Unit        |
|-----------|---------------------------|-------------|-------------|
| $P_D$     | Power dissipation         | 500         | W           |
| $T_J$     | Junction Temperature      | -55 to +175 | $^{\circ}C$ |
| $T_{STG}$ | Storage Temperature Range | -55 to +175 | $^{\circ}C$ |

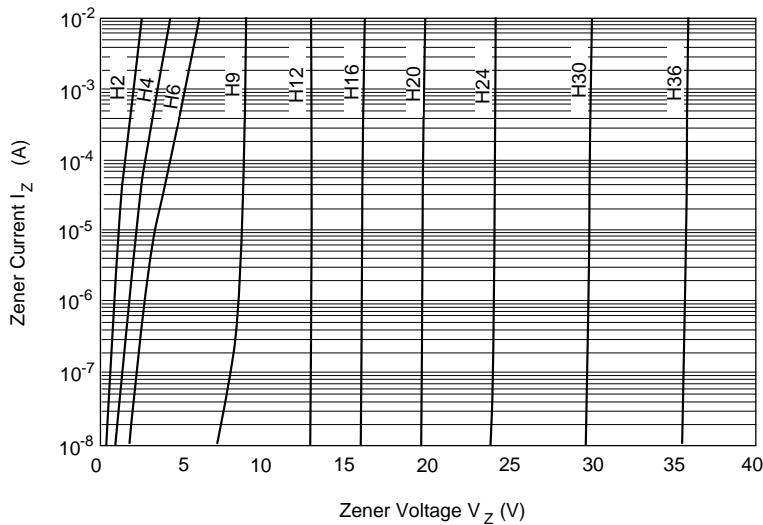


Fig.1 Zener current Vs. Zener voltage

**DO-35**

| DIMENSIONS |        |      |       |      |      |
|------------|--------|------|-------|------|------|
| DIM        | INCHES |      | MM    |      | NOTE |
|            | MIN    | MAX  | MIN   | MAX  |      |
| A          | ---    | .166 | ---   | 4.2  |      |
| B          | ---    | .079 | ---   | 2.00 |      |
| C          | ---    | .020 | ---   | .52  |      |
| D          | 1.000  | ---  | 25.40 | ---  |      |

Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 5.

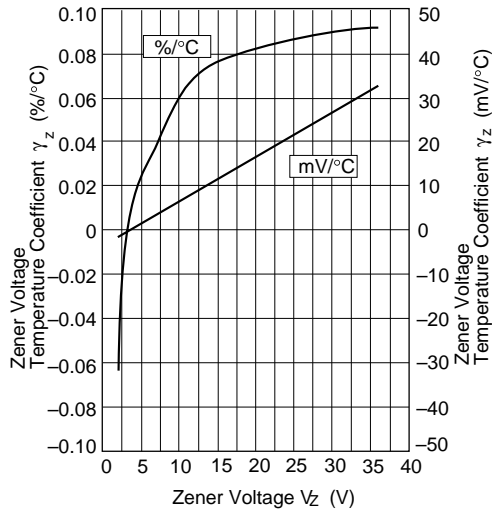


Fig.2 Temperature Coefficient Vs. Zener voltage

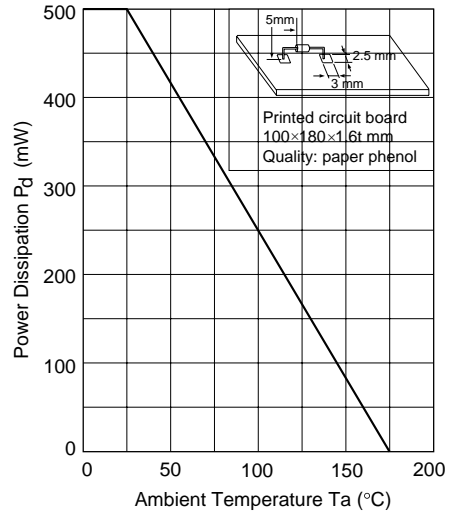


Fig.3 Power Dissipation Vs. Ambient Temperature

ELECTRICAL CHARACTERISTICS @25°C

| MCC PART NUMBER |       | ZENER VOLTAGE $V_Z @ I_{ZT}$ VOLTS |     | TEST CURRENT $I_{ZT}$ | Dynamic Resistance $r_d (Max) @ I_Z$ |     | REVERSE CURRENT $I_R (Max) @ V_R$ |       |
|-----------------|-------|------------------------------------|-----|-----------------------|--------------------------------------|-----|-----------------------------------|-------|
| Type            | Grade | Min                                | Max | mA                    | OHMS                                 | mA  | $\mu A$                           | VOLTS |
| H2              | A3    | 1.8                                | 2.0 | 5.0                   | 100                                  | 5.0 | 25                                | 0.5   |
|                 | B1    | 1.9                                | 2.1 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | B2    | 2.0                                | 2.2 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | B3    | 2.1                                | 2.3 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | C1    | 2.2                                | 2.4 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | C2    | 2.3                                | 2.5 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
| H3              | C3    | 2.4                                | 2.6 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | A1    | 2.5                                | 2.7 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | A2    | 2.6                                | 2.8 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | A3    | 2.7                                | 2.9 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | B1    | 2.8                                | 3.0 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | B2    | 2.9                                | 3.1 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | B3    | 3.0                                | 3.2 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | C1    | 3.1                                | 3.3 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | C2    | 3.2                                | 3.4 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
| H4              | C3    | 3.3                                | 3.5 | 5.0                   | 100                                  | 5.0 | 5.0                               | 0.5   |
|                 | A1    | 3.4                                | 3.6 | 5.0                   | 100                                  | 5.0 | 5.0                               | 1.0   |
|                 | A2    | 3.5                                | 3.7 | 5.0                   | 100                                  | 5.0 | 5.0                               | 1.0   |
|                 | A3    | 3.6                                | 3.8 | 5.0                   | 100                                  | 5.0 | 5.0                               | 1.0   |
|                 | B1    | 3.7                                | 3.9 | 5.0                   | 100                                  | 5.0 | 5.0                               | 1.0   |
|                 | B2    | 3.8                                | 4.0 | 5.0                   | 100                                  | 5.0 | 5.0                               | 1.0   |
|                 | B3    | 3.9                                | 4.1 | 5.0                   | 100                                  | 5.0 | 5.0                               | 1.0   |
|                 | C1    | 4.0                                | 4.2 | 5.0                   | 100                                  | 5.0 | 5.0                               | 1.0   |
|                 | C2    | 4.1                                | 4.3 | 5.0                   | 100                                  | 5.0 | 5.0                               | 1.0   |
|                 | C3    | 4.2                                | 4.4 | 5.0                   | 100                                  | 5.0 | 5.0                               | 1.0   |

## H2 Series thru H36 Series



Micro Commercial Components

### ELECTRICAL CHARACTERISTICS @25°C

| MCC PART NUMBER |       | ZENER VOLTAGE<br>$V_Z @ I_{ZT}$<br>VOLTS |      | TEST CURRENT<br>$I_{ZT}$ | Dynamic Resistance<br>$r_d$ (Max) $I_Z$ |     | REVERSE CURRENT<br>$I_R$ (Max) @ $V_R$ |       |
|-----------------|-------|--|------|--------------------------|---|-----|--|-------|
| Type            | Grade | Min                                      | Max  | mA                       | OHMS                                    | mA  | $\mu A$                                | VOLTS |
| H5              | A1    | 4.3                                      | 4.5  | 5.0                      | 100                                     | 5.0 | 5.0                                    | 1.5   |
|                 | A2    | 4.4                                      | 4.6  | 5.0                      | 100                                     | 5.0 | 5.0                                    | 1.5   |
|                 | A3    | 4.5                                      | 4.7  | 5.0                      | 100                                     | 5.0 | 5.0                                    | 1.5   |
|                 | B1    | 4.6                                      | 4.8  | 5.0                      | 100                                     | 5.0 | 5.0                                    | 1.5   |
|                 | B2    | 4.7                                      | 4.9  | 5.0                      | 100                                     | 5.0 | 5.0                                    | 1.5   |
|                 | B3    | 4.8                                      | 5.0  | 5.0                      | 100                                     | 5.0 | 5.0                                    | 1.5   |
|                 | C1    | 4.9                                      | 5.1  | 5.0                      | 100                                     | 5.0 | 5.0                                    | 1.5   |
|                 | C2    | 5.0                                      | 5.2  | 5.0                      | 100                                     | 5.0 | 5.0                                    | 1.5   |
|                 | C3    | 5.1                                      | 5.3  | 5.0                      | 100                                     | 5.0 | 5.0                                    | 1.5   |
| H6              | A1    | 5.2                                      | 5.5  | 5.0                      | 40                                      | 5.0 | 5.0                                    | 2.0   |
|                 | A2    | 5.3                                      | 5.6  | 5.0                      | 40                                      | 5.0 | 5.0                                    | 2.0   |
|                 | A3    | 5.4                                      | 5.7  | 5.0                      | 40                                      | 5.0 | 5.0                                    | 2.0   |
|                 | B1    | 5.5                                      | 5.8  | 5.0                      | 40                                      | 5.0 | 5.0                                    | 2.0   |
|                 | B2    | 5.6                                      | 5.9  | 5.0                      | 40                                      | 5.0 | 5.0                                    | 2.0   |
|                 | B3    | 5.7                                      | 6.0  | 5.0                      | 40                                      | 5.0 | 5.0                                    | 2.0   |
|                 | C1    | 5.8                                      | 6.1  | 5.0                      | 40                                      | 5.0 | 5.0                                    | 2.0   |
|                 | C2    | 6.0                                      | 6.3  | 5.0                      | 40                                      | 5.0 | 5.0                                    | 2.0   |
|                 | C3    | 6.1                                      | 6.4  | 5.0                      | 40                                      | 5.0 | 5.0                                    | 2.0   |
| H7              | A1    | 6.3                                      | 6.6  | 5.0                      | 15                                      | 5.0 | 1.0                                    | 3.5   |
|                 | A2    | 6.4                                      | 6.7  | 5.0                      | 15                                      | 5.0 | 1.0                                    | 3.5   |
|                 | A3    | 6.6                                      | 6.9  | 5.0                      | 15                                      | 5.0 | 1.0                                    | 3.5   |
|                 | B1    | 6.7                                      | 7.0  | 5.0                      | 15                                      | 5.0 | 1.0                                    | 3.5   |
|                 | B2    | 6.9                                      | 7.2  | 5.0                      | 15                                      | 5.0 | 1.0                                    | 3.5   |
|                 | B3    | 7.0                                      | 7.3  | 5.0                      | 15                                      | 5.0 | 1.0                                    | 3.5   |
|                 | C1    | 7.2                                      | 7.6  | 5.0                      | 15                                      | 5.0 | 1.0                                    | 3.5   |
|                 | C2    | 7.3                                      | 7.7  | 5.0                      | 15                                      | 5.0 | 1.0                                    | 3.5   |
|                 | C3    | 7.5                                      | 7.9  | 5.0                      | 15                                      | 5.0 | 1.0                                    | 3.5   |
| H9              | A1    | 7.7                                      | 8.1  | 5.0                      | 20                                      | 5.0 | 1.0                                    | 5.0   |
|                 | A2    | 7.9                                      | 8.3  | 5.0                      | 20                                      | 5.0 | 1.0                                    | 5.0   |
|                 | A3    | 8.1                                      | 8.5  | 5.0                      | 20                                      | 5.0 | 1.0                                    | 5.0   |
|                 | B1    | 8.3                                      | 8.7  | 5.0                      | 20                                      | 5.0 | 1.0                                    | 5.0   |
|                 | B2    | 8.5                                      | 8.9  | 5.0                      | 20                                      | 5.0 | 1.0                                    | 5.0   |
|                 | B3    | 8.7                                      | 9.1  | 5.0                      | 20                                      | 5.0 | 1.0                                    | 5.0   |
|                 | C1    | 8.9                                      | 9.3  | 5.0                      | 20                                      | 5.0 | 1.0                                    | 5.0   |
|                 | C2    | 9.1                                      | 9.5  | 5.0                      | 20                                      | 5.0 | 1.0                                    | 5.0   |
|                 | C3    | 9.3                                      | 9.7  | 5.0                      | 20                                      | 5.0 | 1.0                                    | 5.0   |
| H11             | A1    | 9.5                                      | 9.9  | 5.0                      | 25                                      | 5.0 | 1.0                                    | 7.5   |
|                 | A2    | 9.7                                      | 10.1 | 5.0                      | 25                                      | 5.0 | 1.0                                    | 7.5   |
|                 | A3    | 9.9                                      | 10.3 | 5.0                      | 25                                      | 5.0 | 1.0                                    | 7.5   |
|                 | B1    | 10.2                                     | 10.6 | 5.0                      | 25                                      | 5.0 | 1.0                                    | 7.5   |
|                 | B2    | 10.4                                     | 10.8 | 5.0                      | 25                                      | 5.0 | 1.0                                    | 7.5   |
|                 | B3    | 10.7                                     | 11.1 | 5.0                      | 25                                      | 5.0 | 1.0                                    | 7.5   |
|                 | C1    | 10.9                                     | 11.3 | 5.0                      | 25                                      | 5.0 | 1.0                                    | 7.5   |
|                 | C2    | 11.1                                     | 11.6 | 5.0                      | 25                                      | 5.0 | 1.0                                    | 7.5   |
|                 | C3    | 11.4                                     | 11.9 | 5.0                      | 25                                      | 5.0 | 1.0                                    | 7.5   |
| H12             | A1    | 11.6                                     | 12.1 | 5.0                      | 35                                      | 5.0 | 1.0                                    | 9.5   |
|                 | A2    | 11.9                                     | 12.4 | 5.0                      | 35                                      | 5.0 | 1.0                                    | 9.5   |
|                 | A3    | 12.2                                     | 12.7 | 5.0                      | 35                                      | 5.0 | 1.0                                    | 9.5   |
|                 | B1    | 12.4                                     | 12.9 | 5.0                      | 35                                      | 5.0 | 1.0                                    | 9.5   |
|                 | B2    | 12.6                                     | 13.1 | 5.0                      | 35                                      | 5.0 | 1.0                                    | 9.5   |
|                 | B3    | 12.9                                     | 13.4 | 5.0                      | 35                                      | 5.0 | 1.0                                    | 9.5   |
|                 | C1    | 13.2                                     | 13.7 | 5.0                      | 35                                      | 5.0 | 1.0                                    | 9.5   |
|                 | C2    | 13.5                                     | 14.0 | 5.0                      | 35                                      | 5.0 | 1.0                                    | 9.5   |
|                 | C3    | 13.8                                     | 14.3 | 5.0                      | 35                                      | 5.0 | 1.0                                    | 9.5   |
| H15             | 1     | 14.1                                     | 14.7 | 5.0                      | 40                                      | 5.0 | 1.0                                    | 11    |
|                 | 2     | 14.5                                     | 15.1 | 5.0                      | 40                                      | 5.0 | 1.0                                    | 11    |
|                 | 3     | 14.9                                     | 15.5 | 5.0                      | 40                                      | 5.0 | 1.0                                    | 11    |
| H16             | 1     | 15.3                                     | 15.9 | 5.0                      | 45                                      | 5.0 | 1.0                                    | 12    |
|                 | 2     | 15.7                                     | 16.5 | 5.0                      | 45                                      | 5.0 | 1.0                                    | 12    |
|                 | 3     | 16.3                                     | 17.1 | 5.0                      | 45                                      | 5.0 | 1.0                                    | 12    |
| H18             | 1     | 16.9                                     | 17.7 | 5.0                      | 55                                      | 5.0 | 1.0                                    | 13    |
|                 | 2     | 17.5                                     | 18.3 | 5.0                      | 55                                      | 5.0 | 1.0                                    | 13    |
|                 | 3     | 18.1                                     | 19.0 | 5.0                      | 55                                      | 5.0 | 1.0                                    | 13    |
| H20             | 1     | 18.8                                     | 19.7 | 2.0                      | 60                                      | 2.0 | 1.0                                    | 15    |
|                 | 2     | 19.5                                     | 20.4 | 2.0                      | 60                                      | 2.0 | 1.0                                    | 15    |
|                 | 3     | 20.2                                     | 21.1 | 2.0                      | 60                                      | 2.0 | 1.0                                    | 15    |

H2 Series thru H36 Series

**ELECTRICAL CHARACTERISTICS @25°C**

| MCC PART NUMBER |       | ZENER VOLTAGE<br>$V_z @ I_{zT}$<br>VOLTS |      | TEST CURRENT<br>$I_{zT}$ | Dynamic Resistance<br>$r_d(\text{Max})$ $I_z$ |     | REVERSE CURRENT<br>$I_R(\text{Max})$ @ $V_R$ |       |
|-----------------|-------|--|------|--------------------------|---|-----|--|-------|
| Type            | Grade | Min                                      | Max  | mA                       | OHMS  | mA  | $\mu\text{A}$                                | VOLTS |
| H22             | 1     | 20.9                                     | 21.9 | 2.0                      | 65  | 2.0 | 1.0  | 17    |
|                 | 2     | 21.6                                     | 22.6 | 2.0                      | 65  | 2.0 | 1.0  | 17    |
|                 | 3     | 22.3                                     | 23.3 | 2.0                      | 65  | 2.0 | 1.0  | 17    |
| H24             | 1     | 22.9                                     | 24.0 | 2.0                      | 70  | 2.0 | 1.0  | 19    |
|                 | 2     | 23.6                                     | 24.7 | 2.0                      | 70  | 2.0 | 1.0  | 19    |
|                 | 3     | 24.3                                     | 25.5 | 2.0                      | 70  | 2.0 | 1.0  | 19    |
| H27             | 1     | 25.2                                     | 26.6 | 2.0                      | 80  | 2.0 | 1.0  | 21.0  |
|                 | 2     | 26.2                                     | 27.6 | 2.0                      | 80  | 2.0 | 1.0  | 21.0  |
|                 | 3     | 27.2                                     | 28.6 | 2.0                      | 80  | 2.0 | 1.0  | 21.0  |
| H30             | 1     | 28.2                                     | 29.6 | 2.0                      | 100   | 2.0 | 1.0  | 23.0  |
|                 | 2     | 29.2                                     | 30.6 | 2.0                      | 100   | 2.0 | 1.0  | 23.0  |
|                 | 3     | 30.2                                     | 31.6 | 2.0                      | 100   | 2.0 | 1.0  | 23.0  |
| H33             | 1     | 31.2                                     | 32.6 | 2.0                      | 120   | 2.0 | 1.0  | 25.0  |
|                 | 2     | 32.2                                     | 33.6 | 2.0                      | 120   | 2.0 | 1.0  | 25.0  |
|                 | 3     | 33.2                                     | 34.6 | 2.0                      | 120   | 2.0 | 1.0  | 25.0  |
| H36             | 1     | 34.2                                     | 35.7 | 2.0                      | 140   | 2.0 | 1.0  | 27.0  |
|                 | 2     | 35.3                                     | 36.8 | 2.0                      | 140   | 2.0 | 1.0  | 27.0  |
|                 | 3     | 36.4                                     | 38.0 | 2.0                      | 140   | 2.0 | 1.0  | 27.0  |



Micro Commercial Components

## Ordering Information

| Device           | Packing                    |
|------------------|----------------------------|
| (Part Number)-TP | Tape&Reel; 10Kpcs/Reel     |
| (Part Number)-AP | Ammo Packing;5Kpcs/AmmoBox |
| (Part Number)-BP | Bulk;500pcs/Bag            |

### \*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .  
*Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.