

Surface Mount Multilayer Ceramic Chip Capacitors High Frequency DSCC Qualified Type 05001



FEATURES

- US Defense Supply Center approved
- Federal stock control number, CAGE CODE 95275
- Case size 0805
- High frequency
- Excellent aging characteristics
- Lead (Pb)-free "M" terminations code
- Tin/lead ("Z" termination code) available
- Surface-mountable, precious metal technology, wet build process
- Made with a combination of design, materials and tight process control to achieve very high field reliability
- Halogen-free according to IEC 61249-2-21



Available

RoHS*
COMPLIANT
HALOGEN
FREE
Available

ELECTRICAL SPECIFICATIONS

Note: Electrical characteristics at 25 °C unless otherwise specified

Operating Temperature:

- 55 °C to + 125 °C

Capacitance Range:

1.0 pF to 100 pF

Voltage Rating:

50 Vdc to 250 Vdc

Temperature Coefficient of Capacitance (TCC):

BP: 0 ± 30 ppm/°C from - 55 °C to + 125 °C

with zero (0) Vdc applied

Dissipation Factor (DF):

BP: 0.05 % max. at 1.0 V_{rms} and 1 MHz

Aging Rate:

0 % maximum per decade

Insulation Resistance (IR):

At + 25 °C and rated voltage 100 000 MΩ minimum or 1000 ΩF, whichever is less

At + 125 °C and rated voltage 10 000 MΩ minimum or 100 ΩF, whichever is less


Dielectric Withstanding Voltage (DWV):

This is the maximum voltage the capacitors are tested for a 1 to 5 s period and the charge/discharge current does not exceed 50 mA

≤ 250 Vdc: DWV at 250 % of rated voltage

* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS IN INCHES (millimeters)

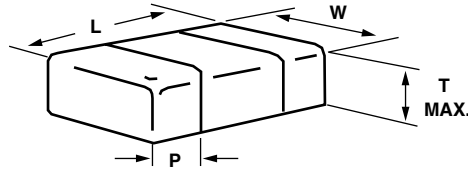

PART ORDERING NUMBER	LENGTH (L)	WIDTH (W)	MAXIMUM THICKNESS (T)	TERMINATIONS PAD (P)	
				MINIMUM	MAXIMUM
05001-	0.079 ± 0.008 [2.00 ± 0.20]	0.049 ± 0.008 [1.25 ± 0.20]	0.055 [1.39]	0.010 [0.25]	0.028 [0.71]

PART NUMBERING AND ORDERING

05001-	1R0	B	F	Z	-	C
DSCC NUMBER	CAPACITANCE NOMINAL CODE	DC VOLTAGE RATING ⁽¹⁾	CAPACITANCE TOLERANCE	TERMINATION	GROUP C TESTING OPTION	PACKAGING
0805 Case size High Frequency	Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. An "R" indicates a decimal point. Examples: 1R0 = 1.0 pF	A = 50 V B = 100 V C = 200 V K = 250 V	B = ± 0.1 pF C = ± 0.25 pF D = ± 0.5 pF F = ± 1 % G = ± 2 % J = ± 5 % K = ± 10 % M = ± 20 % Note: B, C, D ≤ 6.2 pF B, C, J, K, M 6.8 pF to 9.1 pF F, G, J, K, M ≥ 10 pF	M = Palladium/Silver Z = Ni barrier with tin/lead plate min. 4 % lead	C = Full Group C L = 2000 h life test only M = 1000 h life test only H = Low voltage humidity test only - = Group A test only	T = 7" reel/plastic tape C = 7" reel/paper tape J = 7" reel (low quantity) R = 11 1/4"/13" reel/plastic tape P = 11 1/4"/13" reel/paper tape B = Bulk

Notes:

- ⁽¹⁾ DC voltage rating should not be exceeded in application
- ⁽²⁾ Selecting one of the group C options with life testing extend the delivery time



DSCC 05001 MLCCS CAPACITANCE RANGE					
STYLE		05001			
EIA TYPE		0805			
VOLTAGE (Vdc)		50	100	200	250
CAP. CODE	CAP.				
1R0	1.0 pF	**	**	**	**
1R1	1.1 pF	**	**	**	**
1R2	1.2 pF	**	**	**	**
1R3	1.3 pF	**	**	**	**
1R4	1.4 pF	**	**	**	**
1R5	1.5 pF	**	**	**	**
1R6	1.6 pF	**	**	**	**
1R7	1.7 pF	**	**	**	**
1R8	1.8 pF	**	**	**	**
1R9	1.9 pF	**	**	**	**
2R0	2.0 pF	**	**	**	**
2R1	2.1 pF	**	**	**	**
2R2	2.2 pF	**	**	**	**
2R4	2.4 pF	**	**	**	**
2R7	2.7 pF	**	**	**	**
3R0	3.0 pF	**	**	**	**
3R3	3.3 pF	**	**	**	**
3R6	3.6 pF	**	**	**	**
3R9	3.9 pF	**	**	**	**
4R3	4.3 pF	**	**	**	**
4R7	4.7 pF	**	**	**	**
5R1	5.1 pF	**	**	**	**
5R6	5.6 pF	**	**	**	**
6R2	6.2 pF	**	**	**	**
6R8	6.8 pF	**	**	**	**
7R5	7.5 pF	**	**	**	**
8R2	8.2 pF	**	**	**	**
9R1	9.1 pF	**	**	**	**
100	10 pF	**	**	**	**
110	11 pF	**	**	**	**
120	12 pF	**	**	**	**
130	13 pF	**	**	**	**
150	15 pF	**	**	**	**
180	18 pF	**	**	**	**
200	20 pF	**	**	**	**
220	22 pF	**	**	**	**
240	24 pF	**	**	**	**
270	27 pF	**	**	**	**
300	30 pF	**	**	**	**
330	33 pF	**	**	**	**
360	36 pF	**	**	**	**
390	39 pF	**	**	**	**
430	43 pF	**	**	**	**
470	47 pF	**	**	**	**
510	51 pF	**	**	**	**
560	56 pF	**	**	**	**
620	62 pF	**	**	.	.
680	68 pF	**	**	.	.
750	75 pF	**	**	.	.
820	82 pF	**	**	.	.
910	91 pF	**	**	.	.
101	100 pF	**	**	.	.



DSCC PACKAGING QUANTITIES (1) (2) (3)							
		7" REEL QUANTITIES		11 1/4" AND 13" REEL QUANTITIES		BULK QUANTITIES	
BODY SIZE	TAPE SIZE	PAPER TAPE PACKAGING CODE	PLASTIC TAPE PACKAGING CODE	PAPER TAPE PACKAGING CODE	PLASTIC TAPE PACKAGING CODE	VIAL PACKAGING CODE	WAFFLE PACKAGING CODE
0805	8 mm	C: 3000/J: 1000	T: 3000/J: 1000	P: 10 000	R: 10 000	B: 100	N/a

Notes:

(1) Vishay Vitramon uses •• paper carrier and • plastic carrier tape

(2) REFERENCE: EIA Standard RS 481 - "Taping of Surface Mount Components for Automatic Placement"

(3) N/a = Not available



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.