




PMSST-05-18-SP-03.50-S

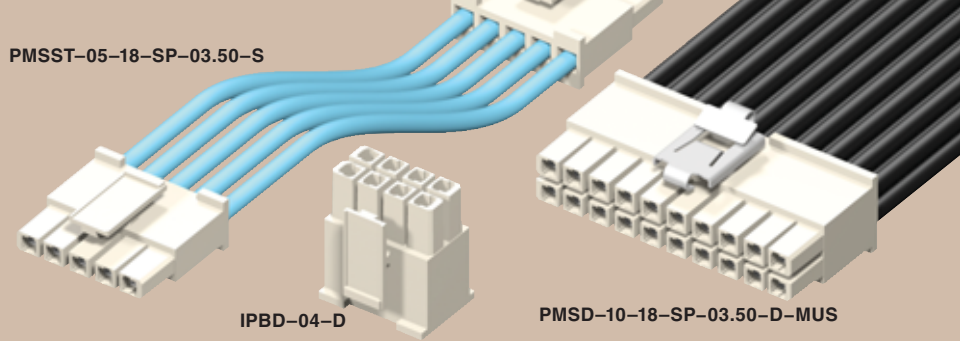

POWER MATE™ CABLE PMSD, PMSDT, PMSS, PMSST, IPBD SERIES

Mates with:
IPBT

SPECIFICATIONS

For complete specifications see www.samtec.com?PMSD, www.samtec.com?PMSDT, www.samtec.com?PMSS, www.samtec.com?PMSST or www.samtec.com?IPBD

Insulator Material:

Valox 457

Contact Material:

Phosphor Bronze

Plating:

Sn over 50µ" (1,27µm) Ni

Operating Temp Range:

-40°C to +105°C (PVC)

-55°C to +125°C (*Teflon®)

Voltage Rating:

22 & 24 AWG = 300 VAC

16, 18 & 20 AWG = 600 VAC

Wire:

16 to 24 AWG

RoHS Compliant:

Yes



APPLICATION SPECIFIC OPTION

- Color coded cables (*Teflon® N/A).
 - Other sizes/pin counts.
 - 20 AWG/300 Volts
- Call Samtec.

TYPE	PINS PER ROW	WIRE GAUGE	LEAD STYLE	ASSEMBLED LENGTH	END OPTION	LATCH OPTION
PMSD = Double Row PVC Cable	-02, -03, -04, -05, -10, -15	-16 -18 -206 (20 AWG/ 600 volts)	-SP = Standard Power	-“XX.XX” = Wire Length in Inches (88,90mm) 03.50" min.	-S = Single End -D = Double End (Latch required)	
PMSDT = Double Row *Teflon® Cable (18 Wire Gauge only)		-22 -24				
PMSS = Single Row PVC Cable (-02, -03, -04, -05)						
PMSST = Single Row *Teflon® Cable (18 Wire Gauge only)						

PMSD/PMSDT

PMSS/PMSST

-D-MUX
-D-LUS

*Teflon® is a trademark of Dupont.

- M = Single Ended, Metal Latches PMSD/PMSDT only (Leave blank for plastic)
- Double Ended (-D) Crossed requires PMSD/PMSDT
- LUS = Plastic Latch up, straight
- LDS = Plastic Latch down, straight
- LUX = Plastic Latch up, crossed
- LDX = Plastic Latch down, crossed
- MUS = Metal Latch up, straight
- MDS = Metal Latch down, straight
- MUX = Metal Latch up, crossed
- MDX = Metal Latch down, crossed

TYPE	POSITIONS PER ROW	ROW OPTION	LATCH OPTION	TYPE	WIRE GAUGE	01	T	LEAD STYLE
IPBD = Body, Loose	-02, -03, -04, -05, -10, -15 (-D only)	-S = Single Row -D = Double Row	-M = Metal Latch (Leave blank for plastic latch) (-D only)	CC69L = Contact, Loose	-2024 = 20 to 24 AWG -1620 = 16 to 20 AWG		-T = Tin	-SP = Standard Power
	-02, -03, -04, -05 (-S only)			CC69R = Contact, Full Reel (4,000 Parts per Reel)				

-S

-D

-M
(-D ONLY)

HAND TOOLS

16 to 20 AWG:
CAT-HT-169-1620-11
20 to 24 AWG:
CAT-HT-169-2024-11

Note: For wiring option information refer to drawing on web.

Note: Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047

SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299

SAMTEC NORDIC/BALTIC • Tel: +46-84477280 • Fax: +46-87420413

SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 • Fax: 65 6841-1502

SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520

SAMTEC FRANCE • Tel: 33 01 60 95 06 60 • Fax: 33 01 60 95 06 61

SAMTEC ISRAEL • Tel: 972-3-7526600 • Fax: 972-3-7526690

SAMTEC JAPAN • Tel: 045-475-1385 • Fax: 045-475-1340

SAMTEC CHINA • Tel: 86-21-61103766 • Fax: 86-21-5423 4575

SAMTEC INDIA • Tel: +91-80-3272 1612 • Fax: +91-80-4152 8187

SAMTEC KOREA • Tel: 82-31-717-5685 • Fax: 82-31-717-5681

SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112 • Fax: 27 86 6714432

SAMTEC UK • Tel: 44 01236 739292 • Fax: 44 01236 727113

SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315

SAMTEC TAIWAN • Tel: 886-2-2735-6109 • Fax: 886-2-2735-5036

SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745