

Features

- Compact, moisture resistant package
- Low LED current
- Passive resistance output



Description

This optocoupler consists of an LED input optically coupled to a photocell. The photocell resistance is high when the LED current is "off" and low resistance when the LED current is "on".

Absolute Maximum Ratings

Storage Temperature	-40 to +75°C
Operating Temperature	-40 to +75°C
Soldering Temperature (1)	260°C
Isolation Voltage (peak)	2000V

- Note:
- (1) >2 mm from case for <5 sec.
 - (2) Derate linearly to 0 at 75°C
 - (3) The Rise Time, T_R , is the time required for the dark to light change in conductance to reach 63% of its final value.

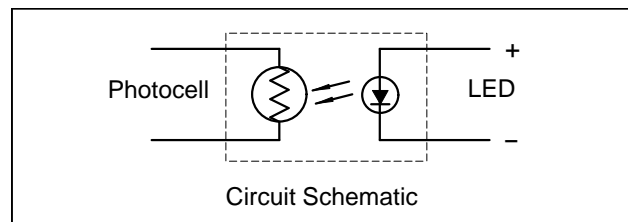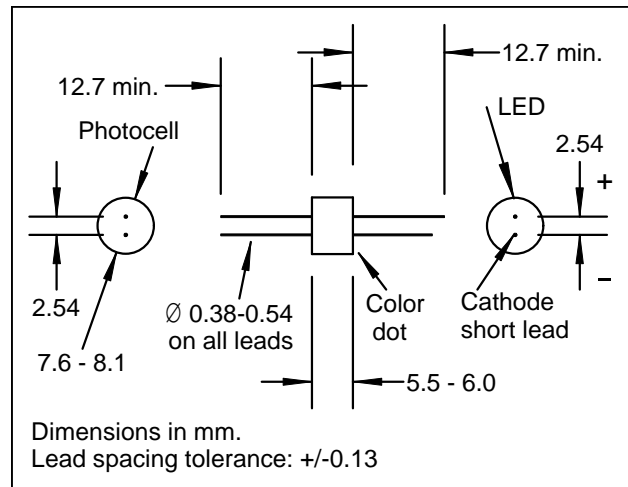

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Min	Typ	Max	Units	Test Conditions
LED						
I_F	Forward Current			40	mA	(2)
V_F	Forward Voltage			2.5	V	$I_F = 16 \text{ mA}$
I_R	Reverse Current			3.0	μA	$V_R = 4\text{V}$
Cell						
V_C	Maximum Cell Voltage			100	V	(Peak AC or DC)
P_D	Power Dissipation			50	mW	(2)
Coupled						
R_{ON}	On Resistance:	NSL-28		400	Ω	$I_F = 20 \text{ mA}$
		NSL-28AA		2.5	K Ω	
		NSL-28AA	5		K Ω	
R_{OFF}	Off Resistance:	NSL-28	10		M Ω	10 sec after $I_F = 0$, 5Vdc on cell.
		NSL-28AA	1		M Ω	
T_R	Rise Time:	NSL-28		5	msec	Time to 63% of final conductance @ $I_F = 16\text{mA}$ (3)
		NSL-28AA		0.5	msec	
T_F	Decay Time	NSL-28		80	msec	Time to 100K Ω after removal of $I_F = 16\text{mA}$
		NSL-28AA		60	msec	
	Cell Temp Coefficient:	NSL-28		0.7	%/ $^\circ\text{C}$	$I_F > 5 \text{ mA}$
		NSL-28AA		1.0	%/ $^\circ\text{C}$	

Specifications subject to change without notice

103065 REV 1

5200 St. Patrick St., Montreal
Que., H4E 4N9, Canada
Tel: 514-768-8000
Fax: 514-768-8889

The Old Railway, Princes Street
Ulverston, Cumbria, LA12 7NQ, UK
Tel: 01 229 581 551
Fax: 01 229 581 554